

---

ABB MEASUREMENT & ANALYTICS | DATA SHEET

# **Sensyflow FMT400-VTS, FMT400-VTCS**

## Thermal Mass Flowmeter



# Measurement made easy

## **Direct mass flow measurement of gases**

- No additional pressure and temperature compensation

## **Wide measuring range up to 1:100**

## **High measuring accuracy**

## **Quick response time $\leq 0.5$ s**

## **Negligible pressure loss**

## **No moving parts, no wear, maintenance-free**

## **Defined and reproducible mounting position in the middle of the pipeline**

## **Contents**

<b>1 General information .....</b>	<b>4</b>
1.1 Principle of operation and construction .....	4
1.2 Type overview .....	5
1.3 Overview Sensyflow FMT400-VTS, version for process engineering.....	5
1.4 Overview Sensyflow FMT400-VTCS, hygienic version.....	6
<b>2 Specifications .....</b>	<b>7</b>
2.1 Parameterization .....	8
<b>3 Sensyflow FMT400-VTS, version for process engineering .....</b>	<b>9</b>
3.1 Dimensions.....	9
3.2 Installation instructions .....	10
3.3 Ordering information.....	14
3.4 Additional ordering information for calibration.....	16
<b>4 Sensyflow FMT400-VTCS, hygienic version .....</b>	<b>17</b>
4.1 Dimensions.....	17
4.2 Measuring ranges at atmospheric pressure.....	18
4.3 Ordering information.....	19
4.4 Additional ordering information for calibration.....	20
<b>5 Electrical connections .....</b>	<b>21</b>
<b>6 Recommended steadyng lengths according to DIN EN ISO 5167-1 .....</b>	<b>22</b>
<b>7 Questionnaire .....</b>	<b>23</b>

## 1 General information

### 1.1 Principle of operation and construction

The devices of the Sensyflow FMT400-series operate according to the thermal measuring principle of a hot film anemometer. This measuring method determines the gas mass flow directly. Taking the standard density of the gases into consideration, the standard volume flow rate can be displayed without additional pressure and temperature compensation.

Sensyflow FMT400-VTS is used in the field of process engineering and Sensyflow FMT400-VTCS in the food and beverage industry for flow measurement of gases and gas mixtures.

The measuring systems of the FMT400 series are made up of a transmitter, flowmeter sensor and a pipe component. The transmitter directly delivers an electrically isolated 0/4 ... 20 mA output signal. The flowmeter sensor is designed as flange-mounted and is installed in the pipe component in a defined way.


The pipe component is available in nominal diameters ranging from DN 25 ... DN 200 (1 ... 8") and in various designs. It is also possible to install the flowmeter sensor in square ducts or pipes of any diameter by using a weld-on adapter.

#### Physics of measurement

Thermal flow metering procedures use different ways to evaluate the flow dependent cooling of a heated resistor as measuring signal.

In a hotfilm anemometer with temperature difference control, the heated platinum resistor is maintained at a constant overtemperature in relation to an unheated platinum sensor inside the gas flow. The heating power required for maintaining the overtemperature depends directly on the flow rate and the material properties of the gas. With a known (and constant) gas composition the mass-flow can be determined by electronically evaluating the heater current/mass-flow curve without additional pressure and temperature compensation.

Together with the standard density of the gas this results directly in the standard volume flow. Considering the high measuring range dynamics up to 1:150, an accuracy smaller than 1 % of the measuring value is achieved.

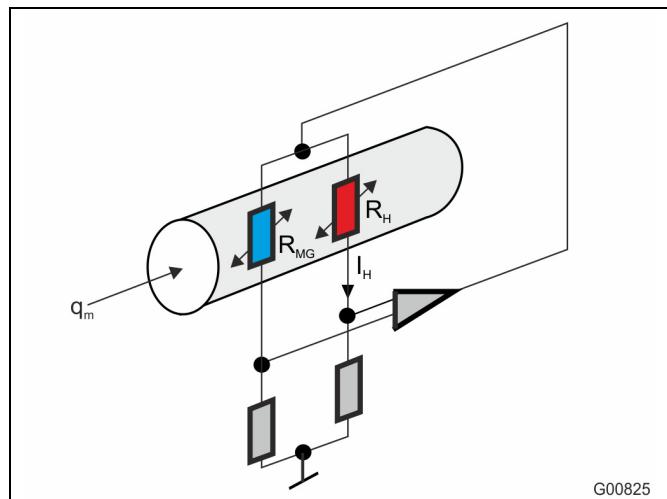

G00825

Fig. 1: Analog measuring principle

$q_m$	Gas mass-flow
$R_{MG}$	Gas temperature measuring resistor
$R_H$	Heating resistor
$I_H$	Actual value of heater

The gas stream flows past two temperature-sensitive resistors  $R_H$  and  $R_{MG}$  which are part of an electrical bridge circuit. Due to the chosen resistance ratio  $R_H < R_{MG}$ ,  $R_H$  is heated by the current  $I_H$ , and  $R_{MG}$  adopts the same temperature as the gas. The current  $I_H$  is preset by the electronic control circuit to produce a constant temperature difference between the heated resistor  $R_H$  and the temperature of the gas.

The electrical power generated with resistor  $R_H$  exactly compensates its loss of heat to the gas flow. As this loss of heat is dependent on the number of particles which collide with the surface of resistor  $R_H$ ,  $I_H$  represents a measure of the mass flow rate.

#### Typical applications

- Gas flow measurement in the chemical and processing industries,
- Compressed air balances,
- Gas burner control,
- Gas measurement for air separation systems,
- Activation air measurement in sewage plants,
- Hydrogen measurement in processes.

## 1.2 Type overview

Type	FMT400-VTS	FMT400-VTCS Hygienic version
Application	Process engineering	Food and beverage industry
Measured gases	Flow rate of gases and gas mixtures with known composition	Flow rate of air, N <sub>2</sub> , CO <sub>2</sub> , O <sub>2</sub>
Explosion protection	Manufacturer's Declaration zone 2 / 22 II 3G EEx nA ib II T4; II 3D T 135°C IP 65	
Design / Dimensions / Weight	dependent on nominal size	
Material (standard)	1.4571, Ceramics	Stainless steel e. g. 1.4301
Process connection (standard)	Flange acc. to EN1092-1 form B1, PN 40 (DIN 2635 form C) or ASME B 16.5 Cl. 150 / 300	Pipe fitting S acc. to DIN 11851 or FG flange
System components	Transmitter Flowmeter sensor Pipe component, design 1 or 2 or weld-on adapter	Transmitter Flowmeter sensor Pipe component
Standard nominal pipe sizes	Pipe component design 1: wafer flange DN 40, 50, 65, 80, 100, 125, 150, 200 – ASME 1 1/2“, 2“, 3“, 4“, 6“, 8“ Pipe component design 2: partial measuring section DN 25, 40, 50, 65, 80 – ASME 1“, 1 1/2“, 2“ Weld-on adapter for square ducts or pipe diameters ≥ DN 100 (4“)	Pipe component hygienic version: partial measuring section DN 25, 40, 50, 80
Degree of protection	IP 65 / NEMA 4X	

## 1.3 Overview Sensyflow FMT400-VTS, version for process engineering


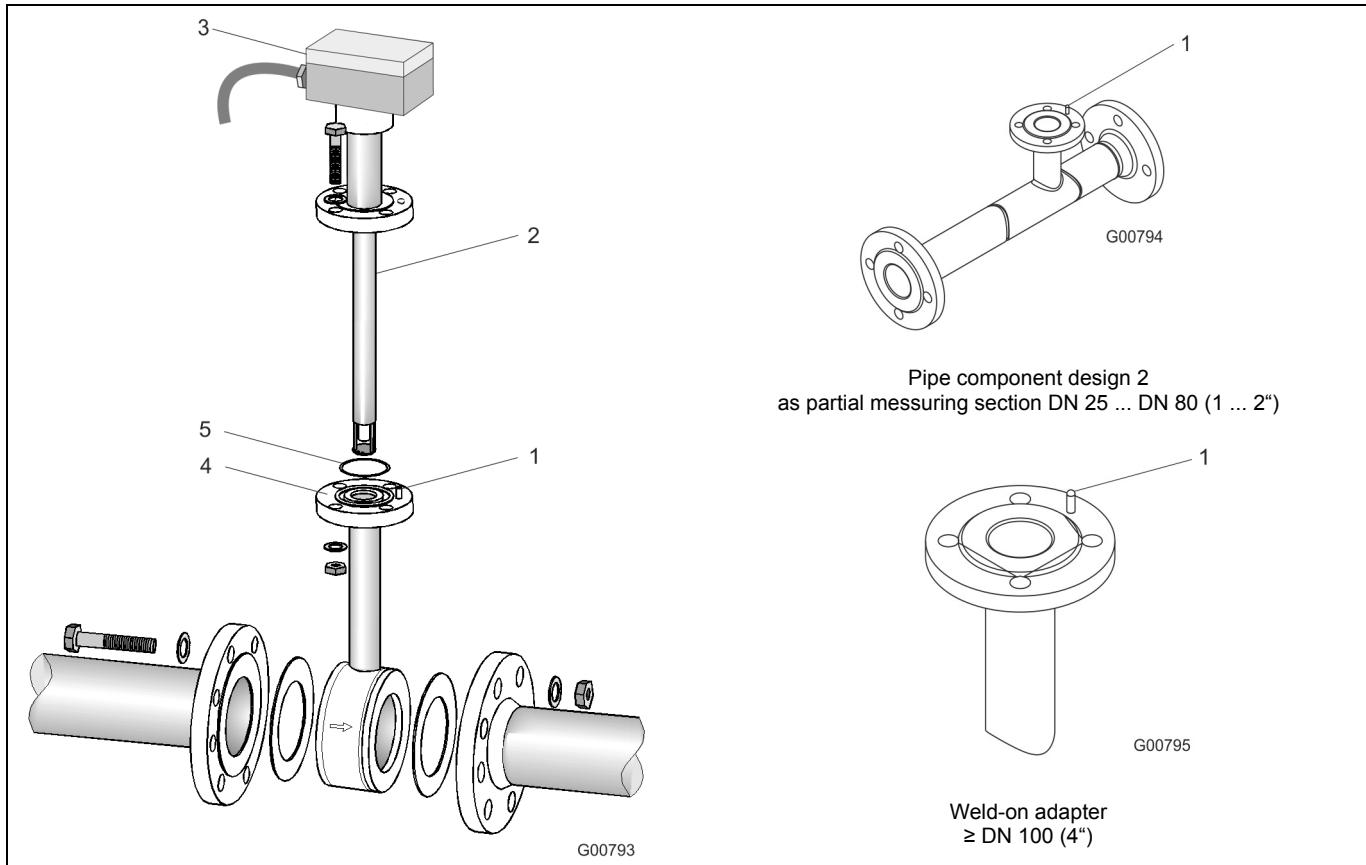


Fig. 2

- 1 Centering pin on outlet side
- 2 Flowmeter sensor FMT400-VTS
- 3 Transmitter
- 4 Pipe component design 1 in wafer flange design DN 40 ... DN 200 (1 1/2 ... 8")
- 5 Sealing ring

#### 1.4 Overview Sensyflow FMT400-VTCS, hygienic version

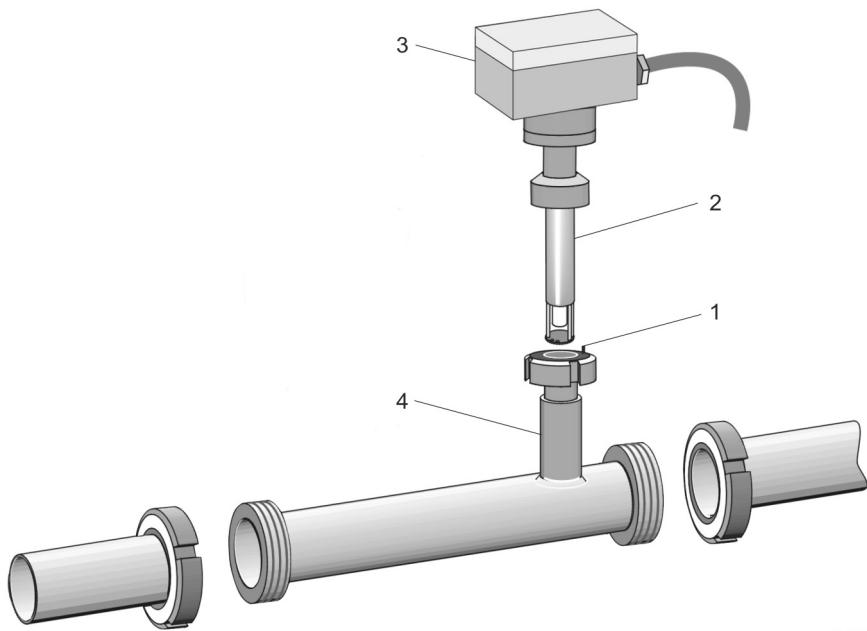

G00801

Fig. 3: Process connections with pipe fitting S acc. to DIN 11851. Flowmeter sensor and pipe component also available with FG flanges.  
FG flanges on the pipe component are always plain on both sides (without groove).

- 1 Centering pin on outlet side
- 2 Flowmeter sensor FMT400-VTCS
- 3 Transmitter
- 4 Pipe component

## 2 Specifications

Type	FMT400-VTS				FMT400-VTCS Hygienic version			
Measured variable (measured gases)	Flow of gases and gas mixtures with known composition				Flow of air, N <sub>2</sub> , CO <sub>2</sub> , O <sub>2</sub>			
<b>Measuring ranges</b> Nominal diameters (DN)	$q_{\min}$ <b>kg/h</b>	$q_{\max}$ <b>kg/h</b>	$q_{\min}$ <b>Nm<sup>3</sup>/h</b>	$q_{\max}$ <b>Nm<sup>3</sup>/h</b>	$q_{\min}$ <b>kg/h</b>	$q_{\max}$ <b>kg/h</b>	$q_{\min}$ <b>Nm<sup>3</sup>/h</b>	$q_{\max}$ <b>Nm<sup>3</sup>/h</b>
DN 25	0 ... 160	0 ... 120	For 0 °C (32 °F) / 1013.25 hPa (14.696 psia)	0 ... 160	0 ... 120	For 0 °C (32 °F) / 1013.25 hPa (14.696 psia)	0 ... 120	0 ... 120
DN 40	0 ... 430	0 ... 330		0 ... 430	0 ... 330		0 ... 330	0 ... 330
DN 50	0 ... 700	0 ... 540		0 ... 700	0 ... 540		0 ... 540	0 ... 540
DN 65	0 ... 1,200	0 ... 940		0 ... 1,200	0 ... 940		0 ... 1,200	0 ... 1,200
DN 80	0 ... 1,700	0 ... 1,300		0 ... 1,700	0 ... 1,300		0 ... 1,700	0 ... 1,300
DN 100	0 ... 3,000	0 ... 2,300		0 ... 3,000	0 ... 2,300		0 ... 3,000	0 ... 3,000
DN 125	0 ... 5,100	0 ... 3,900		0 ... 5,100	0 ... 3,900		0 ... 3,900	0 ... 3,900
DN 150	0 ... 8,000	0 ... 6,200		0 ... 8,000	0 ... 6,200		0 ... 6,200	0 ... 6,200
DN 200	0 ... 13,000	0 ... 10,000		0 ... 13,000	0 ... 10,000		0 ... 10,000	0 ... 10,000
Up to 3000 mm (rectangular ducts and larger diameters on request)	0 ... 2,700,000	0 ... 2,100,000		0 ... 2,700,000	0 ... 2,100,000		0 ... 2,100,000	0 ... 1,300,000
<b>Measuring ranges</b> Nominal diameters (inch)	$q_{\min}$ <b>lbs/h</b>	$q_{\max}$ <b>lbs/h</b>	$q_{\min}$ <b>SCFM</b>	$q_{\max}$ <b>SCFM</b>	For 15 °C (59 °F) / 1013.25 hPa (14.696 psia)			
1,0	0 ... 310	0 ... 65						
1,5	0 ... 840	0 ... 180						
2,0	0 ... 1,400	0 ... 310						
3,0	0 ... 3,500	0 ... 760						
4,0	0 ... 6,000	0 ... 1,300						
6,0	0 ... 16,500	0 ... 3,600						
8,0	0 ... 28,500	0 ... 6,200						
120,0	0 ... 6,000,000	0 ... 1,300,000						
(rectangular ducts and larger diameters on request)								
Notes regarding measuring ranges	<p>The above values are reference values for applications involving air or nitrogen under atmospheric conditions (other gases available upon request).</p> <p>The values for <math>q_{\max}</math> can be increased by approx. 10 % upon request (with lower accuracy in the extended range).</p> <p>With hydrogen and helium, the lower range limit is typically approx. 10 % of the upper range limit.</p>							
<b>Measuring errors</b>	Under calibration conditions in specified measuring range							
Air, nitrogen	$\leq \pm 0.9$ % of the measured value $\pm 0.05$ % of the possible end value in this nominal diameter (see measuring ranges)							
other gases	$\leq \pm 1.8$ % of the measured value $\pm 0.10$ % of the possible end value in this nominal diameter (see measuring ranges)							
	Special calibration on request							
Reproducibility	$< 0.25$ % of the measured value, $t_{\text{meas}} = 10$ s							
Effect of the temperature of the measured medium	$< 0.05$ % / K of the measured value (depending on the type of gas)							
Effect of the pressure of the measured medium	$< 0.2$ % / 100 kPa (/ bar) of the measured value (depending on the type of gas)							
Response time	$T_{63} = 0.5$ s				$T_{63} = 2$ s			

Type	FMT400-VTS	FMT400-VTCS Hygienic version
<b>Operating conditions</b>		
Recommended steadyng lengths	According to DIN EN ISO 5167-1 Min. inflow 15 x D, outflow 5 x D	
<b>Ambient conditions</b>		
Transmitter ambient temperature	-25 ... 70 °C (-13 ... 158 °F) Zone 2/22 version: -20 ... 50 °C (-4 ... 122 °F)	
CIP/SIP cleaning	-	With device switched off
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)	
<b>Process conditions</b>		
Operating temperature of measured medium (flowmeter sensor)	Standard range: -25 ... 150 °C (-13 ... 302 °F) Extended range: -25 ... 300 °C (-13 ... 572 °F) Zone 2/22 version: -20 ... 130 °C (-4 ... 266 °F)	-25 ... 150 °C (-13 ... 302 °F)
Operating pressure	4 x 10 <sup>6</sup> Pa (40 bar [580 psi])	1.6 x 10 <sup>5</sup> Pa (16 bar [232 psi]) threaded pipe connection S (for DN 80: 10 x 10 <sup>5</sup> Pa (10 bar [145 psi])) 10 x 10 <sup>5</sup> Pa (10 bar [145 psi]) FG flange
Pressure drop (logarithmic representation)	<p>&lt; 1.0 kPa (10 mbar), typical value 0.1 kPa (1 mbar)</p> <p>Mass flow rate [kg/h] →</p> <p>G00796</p>	
<b>Power supply</b>		
Voltage	24 V DC ± 25 %; 24 V AC ± 25 %, 48 ... 62 Hz	
Power consumption	< 15 W, current consumption < 600 mA, minimum fuse protection 2 A time-lag	
Cable entry	M20 x 1.5	
<b>Output</b>		
Analog output	0/4 ... 20 mA, load < 750 Ω, electrically isolated, failure message < 3.5 or > 22 mA	
Degree of protection	IP 65, NEMA 4X	





## 2.1 Parameterization

The output signal range of the FMT400-VTS / VTCS flowmeters can be set to either 0 ... 20 mA or 4 ... 20 mA. Additionally, the measuring range window can be extended such that a smaller span corresponds to a 20 mA current signal. Alarm signalling is possible at < 3.5 mA or > 22 mA (selectable).

The measuring instrument parameters can be set via the LCI-adapter. A standard PC allows you to change the used output signal and to adjust the measuring range.

### 3 Sensyflow FMT400-VTS, version for process engineering

#### 3.1 Dimensions

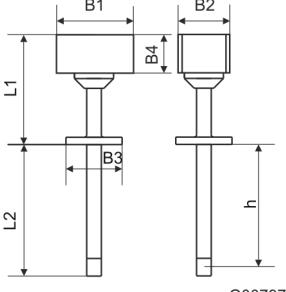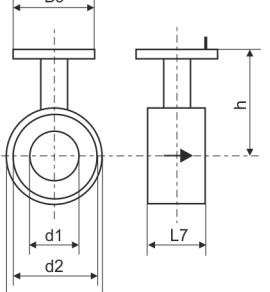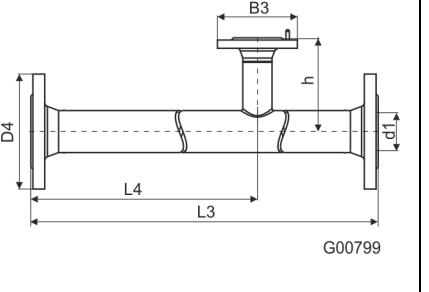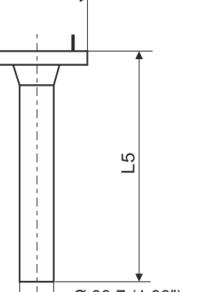Flowmeter sensor	Type 1 pipe component Wafer type	Type 2 pipe component Measuring section	Weld-on adapter DN 100 (4") and higher
			

EN 1092-1 form B1, PN 40

Nominal diameter		L2	h	D1	d1	d2	D4	L3	L4
DN 25		269 (10.59)	263 (10.35)	-	28.5 (1.12)	-	115 (4.53)	600 (23.62)	486 (19.13)
DN 40				94 (3.70)	43.1 (1.70)	88 (3.46)	150 (5.91)	860 (33.86)	731 (28.78)
DN 50	B1 = 125 (4.92)			109 (4.29)	54.5 (2.15)	102 (4.02)	165 (6.50)	1000 (39.37)	837 (32.95)
DN 65	B2 = 80 (3.15)			129 (5.08)	70.3 (2.77)	122 (4.80)	185 (7.28)	1400 (55.12)	1190 (46.85)
DN 80	B3 = Ø115 (4.53)			144 (5.67)	82.5 (3.25)	138 (5.43)	200 (7.87)	1700 (66.93)	1450 (57.09)
DN 100	B4 = 58 (2.28)			170 (6.69)	107.1 (4.22)	162 (6.38)	235 (9.25)	2200 (86.61)	1870 (73.62)
DN 125	L1 = 188 (7.40)			196 (7.72)	131.7 (5.19)	188 (7.40)	270 (10.63)	2700 (106.3)	2300 (90.55)
DN 150	L5 = 450 (17.72)			226 (8.90)	159.3 (6.27)	218 (8.58)	300 (11.81)	3200 (125.98)	2720 (107.09)
DN 200	L7 = 65 (2.56)			293 (11.54)	206.5 (8.13)	285 (11.22)	375 (14.76)	4200 (165.35)	3580 (140.94)
> 350		431 (16.97)	425 (16.73)						
> 700		781 (30.75)	775 (30.51)						

ASME B 16.5, Cl. 150 (ANSI), Sch 40 S

1"		269 (10.59)	263 (10.35)	-	26.6 (1.05)	-	108 (4.25)	560 (22.05)	454 (17.87)
1 1/2"	B1 = 125 (4.92)			85 (3.35)	40.9 (1.61)	73 (2.87)	127 (5.00)	864 (34.02)	741 (29.17)
2"	B2 = 80 (3.15)			103 (4.06)	52.6 (2.07)	92 (3.62)	154 (6.06)	1003 (39.49)	846 (33.31)
3"	B3 = Ø115 (4.53)			35 (5.31)	78.0 (3.07)	127 (5.00)	-	-	-
4"	B4 = 58 (2.28)			173 (6.81)	102.4 (4.03)	157 (6.18)	-	-	-
6"	L1 = 188 (7.40)			221 (8.70)	154.2 (6.07)	216 (8.50)	-	-	-
8"	L5 = 450 (17.72)			278 (10.94)	202.7 (7.98)	270 (10.63)	-	-	-
> 14"	L7 = 65 (2.56)			431 (16.97)	425 (16.73)				
> 28"		781 (30.75)	775 (30.51)						

ASME B 16.5, Cl. 300 (ANSI), Sch 40 S

1"		269 (10.59)	263 (10.35)	-	26.6 (1.05)	-	123.9 (4.88)	560 (22.05)	454 (17.87)
1 1/2"	B1 = 125 (4.92)			94 (3.70)	40.9 (1.61)	73 (2.87)	155.4 (6.12)	864 (34.02)	741 (29.17)
2"	B2 = 80 (3.15)			110 (4.33)	52.6 (2.07)	92 (3.62)	165.1 (6.50)	1003 (39.49)	846 (33.31)
3"	B3 = Ø115 (4.53)			148 (5.83)	78.0 (3.07)	127 (5.00)	-	-	-
4"	B4 = 58 (2.28)			180 (7.09)	102.4 (4.03)	157 (6.18)	-	-	-
6"	L1 = 188 (7.40)			249 (9.80)	154.2 (6.07)	216 (8.50)	-	-	-
8"	L5 = 450 (17.72)			307 (12.09)	202.7 (7.98)	270 (10.63)	-	-	-
> 14"	L7 = 65 (2.56)			431 (16.97)	425 (16.73)				
> 28"		781 (30.75)	775 (30.51)						

Dimensions in mm (inch)

### 3.2 Installation instructions

#### 3.2.1 Weld-on adapter for Sensyflow FMT400-VTS

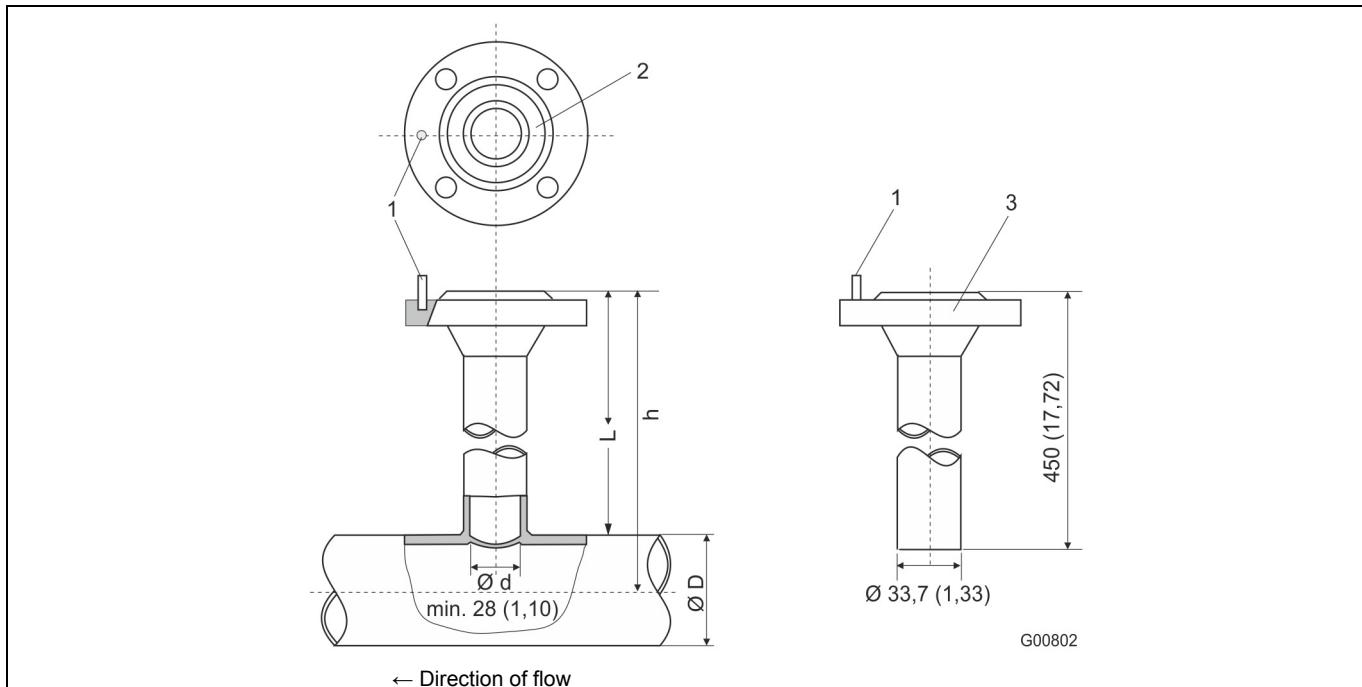


Fig. 4: Dimensions in mm (inch)

- |                       |                                |
|-----------------------|--------------------------------|
| 1 Centering pin       | 3 Connection flange DN 25 (1") |
| 2 Sealing ring groove | D Outer pipe diameter          |

Flowmeter sensor length h in mm (inch)	Outer pipe diameter min. / max. in mm (inch)
263 (10.35)	100 ... 350 (3.94 ... 13.78)
425 (16.73)	> 350 ... 700 (13.78 ... 27.56)
775 (30.51)	> 700 ... 1400 (27.56 ... 55.12) <sup>1)</sup>

<sup>1)</sup> This maximum pipe diameter specification is only valid when installing the sensor unit centrically in the pipe.

For larger diameters or angular ducts a non-centric sensor position is taken into account for calibration.



#### IMPORTANT (NOTE)

Prior to mounting the weld-on adapters must be shortened to length:  $L = h - 1/2 D_{outer}$ .

The distance  $h$  between the upper flange edge and the pipe center line must be within a tolerance of  $\pm 2$  mm (0.08").

The right angle to the pipe center line must be observed (max. tolerance  $\pm 2^\circ$ ).

The centering pin of the adapter must be aligned centrically with the pipe center line in flow direction (on outlet run side, downstream of the measuring point).

### 3.2.2 Weld-on adapter with ball valve for Sensyflow FMT400-VTS

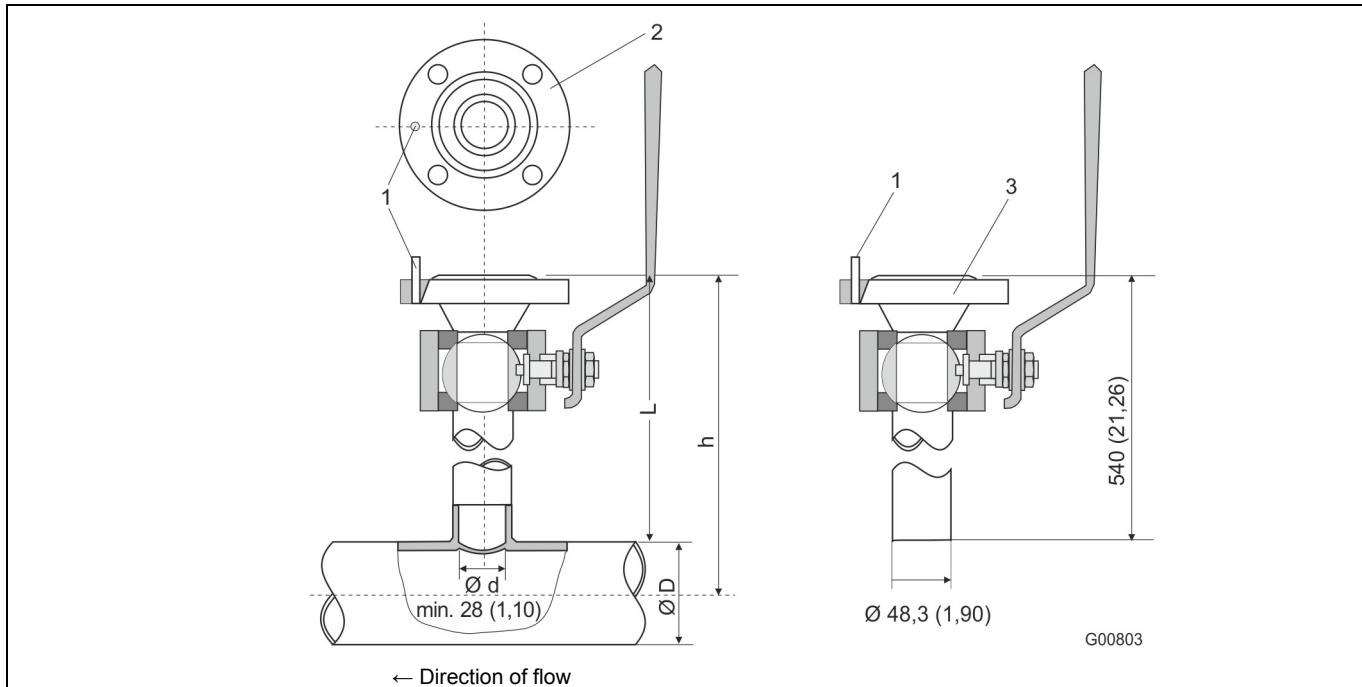


Fig. 5: Dimensions in mm (inch)

- |                       |                                |
|-----------------------|--------------------------------|
| 1 Centering pin       | 3 Connection flange DN 25 (1") |
| 2 Sealing ring groove | D Outer pipe diameter          |

Flowmeter sensor length h in mm (inch)	Outer pipe diameter min. / max. in mm (inch)
263 (10.35)	100 ... 150 (3.94 ... 5.91)
425 (16.73)	> 150 ... 500 (5.91 ... 19.69)
775 (30.51)	> 500 ... 1150 (19.69 ... 45.28) <sup>1)</sup>

<sup>1)</sup> This maximum pipe diameter specification is only valid when installing the sensor unit centrally in the pipe.

For larger diameters or angular ducts a non-centric sensor position is taken into account for calibration.



#### IMPORTANT (NOTE)

Prior to mounting the weld-on adapters must be shortened to length:  $L = h - 1/2 D_{outer}$ .

The distance  $h$  between the upper flange edge and the pipe center line must be within a tolerance of  $\pm 2$  mm (0.08").

The right angle to the pipe center line must be observed (max. tolerance  $\pm 2^\circ$ ).

The centering pin of the adapter must be aligned centrically with the pipe center line in flow direction (on outlet run side, downstream of the measuring point).

### 3.2.3 Integrated hot tap fitting for Sensyflow FMT400-VTS

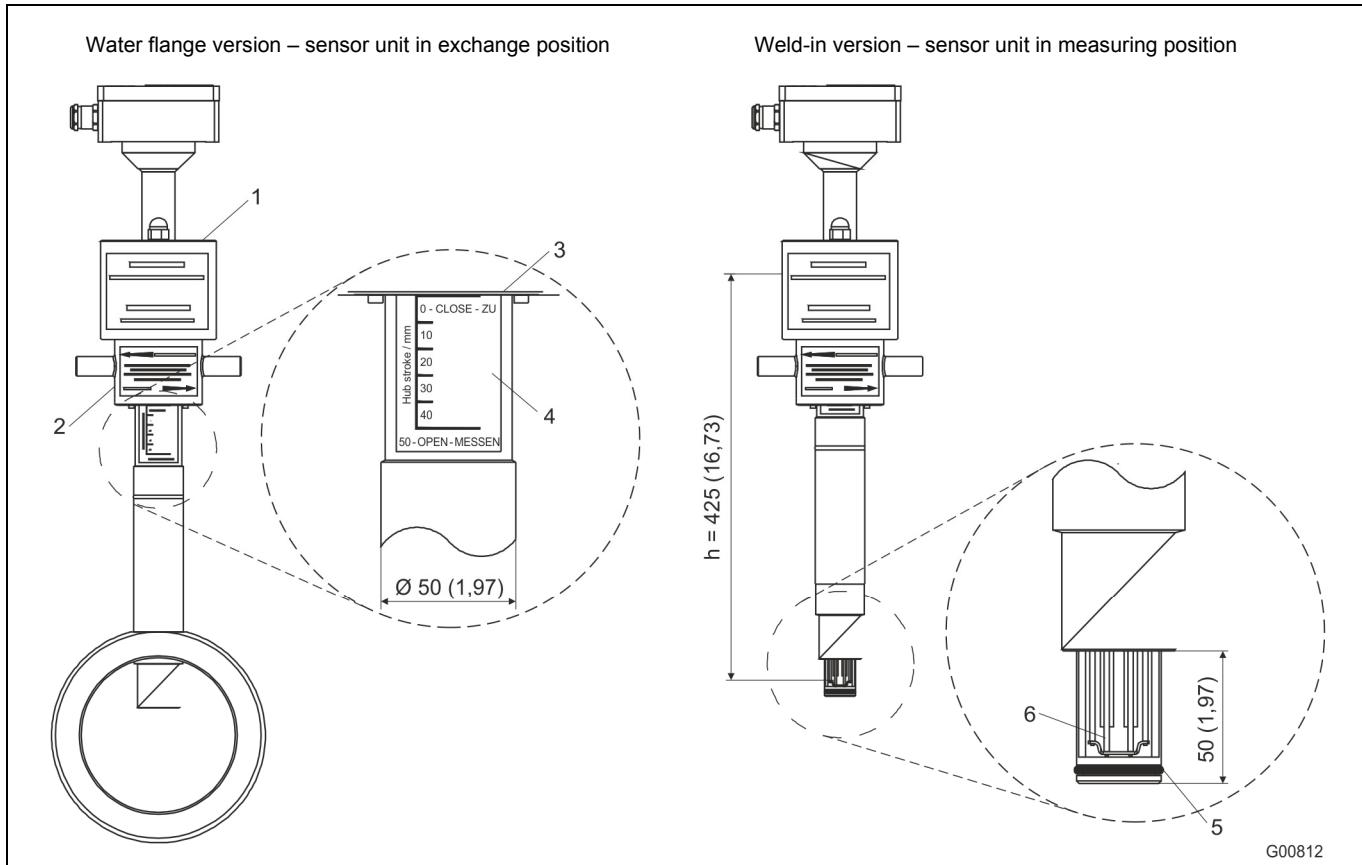


Fig. 6: Dimensions in mm (inch)

- |                             |   |
|-----------------------------|---|
| 1 Covers for DN 25 flange   | 4 Display of sensor unit position, 50 mm (1,97") stroke |
| 2 Spigot nur                | 5 Sealing ring  |
| 3 Bottom edge of spigot nut | 6 Sensor elements                                       |

Flowmeter sensor length h	
Water flange version	Weld-in version
h = 263 mm (10.35") for DN 50, DN 65 and DN 80 / 2", 3"	h = always 425 mm (16.73")
h = 425 mm (16.73") for DN 100, DN 125, DN 150 and DN 200 / 4", 6", 8"	

The integrated hot tap fitting is used instead of the pipe component and weld-on adapter assembly described above if the flowmeter sensor must be exchangeable during operation with virtually no gas escaping from the system.

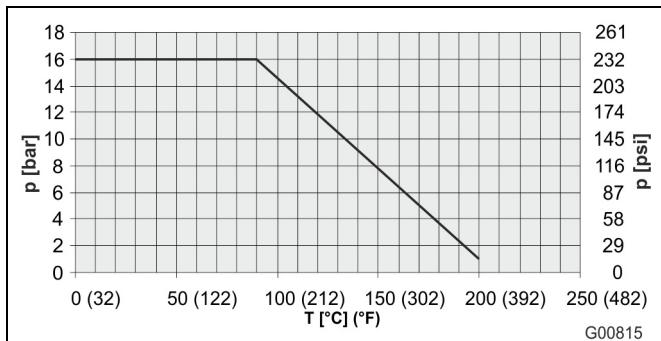


Fig. 7: Maximum pressure/temperature values for the integrated hot tap fitting

It is recommended to use the hot tap fitting for measurements in main conduits (e.g. compressed air systems) or for measuring points which otherwise require rinsing prior to removing the flowmeter sensor. As a rule, hot tap fittings should be preferred for all systems where, otherwise, the entire system or parts of it must be switched off to replace a flowmeter sensor.

#### Handling:

The flowmeter sensor is screwed to the hot tap fitting through the DN 25 flange. Then the cover is put on. The sensor unit is set from the exchange position to the measuring position by turning the spigot nut. The bottom edge of the spigot nut indicates the current sensor unit position (see Detail A, sensor unit is in exchange position). Only when the measuring position 50 – OPEN - MESSEN (lower stop of the spigot nut) is reached, the sensor elements are placed exactly in the center of the pipe and exact measurement is ensured.



#### IMPORTANT (NOTE)

For integrated hot tap fitting in wafer flange design DN 65, use connection flange PN16 with 4 screw holes on the process side. Wafer flange versions 2 ... 8" only for connection flange ASME B16.5 Cl.150.

### 3.3 Ordering information

	Version number	1 - 6	7	8	9	10	11	12	13	14	15	Main order number	Add. order no.
<b>Sensyflow FMT400-VTS Thermal Mass Flowmeter, for process engineering, for gases, integral mount design</b>	V14222		X	X	X	X	X	X	X	X	X		XXX
<b>Sensor unit</b> Ceramic sensor		0											
<b>Version</b> VTS, process engineering						1							
VTS, process engineering, ATEX Zone 2 / 22						2							
<b>Operating Temperature</b> Standard range						1)	1						
Extended range -25 ... 300 °C (-15 ... 572 °F) (not with Ex-Version)						2							
<b>Measuring Medium</b> Gases, gas mixtures and natural gas (with max. 23.5 Vol% O2 each)						2)	0						
Oxygen / gas mixtures > 23.5 Vol% O2, oil and grease-free, with O2 certificate (max. 150 °C / 302 °F)						1							
Natural gas, with DVGW certificate (max. 80 °C / 176 °F)						2							
Hydrogen, Helium (max. 8 bar / 0.8 MPa / 116 psi, always with process gas calibration)						3)	3						
Ammonia Application						4							
<b>Mounting Length / Material</b> 263 mm (10.4 in.) / AISI 316Ti SST (1.4571) (DN 25 ... DN 350 [1 ... 14 in.])						4)	1	0					
425 mm (17 in.) / AISI 316Ti SST (1.4571) (> DN 350 ... DN 700 [> 14 ... 28 in.])						4)	2	0					
775 mm (31 in.) / AISI 316Ti SST (1.4571) (> DN 700 [> 28 in.])						4)	3	0					
<b>Analog Output</b> 4 ... 20 mA, alarm < 3.5 mA						5)	1						
4 ... 20 mA, alarm > 22 mA						5)	2						
0 ... 20 mA						5)	3						
<b>Number of Characteristic Curves</b> 1 characteristic curve											1		
<b>Certificates: Calibration</b> Factory certificate											0		
DAkkS certificate of calibration with air (not for process gas calibration)											6)	1	
<b>Certificates and Material Traceability</b> Material certificate 3.1 acc. EN 10204												CBB	
Declaration of compliance with the order 2.1 acc. EN 10204												CF3	
<b>Certificates: GOST</b> GOST Russia - metrological approval												CG1	
GOST Kazakhstan - metrological approval												CG2	
<b>Adapter</b> LCI adapter												GL	
<b>Language of documentation</b> German												M1	
English												M5	
Russian												MB	
Western Europe / Scandinavia language package (languages: DE, EN, DA, ES, FR, IT, NL, PT, FI, SV)												MW	
Eastern Europe language package (languages: DE, EL, CS, ET, LV, LT, HU, PL, SK, SL, RO, BG)												ME	
<b>Accessories</b>												Order number	
FMT Power supply unit, housing for rail mounting 62.5 mm x 75 mm x 139 mm, input 230 V AC, output 24 V DC / 2.5 A												7962800	
FMT400-VTS / FMT400-VTCS Blind Cover Thread DN25 / 1 inch with seal, to close flowmeter sensor connection												3KXF003016U0200	
FMT400-VTS / FMT400-VTCS Blind Cover, threat DN 25 / 1 in., with seal, to close flowmeter sensor connection												3KXF421400L0001	
FMT400-VTS / FMT400-VTCS Commissioning Instruction, English												3KXF421002R4401	
FMT400-VTS / FMT400-VTCS Commissioning Instruction, German												3KXF421002R4403	
FMT400-VTS / FMT400-VTCS Commissioning instruction, Language package Eastern Europe												3KXF421002R4494	
FMT400-VTS / FMT400-VTCS Commissioning Instruction, Language package Western Europe / Scandinavia												3KXF421002R4493	
FMT400-VTS / FMT400-VTCS Operating Instruction, Russian												3KXF421002R4222	

- 1) Non-Ex version: -25 ... 150 °C (-15 ... 302 °F), ATEX Zone 2 / 22 version: -20 ... 130 °C (-4 ... 266 °F).
- 2) Not for pure oxygen.
- 3) With measuring medium H2 or He, lower measuring range limit typical 10% of upper limit, in nominal size DN 25 ... DN 50 (1 ... 2 in.): Please use pipe component design 2 with flow straightener.
- 4) Nominal size ranges when using pipe components or weld-on adapters without ball valve.
- 5) Changeable via LCI adapter.
- 6) DAkkS- / ILAC-accredited calibration equipment D-K-15081-01-00.

														Main order number	Add. order no.
	Version number	1 - 6	7-9	10	11	12	13	14	15						
<b>FMT081 pipe component / weld-on adapter, for Sensyflow FMT500-IG and FMT400-VTS</b>	<b>FMT081</b>	<b>XXX</b>	X	X	X	X	X	X	X						
<b>Mounting Length of the Sensor</b>															
263 mm (10.4 in.)										263					
425 mm (17 in.)										425					
775 mm (31 in.)										775					
<b>Measuring Medium</b>															
Gases, gas mixtures, and natural gas (each max. 23.5 vol% O <sub>2</sub> )											A				
Oxygen / gas mixtures > 23.5 Vol% O <sub>2</sub> , oil and grease-free, with O <sub>2</sub> certificate (max. 150 °C / 302 °F)											B				
Natural gas, with DVGW certificate (max. 80 °C / 176 °F)											C				
Hydrogen, Helium											1) D				
<b>Design</b>															
Pipe component 1 in wafer flange version											1				
Pipe component design 2 as partial measuring section											2				
Pipe component design 2 as partial measuring section with integrated flow straightheners											3				
Weld-on adapter											2)	4			
Other											9				
<b>Nominal Diameter</b>															
Selection for weld-on adapter											Y				
DN 25 (1 in.)											3) A				
DN 40 (1-1/2 in.)											4) C				
DN 50 (2 in.)											D				
DN 65 (2-1/2 in.)											5) E				
DN 80 (3 in.)											6) F				
DN 100 (4 in.)											6) G				
DN 125 (5 in.)											6) H				
DN 150 (6 in.)											6) J				
DN 200 (8 in.)											6) L				
Other											7) Z				
<b>Flange Style and Pressure Rating</b>															
Selection for weld-on adapter											0				
DIN PN 40, nominal pressure 40 bar (4 MPa / 580 psi)											1				
ANSI / ASME CL 150, Schedule 40 S											2				
ANSI / ASME CL 300, Schedule 40 S											4) 3				
Other											9				
<b>Process Connection for Flowmeter Sensor</b>															
Standard Sensyflow flange with centering pin											8)	A			
With ball valve, max. 150 °C (302 °F) and 16 bar (1.6 MPa / 232 psi)											9)	G			
With integrated hot tap fitting for max. DN 125 (5 in.). Allows gas-tight flowmeter sensor removal / insertion up to 16 bar (1.6 MPa / 232 psi) or 200 °C (392 °F). For DN 65, use connection flanges PN 16 with 4 screw holes (For pipe component DN 50 ... DN 80, apply Sensor Length h = 263 mm, from DN 100 and for weld-on adapter, apply Sensor Length h = 425 mm)											10)	H			
With integrated hot tap fitting above DN 125 (5 in.) to max. DN 200 (8 in.) / DN 300 (12 in.) with weld-on adapter. Allows gas-tight flowmeter sensor removal / insertion up to 16 bar (1.6 MPa / 232 psi) or 200 °C (392 °F) (Please apply the correct sensor length)											11)	J			
<b>Material</b>															
Stainless steel AISI 316Ti (1.4571)												3			
Carbon steel S 235 (1.0037)												12) 1			
Plastics PE-HD (Polyethylene high-density)												12) 7			
<b>Blind Flange</b>															
DN 25 blind flange to close flowmeter sensor connection, material stainless steel AISI 316Ti (1.4571)															F3
<b>Certificates and Material Traceability</b>															
Material certificate 3.1 acc. EN 10204															CBB
Declaration of compliance with the order 2.1 acc. EN 10204															CF3

Footnotes see next page

- 1) Max. 8 bar / 0.8 MPa / 116 psi. With DN 25 ... DN 50 (1 ... 2 in.): Please use pipe component 2 with flow straightener.
- 2) From DN 100 (4 in.).
- 3) Not available with pipe component 1 in wafer flange version.
- 4) Not available with hot-tap-fitting.
- 5) Not available with flange style ANSI / ASME.
- 6) Not available with pipe component 2 in combination with flange style ANSI / ASME.
- 7) Please specify exact inner pipe diameter.
- 8) Correct sensor length: For pipe component 1 and 2 without ball valve / hot tap fitting: h = 263 mm. For weld-on adapter and pipe diameter up to 350 mm: h = 263 mm, up to 700 mm: h = 425 mm, > 700 mm: h = 775 mm
- 9) Not available with DVGW certificate. Correct sensor length: For pipe component DN 50 ... DN 100: h = 263 mm, from DN 125: h = 425 mm. For weld-on adapter up to 150 mm: h = 263 mm, up to 500 mm: h = 425 mm, > 500 mm: h = 775 mm
- 10) Not available with DVGW certificate. Correct sensor length: For pipe component DN 50 ... DN 80: h = 263 mm, for pipe component from DN 100 and weld-on adapter: h = 425 mm.
- 11) Not available with DVGW certificate. Please apply the correct sensor length.
- 12) Only for weld-on adapter without ball-valve. Only without certificates.

### 3.4 Additional ordering information for calibration

<b>FMT400-VTS, FMT400-VTCS</b>		
Gas component 1	Vol. %	(clear text)
Gas component 2	Vol. %	(clear text)
Gas component 3	Vol. %	(clear text)
Gas component 4	Vol. %	(clear text)
Gas component 5	Vol. %	(clear text)
Gas component 6	Vol. %	(clear text)
Gas component 7	Vol. %	(clear text)
Gas component 8	Vol. %	(clear text)
Gas component 9	Vol. %	(clear text)
Gas component 10	Vol. %	(clear text)
		Sum 100 %
Operating temperature		(clear text)
Operating pressure		(clear text)
Nominal diameter, Pipe inner diameter (mm)		(clear text)
Measuring range		(clear text)
Unit		(clear text)
Standard state (e.g. 0 °C, 1013 mbar)		(clear text)
Adjusted measuring range		(clear text)

## 4 Sensyflow FMT400-VTCS, hygienic version

### 4.1 Dimensions

Pipe fitting S according to DIN 11851

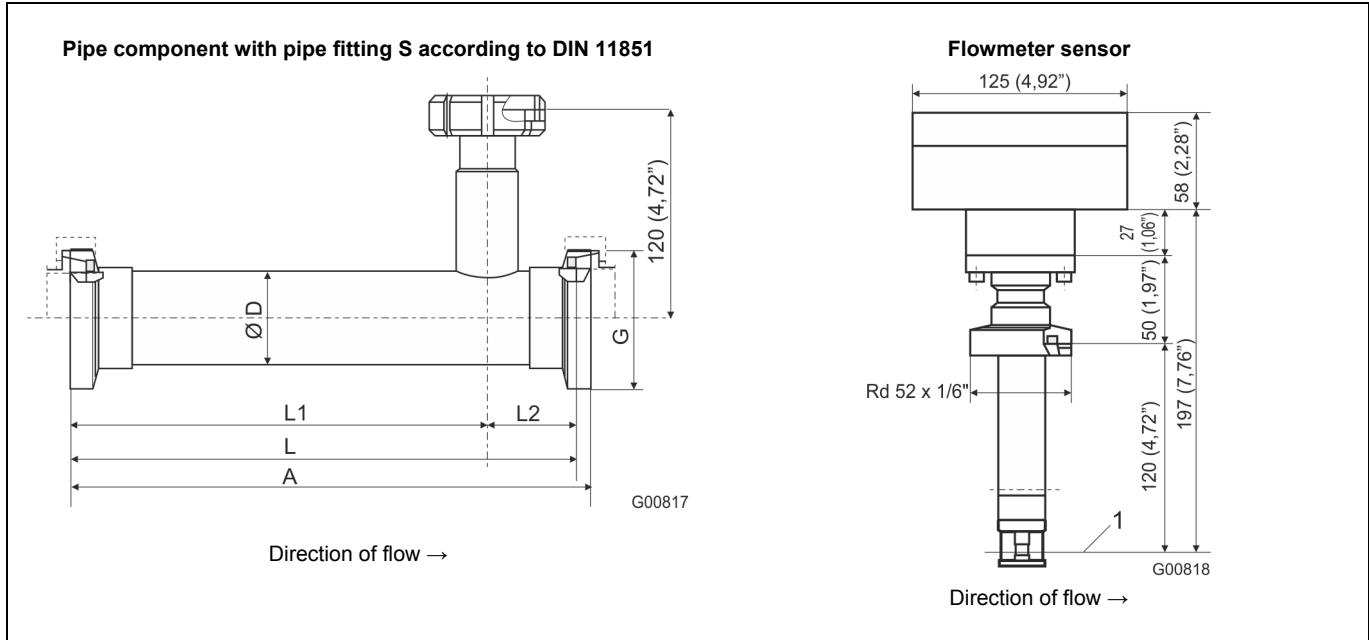


Fig. 8: Nominal pressure PN16 for DN 25, DN 40, DN50; PN10 for DN 80

1 Centre of pipe component

DN	A	L	L1	L2	Ø D	G
25 (1")	196 (7.72)	182 (7.17)	140 (5.51)	42 (1.65)	28 x 1 (1.10 x 0.04)	Rd52 x 1/6"
40 (1.5")	284 (11.18)	270 (10.63)	205 (8.07)	65 (2.56)	40 x 1 (1.57 x 0.04)	Rd62 x 1/6"
50 (2")	344 (13.54)	330 (12.99)	265 (10.43)	65 (2.56)	52 x 1 (2.04 x 0.04)	Rd78 x 1/6"
80 (3")	526 (20.71)	510 (20.08)	425 (16.73)	85 (3.35)	85 x 2 (3.35 x 0.08)	Rd110 x 1/4"

Dimensions in mm (inch)

**FG flange**

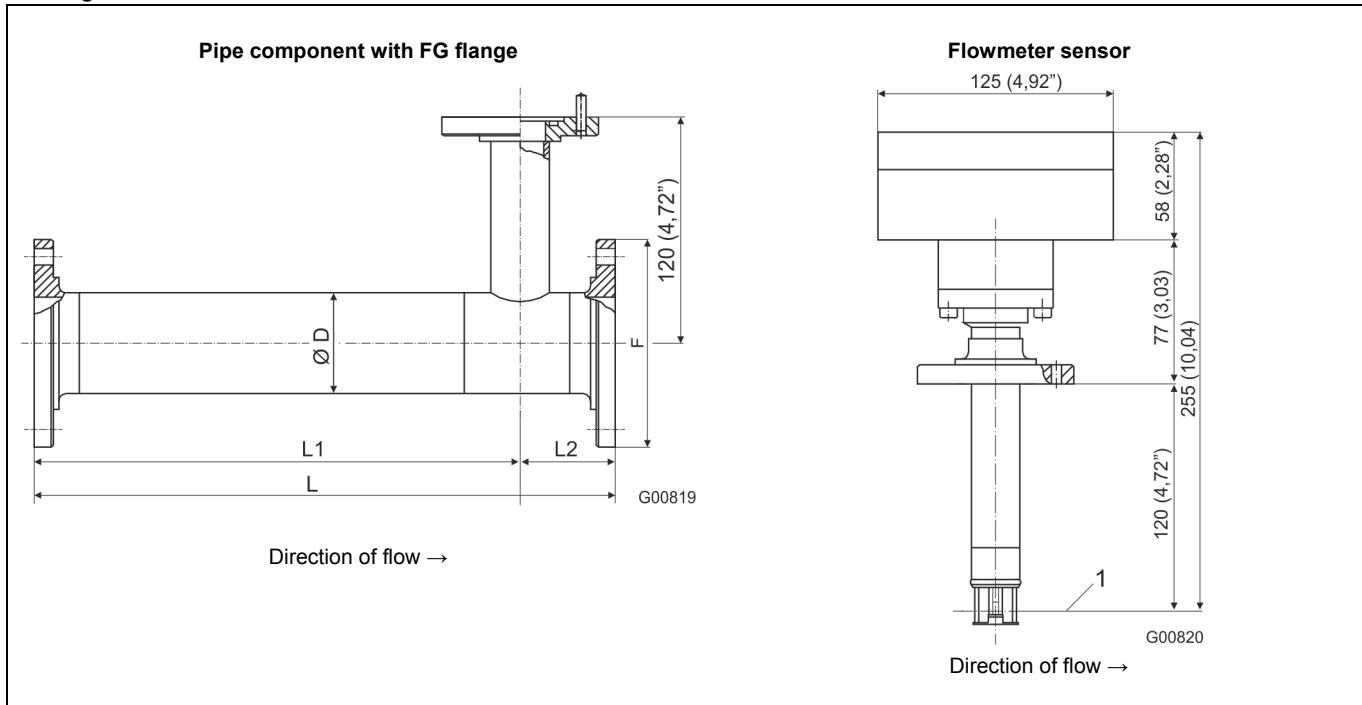


Fig. 9: FG1, PN10

1 Centre of pipe component

DN	L	L1	L2	Ø D	F
25 (1")	175 (6.89)	133 (5.24)	42 (1.65)	29 x 1.5 (1.14 x 0.06)	83 (3.27)
40 (1.5")	270 (10.63)	205 (8.07)	65 (2.56)	42 x 2 (1.65 x 0.08)	100 (3.94)
50 (2")	330 (12.99)	265 (10.43)	65 (2.56)	54 x 2 (2.12 x 0.08)	110 (4.33)

The FG flanges on the pipe component's process side are always smooth (without groove).

Dimensions in mm (inch)

#### 4.2 Measuring ranges at atmospheric pressure

Type of gas	Air, nitrogen, oxygen -25 ... 150 °C (-13 ... 302 °F)					
Nominal diameter	$q_{\min}$ kg/h	$q_{\max}$ kg/h	$q_{\min}$ Nm³/h for 0 °C (32 °F) / 1013.25 hPa (14.696 psia)	$q_{\max}$ Nm³/h	$q_{\min}$ lbs/h	$q_{\max}$ lbs/h
mm      inch						
DN 25    1	0    ...	160	0    ...	120	0    ...	350
DN 40    1.5	0    ...	430	0    ...	330	0    ...	950
DN 50    2	0    ...	700	0    ...	540	0    ...	1500
DN 80    3	0    ...	1700	0    ...	1300	0    ...	3700

Type of gas	Carbon dioxide -25 ... 150 °C (-13 ... 302 °F)					
Nominal diameter	$q_{\min}$ kg/h	$q_{\max}$ kg/h	$q_{\min}$ Nm³/h for 0 °C (32 °F) / 1013.25 hPa (14.696 psia)	$q_{\max}$ Nm³/h	$q_{\min}$ lbs/h	$q_{\max}$ lbs/h
mm      inch						
DN 25    1	0    ...	180	0    ...	90	0    ...	400
DN 40    1.5	0    ...	440	0    ...	220	0    ...	970
DN 50    2	0    ...	730	0    ...	370	0    ...	1600
DN 80    3	0    ...	1900	0    ...	900	0    ...	4200

#### 4.3 Ordering information

	Version number	1 - 6	7	8	9	10	11	12	13	14	15	Main order number	Add. order no.
<b>Sensyflow FMT400-VTCS Thermal Mass Flowmeter, hygienic version, for gases, integral mount design</b>	V14222		X	X	X	X	X	X	X	X	X		XXX
<b>Sensor Unit</b> Metal sensor, stainless steel			1)	1									
<b>Version</b> VTCS, Hygienic version, pipe screw connection S acc. DIN 11851, nominal pressure PN 16 (16 bar / 1.6 MPa / 232 psi)											6		
VTCS, Hygienic version, FG flange, nominal pressure PN 10 (10 bar / 1 MPa / 145 psi)											8		
<b>Operating Temperature</b> Standard range -25 ... 150 °C (-13 ... 302 °F), hygienic version									0				
<b>Measuring Medium</b> Gases, gas mixtures and natural gas (with max. 23.5 Vol% O2 each)									2)	0			
Oxygen / gas mixtures > 23.5 Vol% O2, oil and grease-free, with O2 certificate (max. 150 °C / 302 °F)									3)	1			
<b>Mounting Length / Material</b> 120 mm (4.8 in.) / Stainless steel									4	0			
<b>Analog Output</b> 4 ... 20 mA, alarm < 3.5 mA									4)	1			
4 ... 20 mA, alarm > 22 mA									4)	2			
0 ... 20 mA									4)	3			
<b>Number of Characteristic Curves</b> 1 characteristic curve											1		
<b>Certificates: Calibration</b> Factory certificate											0		
DAkkS certificate of calibration with air (not for process gas calibration)									5)	1			
<b>Certificates and Material Traceability</b> Material certificate 3.1 acc. EN 10204 Declaration of compliance with the order 2.1 acc. EN 10204												CBB	CF3
<b>Certificates: GOST</b> GOST Russia - metrological approval GOST Kazakhstan - metrological approval												CG1	CG2
<b>Adapter</b> LCI adapter												GL	
<b>Language of documentation</b> German English Russian Western Europe / Scandinavia language package (languages: DE, EN, DA, ES, FR, IT, NL, PT, FI, SV) Eastern Europe language package (languages: DE, EL, CS, ET, LV, LT, HU, PL, SK, SL, RO, BG)												M1 M5 MB MW ME	
<b>Accessories</b>												<b>Order number</b>	
FMT Power supply unit, housing for rail mounting 62.5 mm x 75 mm x 139 mm, input 230 V AC, output 24 V DC / 2.5 A												7962800	
FMT400-VTS / FMT400-VTCS Blind Cover Thread DN25 / 1 inch with seal, to close flowmeter sensor connection												3KXF003016U0200	
FMT400-VTS / FMT400-VTCS Blind Cover, threat DN 25 / 1 in., with seal, to close flowmeter sensor connection												3KXF421400L0001	
FMT400-VTS / FMT400-VTCS Commissioning Instruction, English												3KXF421002R4401	
FMT400-VTS / FMT400-VTCS Commissioning Instruction, German												3KXF421002R4403	
FMT400-VTS / FMT400-VTCS Commissioning Instruction, Language package Eastern Europe												3KXF421002R4494	
FMT400-VTS / FMT400-VTCS Commissioning Instruction, Language package Western Europe / Scandinavia												3KXF421002R4493	
FMT400-VTS / FMT400-VTCS Operating Instruction, Russian												3KXF421002R4222	

- 1) Only for FMT400-VTCS, Hygienic version.
- 2) Not for pure oxygen.
- 3) Not for flange FG.
- 4) Changeable via LCI adapter.
- 5) DAkkS- / ILAC-accredited calibration equipment D-K-15081-01-00

Main order number										Add. order no.
	Version number	1 - 6	7-9	10	11	12	13	14	15	
<b>FMT082 pipe component, for Sensyflow FMT400-VTCS</b>	<b>FMT082</b>	<b>XXX</b>	X	X	X	X	X	X	X	<b>XXX</b>
<b>Mounting Length of the Sensor</b> 120 mm (4.8 in.)				120						
<b>Measuring Medium</b> Gases, gas mixtures and natural gas (each max. 23.5 Vol% O <sub>2</sub> ) Oxygen / gas mixtures > 23.5 Vol% O <sub>2</sub> , oil and grease-free, with O <sub>2</sub> certificate (max. 150 °C / 302 °F)				A						
<b>Design</b> Pipe component for Sensyflow FMT400-VTCS				B						
<b>Nominal diameter</b> DN 25 (1 in.) DN 40 (1-1/2 in.) DN 50 (2 in.) DN 80 (3 in.)					0					
<b>Flange Style and Pressure Rating</b> Pipe screw connection S acc. DIN 11851, nominal pressure PN 16 (16 bar / 1.6 MPa / 232 psi) FG flange, nominal pressure PN 10 (10 bar / 1 MPa / 145 psi)						6				
<b>Process Connection for Flowmeter Sensor</b> Standard Sensyflow flange with centering pin						1)	8			A
<b>Material</b> Stainless steel AISI 304 (1.4301), only with pipe screw connection S / nominal pressure PN 16 Stainless steel AISI 316L (1.4404), only with FG flange / nominal pressure PN 10								4	5	
<b>Certificates and Material Traceability</b> Material certificate 3.1 acc. EN 10204 Declaration of compliance with the order 2.1 acc. EN 10204										CBB CF3

- 1) Not available with oxygen measurement

#### 4.4 Additional ordering information for calibration

<b>FMT400-VTS, FMT400-VTCS</b>	
Gas component 1	Vol. % (clear text)
Gas component 2	Vol. % (clear text)
Gas component 3	Vol. % (clear text)
Gas component 4	Vol. % (clear text)
Gas component 5	Vol. % (clear text)
Gas component 6	Vol. % (clear text)
Gas component 7	Vol. % (clear text)
Gas component 8	Vol. % (clear text)
Gas component 9	Vol. % (clear text)
Gas component 10	Vol. % (clear text)
	Sum 100 %
Operating temperature	(clear text)
Operating pressure	(clear text)
Nominal diameter, Pipe inner diameter (mm)	(clear text)
Measuring range	(clear text)
Unit	(clear text)
Standard state (e.g. 0 °C, 1013 mbar)	(clear text)
Adjusted measuring range	(clear text)

## 5 Electrical connections

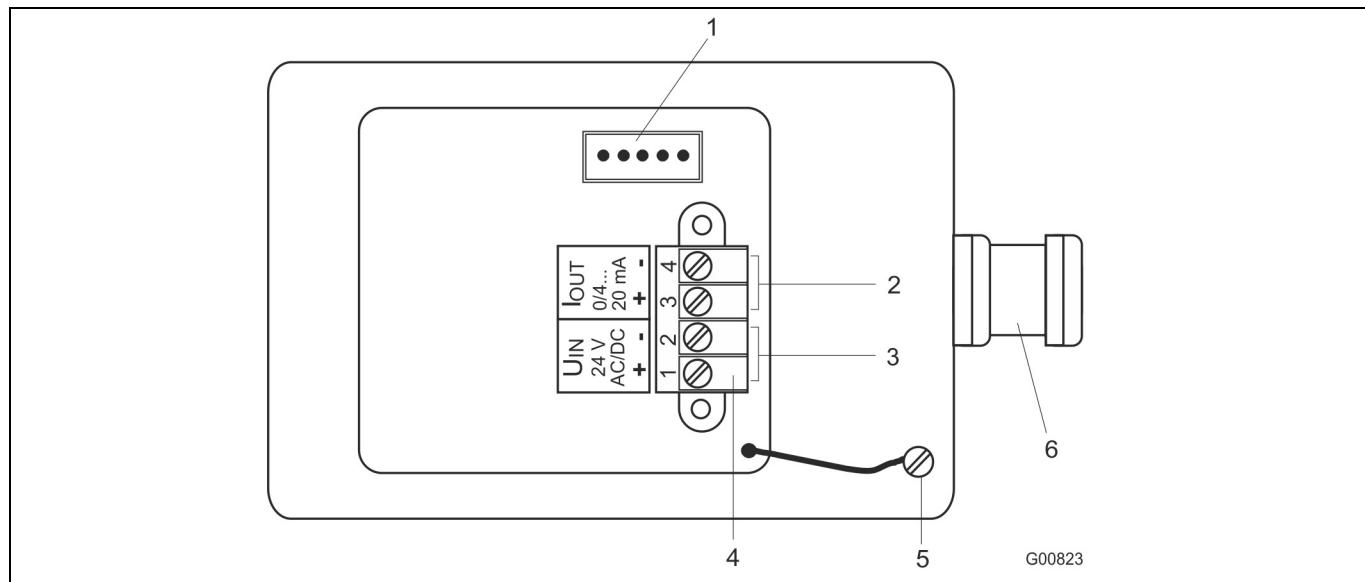
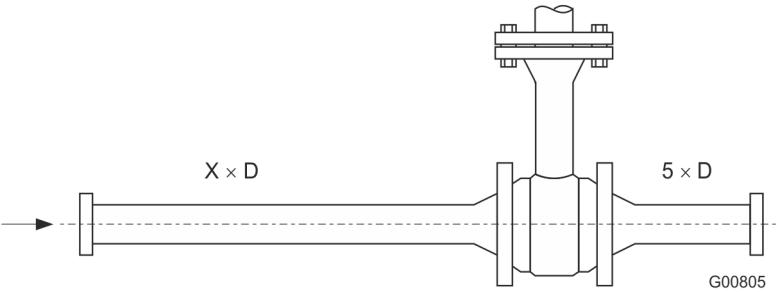
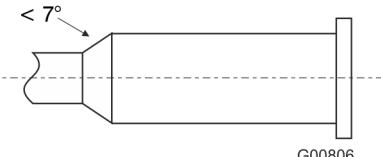
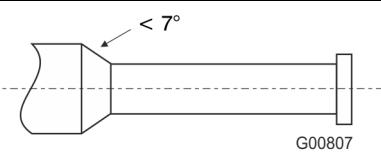
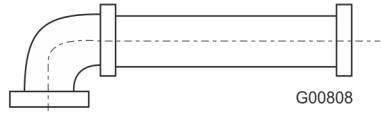
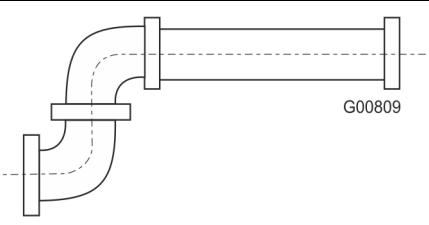
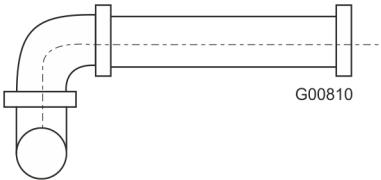
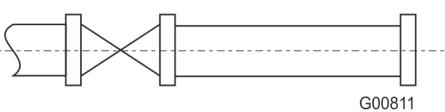


Fig. 10

- |   |   |   |             |
|---|---|---|-------------|
| 1 | Socket for LCI adapter                              | 4 | Terminals   |
| 2 | Analog output 0/4 ... 20 mA (electrically isolated) | 5 | Ground      |
| 3 | Power supply 24 V AC/DC                             | 6 | Cable entry |

## 6 Recommended steadyng lengths according to DIN EN ISO 5167-1

 <p>X × D      5 × D</p> <p>G00805</p>	
 <p>&lt; 7°</p> <p>G00806</p>	Expansion X = 15
 <p>&lt; 7°</p> <p>G00807</p>	Reducer X = 15
 <p>90° elbow</p> <p>G00808</p>	X = 20
 <p>Two 90° elbow in one level</p> <p>G00809</p>	X = 25
 <p>Two 90° elbow in two levels</p> <p>G00810</p>	X = 40
 <p>Valve / slide</p> <p>G00811</p>	X = 50

To achieve the stated measuring accuracy, the steadyng lengths seen above must be provided. For combinations of inlet run disturbances, e. g. valve and reducer, you must always consider the longer inlet run length. In confined spaces at the mounting location the outlet run length can be shortened to 3 × D. The reduction of the minimum inlet run length, however, will impact on the achievable accuracy.

High repeatability of the measuring value is still provided. Under certain circumstances, special calibration can be performed for insufficient steadyng lengths. For this purpose and in individual cases consulting is necessary.

For gases with extremely low density (hydrogen, helium) the steadyng lengths must be doubled.

## 7 Questionnaire



**Questionnaire**  
**Thermal Mass Flowmeter**  
**Sensyflow FMT**

**Customer address:** \_\_\_\_\_

Company: \_\_\_\_\_

Zip code and location: \_\_\_\_\_

Date: \_\_\_\_\_

Cust. no.: \_\_\_\_\_

Telephone: \_\_\_\_\_

Contact person: \_\_\_\_\_

E-mail: \_\_\_\_\_

**Media data for gaseous, pure media:**

*Description of media*

Mixed gas, gas composition in vol.%<sup>1)</sup>

Type of gas (no mixtures): \_\_\_\_\_

Component 1/name/vol.%: \_\_\_\_\_

Operating pressure (bar abs.)

Component 2/name/vol.%: \_\_\_\_\_

Min./norm./max., approx. \_\_\_\_\_

Component 3/name/vol.%: \_\_\_\_\_

Operating temperature (°C)

Component 4/name/vol.%: \_\_\_\_\_

Min./norm./max., approx. \_\_\_\_\_

Component 5/name/vol.%: \_\_\_\_\_

**Flowrate<sup>2)</sup>**

Min.: \_\_\_\_\_ Norm.: \_\_\_\_\_ Max.: \_\_\_\_\_

**Pipeline/pipe component<sup>3)</sup>**

**Flow unit:**

Standard volume

Mass flow units

Nm<sup>3</sup>/h

kg/h

DN/PN: \_\_\_\_\_

Nm<sup>3</sup>/min

kg/min

ANSI/lbs \_\_\_\_\_

NI/min

g/min

Diameter [mm] \_\_\_\_\_

SCFM

t/h

Inside diameter specified in mm

Other \_\_\_\_\_

Other \_\_\_\_\_

Wafer flange form 1

Partial meas. section form 2

Weld-on adapter

Other

<sup>2)</sup>Standard condition, e.g., 0°C/1,013 mbar or \_\_\_\_\_

**Required device designs:**

**Design:**

FMT500-IG

FMT700-P<sup>4)</sup>

Integral mount design

FMT400-VTS

FMT200-ECO2

Remote design with

FMT400-VTCS

FMT200-D

Cable length 5 m

**Output signal:**

**Ex protection class:**

0/4...20 mA

None

Zone 2/22  24 V

4...20 mA/HART

ATEX Zone 1/21

GOST  110 V

PROFIBUS DP-V1

ATEX Zone 0/21

FM/CSA  230 V

**Comments:**

1) Please specify the composition of mixed gases  
(e.g., North Sea natural gas: 1) CH<sub>4</sub> 90%, 2) C<sub>2</sub>H<sub>6</sub> 5%, 3) N<sub>2</sub> 3%, 4) C<sub>3</sub>H<sub>8</sub>, 1%, 5) CO<sub>2</sub> 1%).

2) Calibration is performed at the max. possible flow in the nominal size specified.

3) Please observe/determine the minimum inflow and outflow sections.

4) Output signal: 0...10 V as standard

**Note: An order can only be confirmed and a delivery date specified once full technical clearance has been obtained.**

---

**ABB Limited****Measurement & Analytics**

Howard Road, St. Neots  
Cambridgeshire, PE19 8EU  
UK

Tel: +44 (0)870 600 6122  
Fax: +44 (0)1480 213 339  
Email: [enquiries.mp.uk@gb.abb.com](mailto:enquiries.mp.uk@gb.abb.com)

**ABB Inc.****Measurement & Analytics**

125 E. County Line Road  
Warminster, PA 18974  
USA

Tel: +1 215 674 6000

Fax: +1 215 674 7183

**ABB Automation Products GmbH****Measurement & Analytics**

Schillerstr. 72  
32425 Minden  
Germany  
Tel: +49 571 830-0  
Fax: +49 571 830-1806

**[abb.com/flow](http://abb.com/flow)**

---

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.  
ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein.  
Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.