


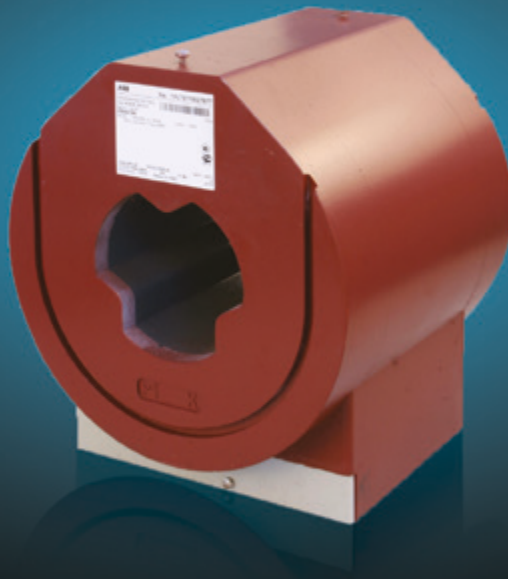

Medium Voltage Products

KOKS xx A xx

Bus current transformer

Technical parameters	Value
Highest voltage for equipment	12 / 17.5 kV
Rated power-frequency withstand voltage	28 / 38 kV
Rated lightning impulse withstand voltage	75 / 95 kV
Rated continuous thermal current	max. 4000 A
Rated short-time thermal current 1s	90 kA
Burdens, classes	5 -30 VA / 0.2 - 1 / 5P; 10P
Reconnectable	Secondary only

Description

The KOKS xx A xx current transformers are casted in epoxy resin and designed for insulation voltages up to 17.5 kV. The transformers are configured as bus-type, with one or more ratios (with a possibility of secondary reconnection) and perform a function of a bushing when installed in the switchboard.

The transformer is designed for 1 to 6 secondary windings and in dependence on the combination of parameters (accuracy class, burden, short-circuit current, overcurrent factor...) with possibility to choose from various sizes of the transformer.

The secondary windings are used for measurement or protection purposes. During the operation of transformer, one secondary connector of each used winding and one of short-circuited or unused has to be earthed. The secondary windings are lead out into casted-type secondary terminal board.

The transformer can be mounted in any position. The transformer position is fixed with four screws.

Selection of transformer

Rated primary voltages: 3.6 kV; 7.2 kV; 12 kV; 17.5 kV


Rated primary currents: 500; 600; 750; 1000; 1250; 1500; 2000; 2500; 3000; 3500; 4000 A. Primary currents may differ from the above and can also be agreed upon with customer.

Rated secondary currents: 5 A; 1 A (possibility to combine different values in one transformer).






Rated frequency: 50 Hz; 60 Hz.

The transformers are manufactured conformably to the following requirements and standards: IEC, VDE, ANSI, BS, GOST and CSN.

Basic marking

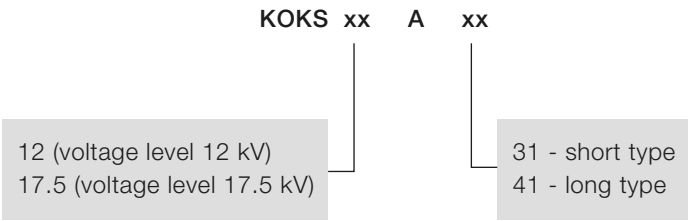

Marking of current transformer outlets - example

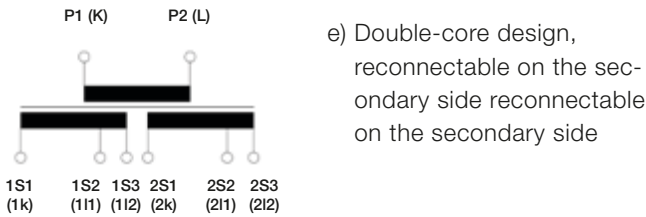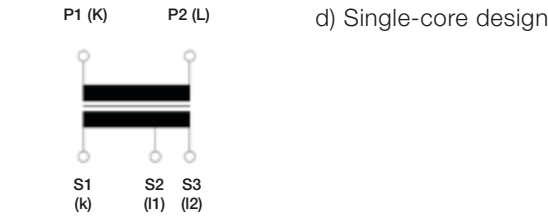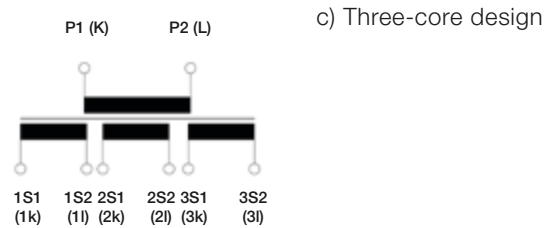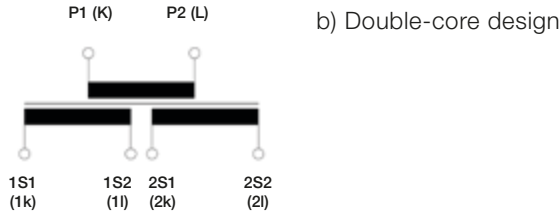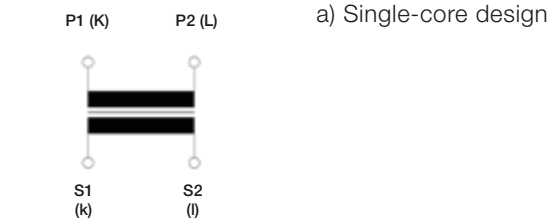

Standartized transformers


Type	Ratio	I_{thn}	Burden	Accuracy	FS/ALF
KOKS 12A31	500//5 A	50 kA	20 VA	0.5	5
KOKS 12A31	500//5/5 A	50 kA	15/15 VA	0.5/5P	10/10
KOKS 12A31	500//1/1 A	50 kA	15/20 VA	0.5/5P	5/10
KOKS 12A31	600//5/5 A	50 kA	15/15 VA	0.5/5P	5/10
KOKS 12A31	600//1/1 A	50 kA	15/10 VA	0.5/5P	5/10
KOKS 12A31	750//1/1 A	50 kA	10/15 VA	0.5/5P	10/20
KOKS 12A31	900//5/1 A	50 kA	15/15 VA	0.5/5P	5/10
KOKS 12A31	900//5/5 A	50 kA	10/20 VA	0.5/5P	10/10
KOKS 12A31	1000//1 A	50 kA	20 VA	0.5	5
KOKS 12A31	1000//5/5 A	50 kA	20/20 VA	0.5/5P	5/10
KOKS 12A31	1200//5/5 A	50 kA	15/20 VA	0.5/5P	10/10
KOKS 12A31	1200//1/1/5 A	50 kA	10/15/15 VA	0.5/5P/5P	10/10/10
KOKS 12A31	1250//1/1 A	50 kA	20/20 VA	0.5/5P	10/10
KOKS 12A41	1250//5/5 A	50 kA	20/30 VA	0.5/5P	10/20
KOKS 12A31	1500//5/5 A	50 kA	20/15 VA	0.5/5P	10/20
KOKS 12A31	1500//5/5 A	50 kA	20/20 VA	0.5/5P	5/10
KOKS 12A31	1500//1 A	50 kA	30 VA	0.5	5
KOKS 12A41	1500//5/5/1 A	50 kA	20/15/20 VA	0.5/5P/5P	10/20/10
KOKS 12A31	2000//5/5 A	50 kA	15/20 VA	0.5/5P	5/10
KOKS 12A31	2500//5/5 A	50 kA	20/20 VA	0.5/5P	5/20
KOKS 12A31	2500//1/1 A	50 kA	15/20 VA	0.5/5P	10/20
KOKS 12A31	2500//5/5 A	50 kA	20/20 VA	0.5/5P	5/20
KOKS 12A41	2500//5/5/5 A	50 kA	15/20/20 VA	0.5/5P/5P	5/10/20
KOKS 12A31	3000//5/5 A	50 kA	20/30 VA	0.5/5P	10/20
KOKS 12A31	3000//5/5/5 A	50 kA	10/15/15 VA	0.5/5P/5P	10/10/10
KOKS 12A31	3000//1/1 A	50 kA	15/20 VA	0.5/5P	10/10
KOKS 12A41	3000//5/5/1/1 A	50 kA	15/20/15/20 VA	0.5/5P/0.5/5P	10/10/10/20
KOKS 12A31	3150//1 A	50 kA	30 VA	5P	10
KOKS 12A31	3150//1/1 A	50 kA	20/20 VA	0.5/5P	5/10
KOKS 12A31	3150//1/1/1 A	50 kA	20/20/20 VA	0.5/5P/5P	5/10/10
KOKS 12A41	3150//1/1/1/1 A	50 kA	10/10/10/10/10 VA	0.5/0.5/5P/5P/5P	10/10/10/10/20
KOKS 12A31	3150//5/5 A	50 kA	20/20 VA	0.5/5P	5/10
KOKS 12A31	3150//5/5/5 A	50 kA	15/15/15 VA	0.5/5P/5P	10/10/20
KOKS 12A31	3150//5/5/5/5 A	50 kA	10/10/10/10 VA	0.5/0.5/5P/5P	10/10/10/10
KOKS 12A31	3600//1/1 A	50 kA	20/30 VA	0.5/5P	5/10
KOKS 12A31	3600//1/1/1 A	50 kA	20/20/20 VA	0.5/5P/5P	5/10/10
KOKS 12A31	3600//1/1/1 A	50 kA	10/10/15 VA	0.5/5P/5P	5/10/20
KOKS 12A41	3600//1/1/1/1 A	50 kA	10/10/15/10 VA	0.5/0.5/5P/5P	5/5/10/10
KOKS 12A31	3600//5/5 A	50 kA	20/20 VA	0.5/5P	5/10
KOKS 12A31	3600//5/5 A	50 kA	15/15/15 VA	0.5/5P/5P	5/10/10
KOKS 12A31	3600//5/5/5 A	50 kA	15/10/15 VA	0.5/5P/5P	5/10/20
KOKS 12A31	4000//1/1 A	50 kA	20/20 VA	0.5/5P	5/10
KOKS 12A31	4000//1/1/1 A	50 kA	15/15/15 VA	0.5/5P/5P	5/10/10
KOKS 12A41	4000//1/1/1/1 A	50 kA	20/20/20/20 VA	0.5/0.5/5P/5P	5/5/10/10
KOKS 12A31	4000//5/5 A	50 kA	20/20 VA	0.5/5P	5/10
KOKS 12A31	4000//5/5/5 A	50 kA	10/10/15 VA	0.5/5P/5P	5/10/10
KOKS 12A31	4000//5/5/5 A	50 kA	10/10/10 VA	0.5/5P/5P	5/10/20
KOKS 12A41	4000//5/5/5/5 A	50 kA	15/15/15/15 VA	0.5/0.5/5P/5P	5/5/10/10

Dimensional Drawings

KOKS xx A xx

KOKS 12 A 31
KOKS 17.5 A 31

Weight: 35 kg

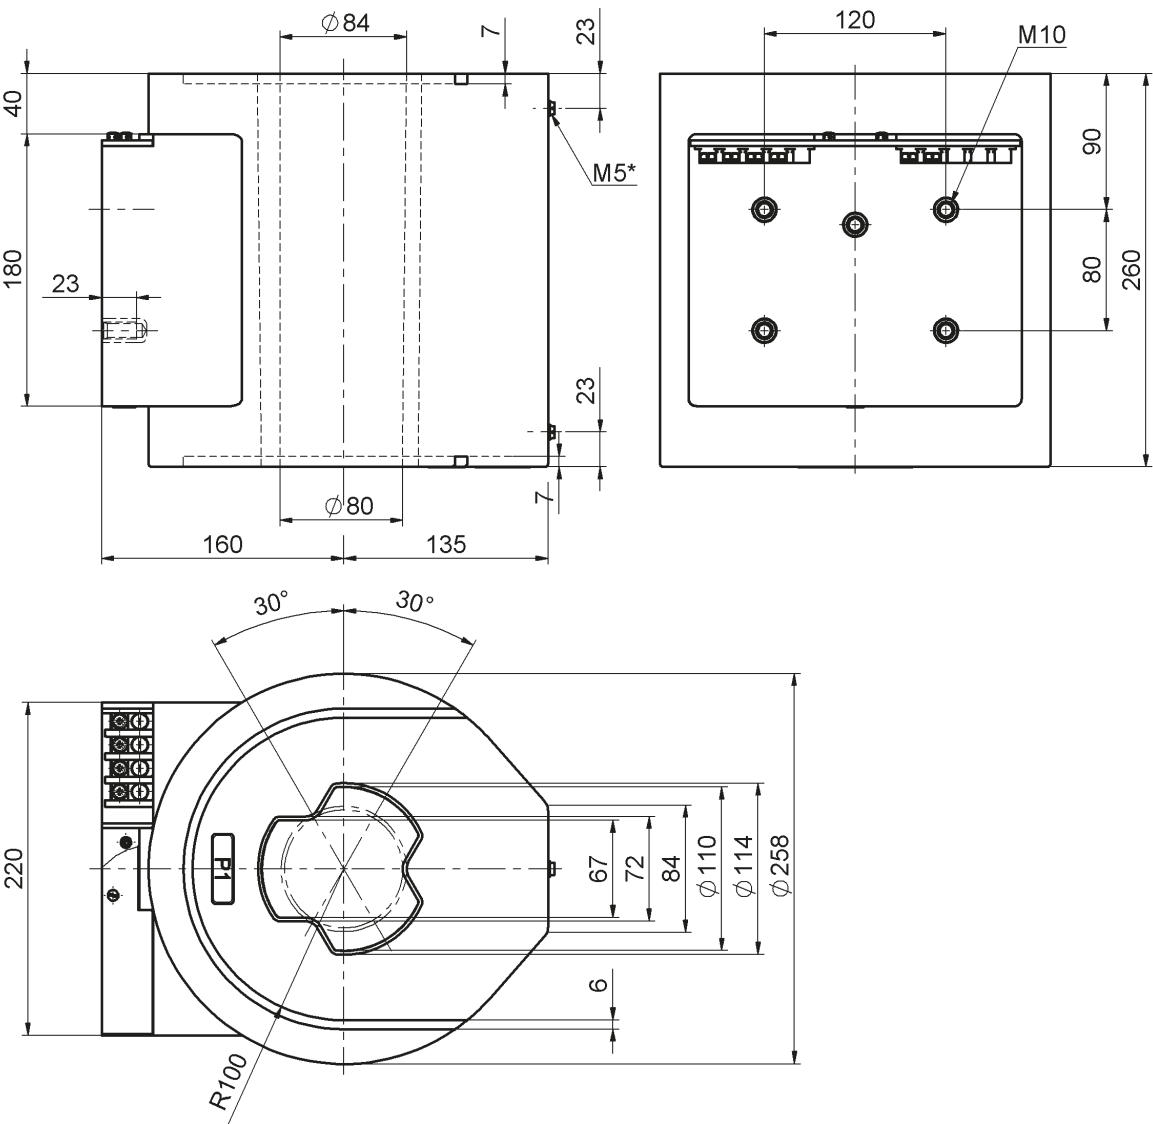


* MARKED M5 TERMINAL MUST BE CONNECTED TO THE PRIMARY BAR

Drawing n.	Polarity
44402520	P1 to secondary terminal
44402530	P2 to secondary terminal

KOKS 12 A 41
KOKS 17.5 A 41

Weight: 42 kg

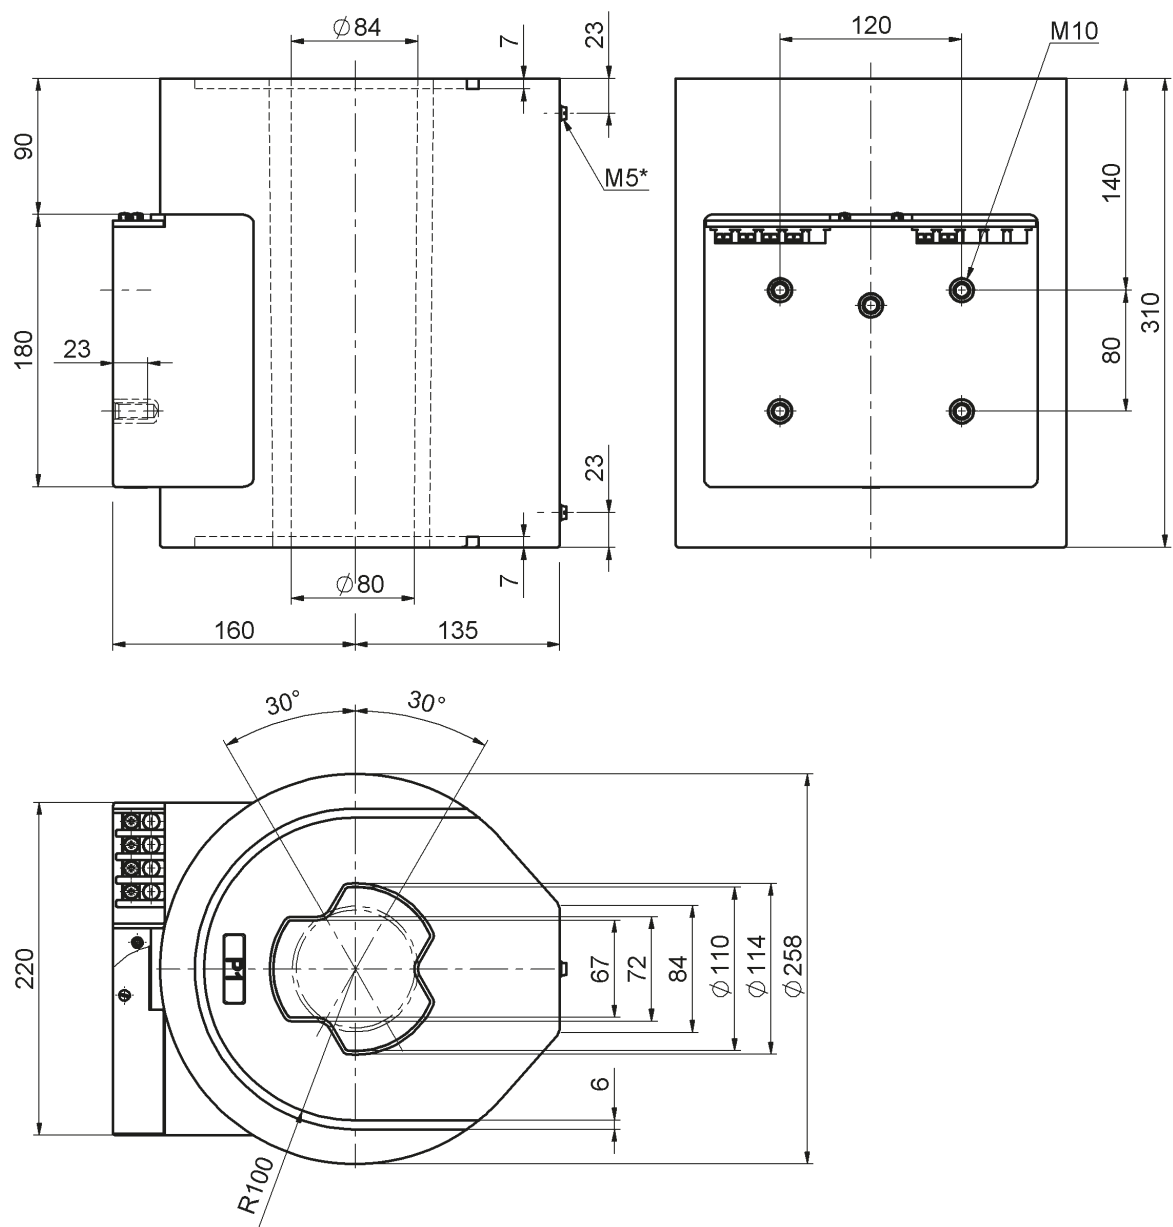

* MARKED M5 TERMINAL MUST BE CONNECTED TO THE PRIMARY BAR

Drawing n.	Polarity
44402540	P1 to secondary terminal
44402550	P2 to secondary terminal

Contact us

ABB s.r.o. PPMV Brno

Videnska 117, 619 00 Brno,
Czech Republic
Tel.: +420 547 152 021
+420 547 152 614
Fax: +420 547 152 626
E-mail: info.ejf@cz.abb.com

www.abb.com

The data and illustrations are not binding. We reserve the right to make changes without notice in the course of technical development of the product.

© Copyright 2015 ABB.
All rights reserved.

1VLC000515 Rev.2, en 2015.01.14