



# 5SDD 71X0400

Old part no. DS 808X-7110-04

## Welding diode

### Properties

- High forward current capability
- Low forward and reverse recovery losses
- High operational reliability

### Applications

- Welding equipment
- High current application up to 2000 Hz

### Key parameters

$V_{RRM}$	=	400	V
$I_{FAVm}$	=	7 110	A
$I_{FSM}$	=	55 000	A
$V_{TO}$	=	0.740	V
$r_T$	=	0.026	mΩ

### Types

type	$V_{RRM}$
5SDD 71X0400	400 V
Conditions:	$T_j = -40 \div 170^\circ\text{C}$ , half sine waveform, $f = 50\text{ Hz}$

### Mechanical data

$F_m$	Mounting force	$22 \pm 2\text{ kN}$
$m$	Weight	0.14 kg
$D_s$	Surface creepage distance	4 mm
$D_a$	Air strike distance	4 mm

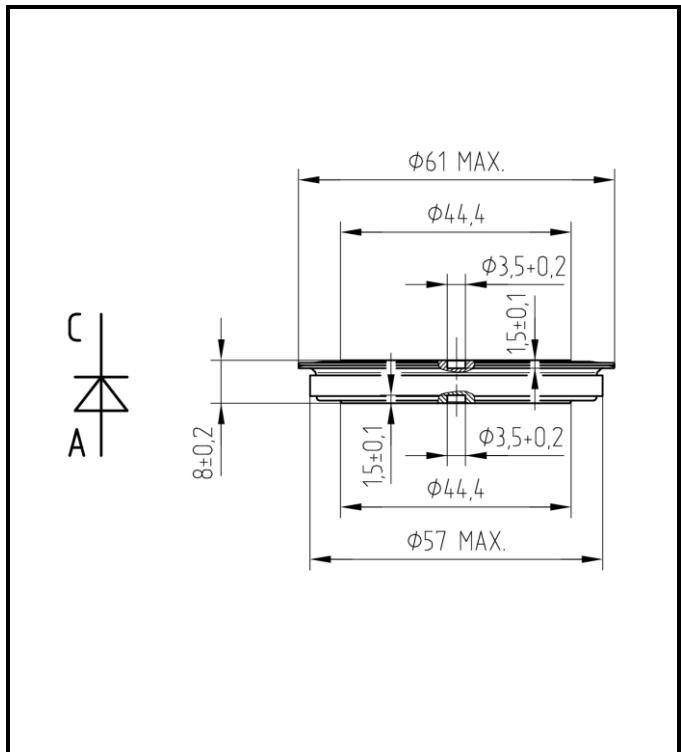


Fig. 1 Case



ABB s.r.o.

Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic  
tel.: +420 261 306 250, <http://www.abb.com/semiconductors>

<b>Maximum Ratings</b>		<b>Maximum Limits</b>	<b>Unit</b>
$V_{RRM}$	<b>Repetitive peak reverse voltage</b> $T_j = -40 \div 170^\circ\text{C}$	400	V
$I_{FAVm}$	<b>Average forward current</b> $T_c = 85^\circ\text{C}$	7 110	A
$I_{FRMS}$	<b>RMS forward current</b> $T_c = 85^\circ\text{C}$	11 200	A
$I_R$	<b>Repetitive reverse current</b> $V_R = V_{RRM}$	50	mA
$I_{FSM}$	<b>Nonrepetitive peak surge current</b> $t_p = 10 \text{ ms}, V_R = 0 \text{ V, half sine pulse}$	55 000	A
$\int I t$	<b>Limiting load integral</b> $t_p = 10 \text{ ms}, V_R = 0 \text{ V, half sine pulse}$	15 125 000	A <sup>2</sup> s
$T_{jmin} - T_{jmax}$	<b>Operating temperature range</b>	- 40 $\div$ 170	°C
$T_{stgmin} - T_{stgmax}$	<b>Storage temperature range</b>	- 40 $\div$ 170	°C

Unless otherwise specified  $T_j = 170^\circ\text{C}$

<b>Characteristics</b>		<b>Value</b>			<b>Unit</b>
		<b>min</b>	<b>typ</b>	<b>max</b>	
$V_{TO}$	<b>Threshold voltage</b>			0.740	V
	<b>Forward slope resistance</b> $I_{F1} = 5\,000 \text{ A}, I_{F2} = 15\,000 \text{ A}$			0.026	mΩ
$V_{FM}$	<b>Maximum forward voltage</b>	$I_{FM} = 5\,000 \text{ A}, T_j = 25^\circ\text{C}$	0.95	1.00	V
		$I_{FM} = 5\,000 \text{ A}$		0.87	
$Q_{rr}$	<b>Recovered charge</b> $I_{FM} = 1000 \text{ A}, di/dt = -30 \text{ A}/\mu\text{s}, V_R = 50 \text{ V}$		300		μC

Unless otherwise specified  $T_j = 170^\circ\text{C}$

<b>Thermal Specifications</b>		<b>Value</b>	<b>Unit</b>	
$R_{thjc}$	<b>Thermal resistance junction to case</b>	<i>double side cooling</i>	10	K/kW
		<i>single side cooling</i>	20	K/kW
$R_{thch}$	<b>Thermal resistance case to heatsink</b>	<i>double side cooling</i>	5	K/kW
		<i>single side cooling</i>	10	K/kW

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

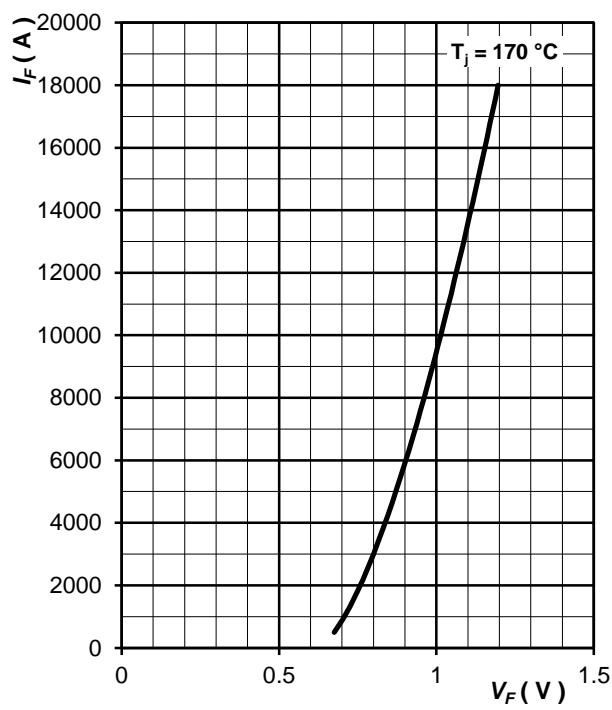
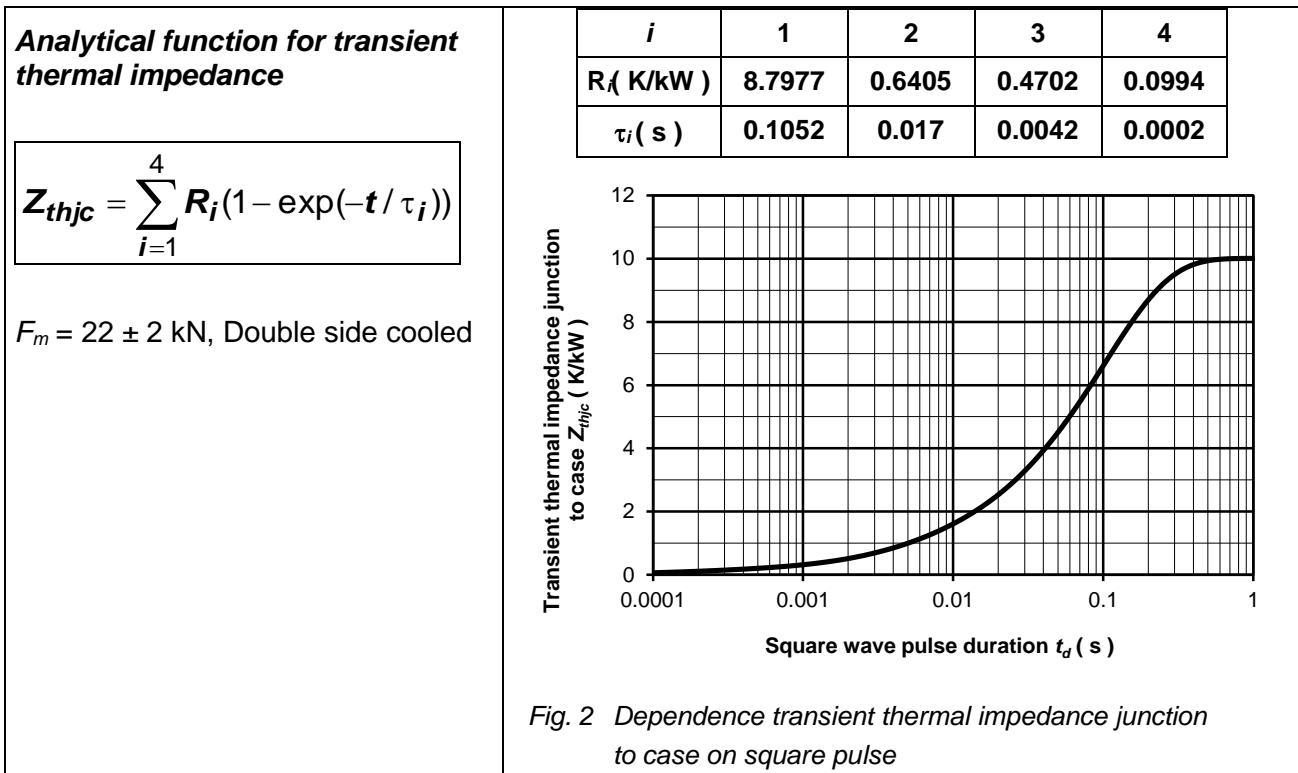


Fig. 3 Maximum forward voltage drop characteristics

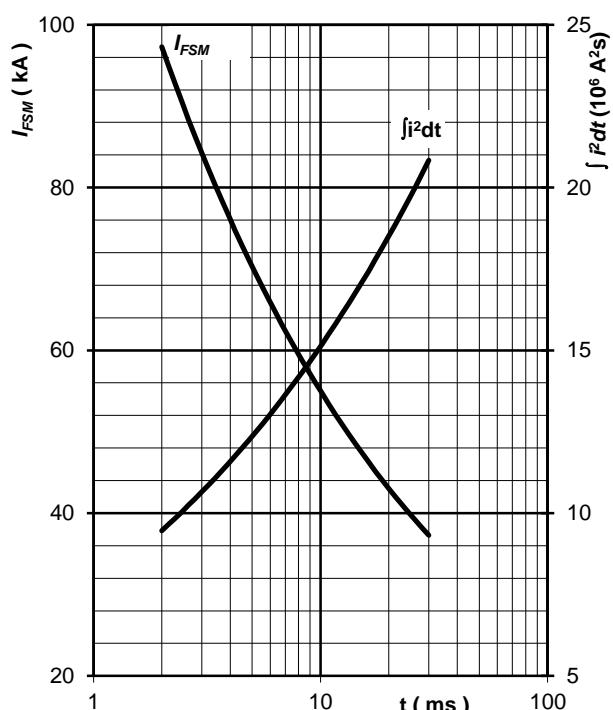


Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse,  
 $V_R = 0$  V,  $T_j = T_{jmax}$

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

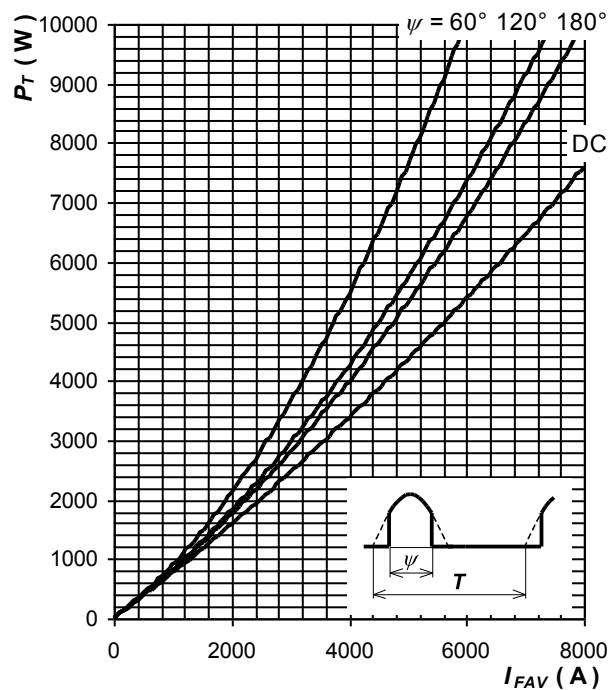


Fig. 5 Forward power loss vs. average forward current, sine waveform,  $f = 50$  Hz

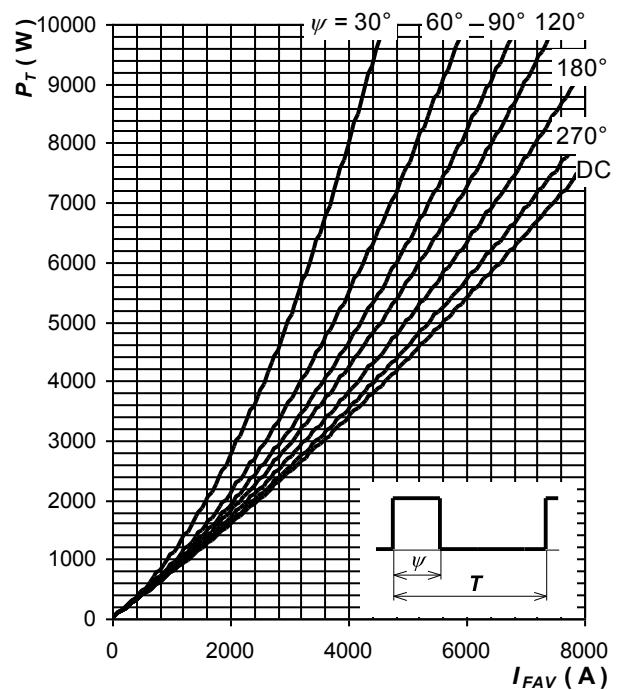


Fig. 6 Forward power loss vs. average forward current, square waveform,  $f = 50$  Hz

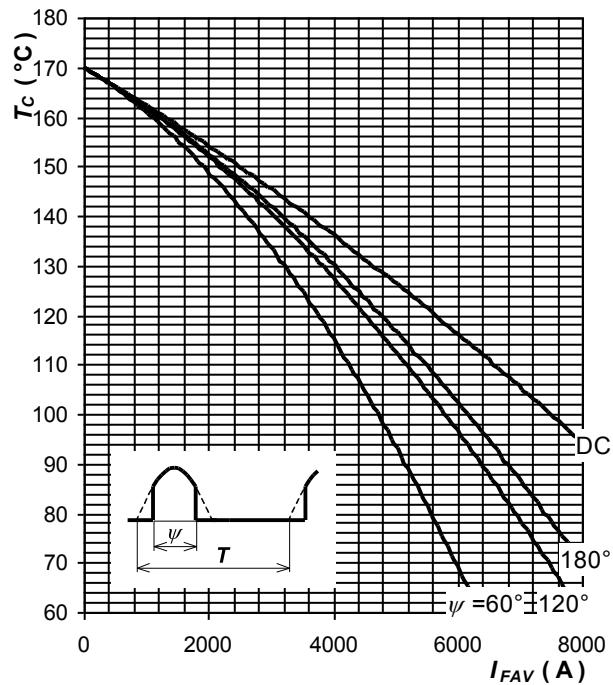


Fig. 7 Max. case temperature vs. aver. forward current, sine waveform,  $f = 50$  Hz

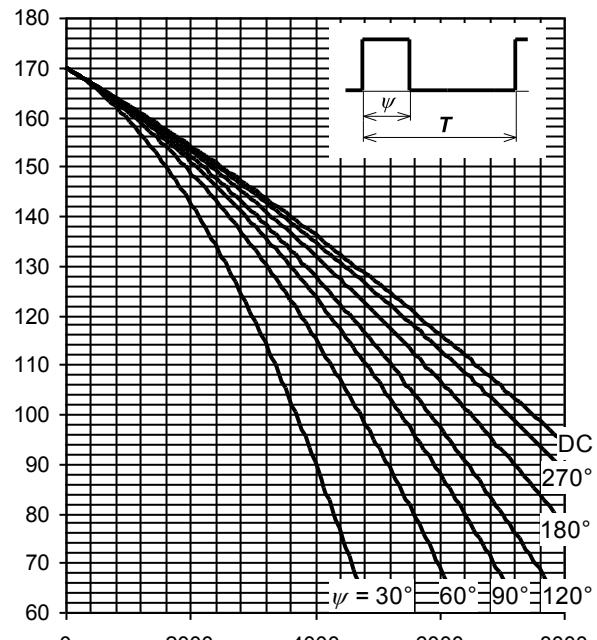
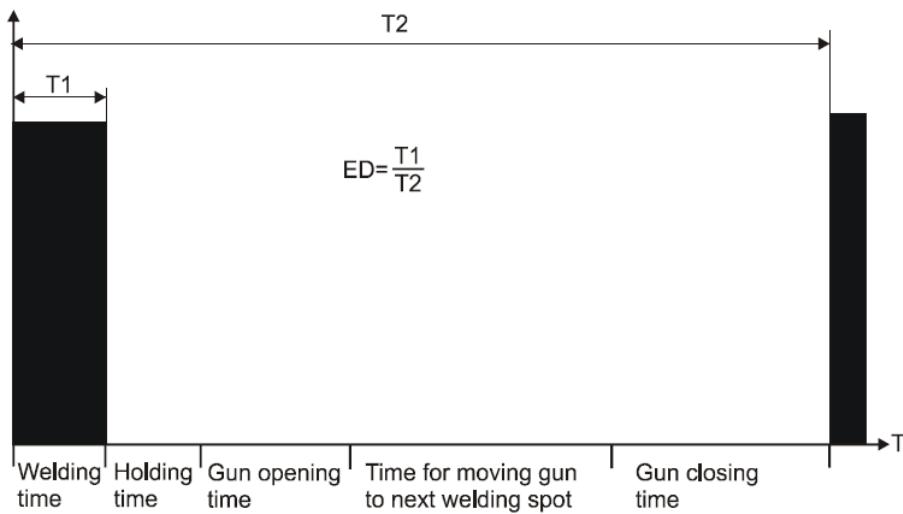
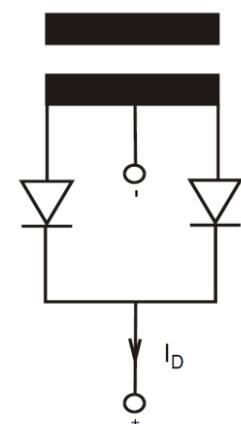
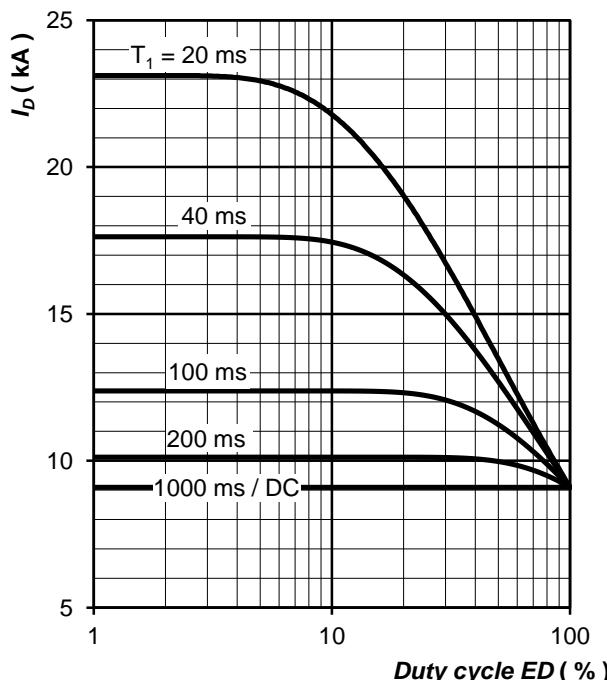
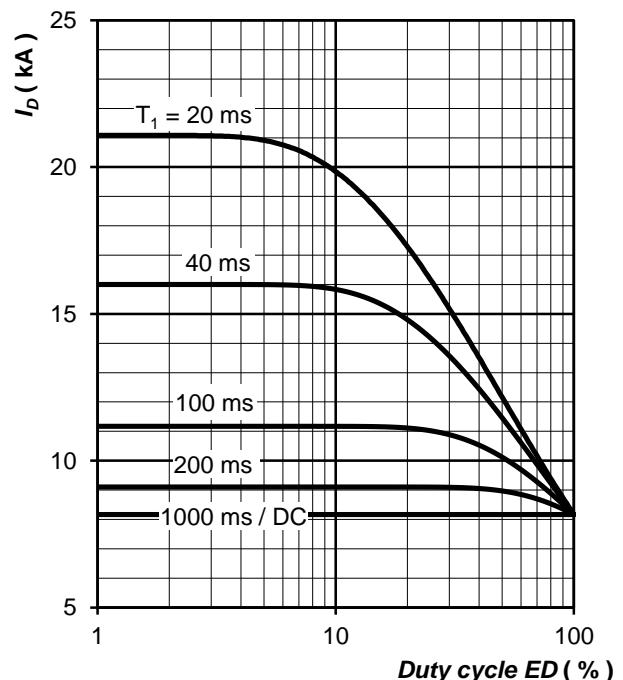


Fig. 8 Max. case temperature vs. aver. forward current, square waveform,  $f = 50$  Hz

ABB s.r.o., Novodvorská 1768/138a, 142 21 Praha 4, Czech Republic

Fig. 9 Definition of  $ED$  for typical welding sequenceFig. 10 Definition of  $I_D$  for single-phase centre tapFig. 11 Current load capacity, cont.,  
DC output welding current with single-phase  
centre tap vs. duty cycle  
 $f = 1000$  Hz, square wave,  $\Delta T_j = 80$  °CFig. 12 Current load capacity, cont.,  
DC output welding current with single-phase  
centre tap vs. duty cycle  
 $f = 1000$  Hz, square wave,  $\Delta T_j = 70$  °C

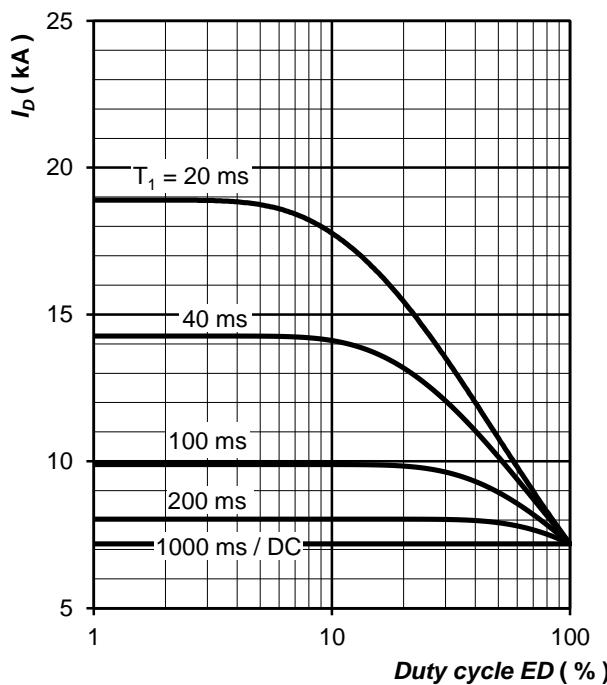


Fig. 13 Current load capacity, cont.,  
DC output welding current with single-phase  
centre tap vs. duty cycle  
 $f = 1000\text{ Hz}$ , square wave,  $\Delta T_j = 60\text{ }^\circ\text{C}$

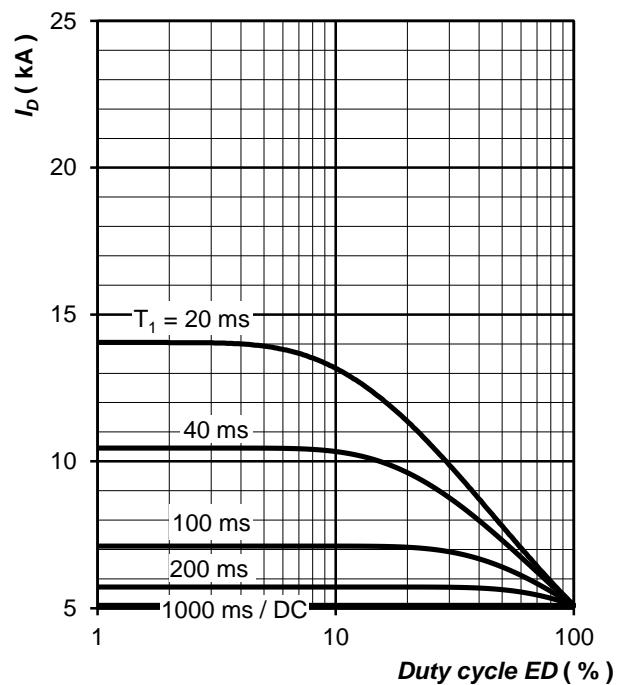


Fig. 14 Current load capacity, cont.,  
DC output welding current with single-phase  
centre tap vs. duty cycle  
 $f = 1000\text{ Hz}$ , square wave,  $\Delta T_j = 40\text{ }^\circ\text{C}$

Notes: