Ratings, types and voltages

Current ratings, dimensions and weights

| Unit | 2-Q | 4-Q rated Current DCS880-S02 I _{DC} [A] | Supply voltage [V _{AC}] | | | | | | | Internal | Weight | Dimensio | |
|------|------|---|-----------------------------------|---------|-----|-----|-----|-----|------|-------------------------|--------|------------------|-----------------------|
| size | | | | | | | | | | field current [A] | [kg] | hxwxd [mm] | h x w x d [inch] |
| | | | 400 | 500/525 | 600 | 690 | 800 | 990 | 1190 | | | | |
| | | | | | | | | | | | | | |
| H1 | 20 | 25 | ٠ | • | | | | | | 6 | 11 | 370 x 270 x 215 | 14.56 x 10.63 x 8.46 |
| | 45 | 50 | ٠ | • | | | | | | 12 | | | |
| | 65 | 75 | ٠ | • | | | | | | 12 | | | |
| | 90 | 100 | ٠ | • | | | | | | 12 | | | |
| H2 | 135 | 150 | ٠ | • | | | | | | 18 | 16 | 370 x 270 x 271 | 14.56 x 10.63 x 10.67 |
| | 180 | 200 | ٠ | • | | | | | | 18 | | | |
| | 225 | 250 | ٠ | • | | | | | | 18 | | | |
| | 270 | 300 | ٠ | • | | | | | | 18 | | | |
| H3 | 290 | 320 | | | ٠ | | | | | - | 25 | 460 x 270 x 317 | 18.11 x 10.63 x 12.48 |
| | 315 | 350 | ٠ | • | | | | | | 25 | | | |
| | 405 | 450 | ٠ | • | | | | | | 25 | | | |
| | 470 | 520 | ٠ | • | | | | | | 25 | | | |
| H4 | 590 | 650 | | | ٠ | | | | | - | 38 | 645 x 270 x 352 | 25.39 x 10.63 x 13.86 |
| | 610 | 680 | ٠ | • | | | | | | 30 | | | |
| | 740 | 820 | ٠ | • | | | | | | 30 | | | |
| | 900 | 1000 | ٠ | • | | | | | | 30 | | | |
| H5 | 1190 | 1190 | ٠ | • | | | | | | 25 ① | 55 | 750 x 270 x 372 | 29.53 x 10.63 x 14.65 |
| H6 | 900 | 900 | | | • | • | | | | 25 ① | 110 | 944 x 510 x 410 | 37.17 x 20.08 x 16.14 |
| | 1200 | 1200 | ٠ | • | | | | | | 25 ① | | | |
| | 1500 | 1500 | ٠ | • | ٠ | ٠ | | | | 25 ① | | | |
| | 2000 | | ٠ | • | • | ٠ | | | | 25 ① | | | |
| | | 2000 | ٠ | • | | | | | | 25 ① | | | |
| H7 | 1900 | 1900 | | | | | • | | | - | 180 | 1750 x 460 x 410 | 68.90 x 18.11 x 16.14 |
| | 2050 | 2050 | | • | ٠ | ٠ | | | | - | | | |
| | 2500 | 2500 | ٠ | • | • | ٠ | ٠ | | | - | | | |
| | 3000 | 3000 | ٠ | • | • | • | • | | | - | | | |
| H8 | 2050 | 2050 | | | | | | ٠ | | - | 315 | 1750 x 760 x 570 | 68.90 x 29.92 x 22.44 |
| | 2600 | 2600 | | | | | | ٠ | • | - | | | |
| | 3300 | 3300 | ٠ | • | • | • | • | ٠ | • | - | | | |
| | 4000 | 4000 | ٠ | • | • | • | • | • | • | - | | | |
| | 4800 | 4800 | | | • | • | • | | | - | | | |
| | 5200 | 5200 | | • | | | | | | - | | | |


① FEX-425 Int option



ABB Automation Products GmbH Motors and Drives Wallstadter Straße 59 68526 Ladenburg, Germany

© Copyright 2019 ABB. All rights reserved. Specifications subject to change without notice.



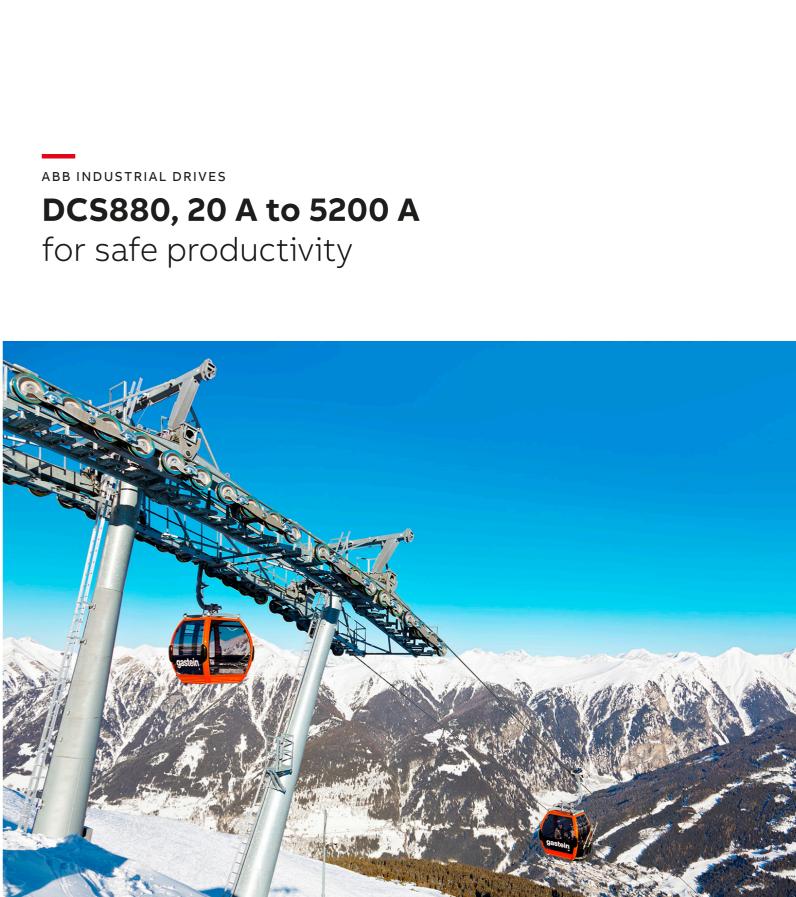



Creating a safer environment without compromising productivity

DC drives

The all-compatible drives are designed to provide customers across industries and applications with unprecedented levels of compatibility and flexibility.

Our DCS880 industrial drives are customized to meet the precise needs of industries such as oil and gas, mining, metals, cement, non motoric, material handling, pulp and paper, rubber and plastics, marine, water and wastewater, food and beverage and automotive. They control a wide range of applications such as cranes, extruders, winches, winders, conveyors, mixers, millstands, centrifuges, test benches, elevators, electrolysis, kiln.

Safety DCS880 offers safe torque off (STO) built in as a standard. It can be used in safety functions up to SIL3 / PLe enabling you to achieve every safety requirement.

111

Drive application

programming Customizable to meet the precise application needs based on IEC 61131-3. Uses the same programming environment and is also easy to integrate with other ABB components such as PLCs and HMIs.





ABB's motor control technology provides

precise speed and torgue control for all

DC motor control

applications.

Adaptive programming is ideal for creating simple control programs for various applications. It does not require expertise in programming and is offered as a standard in all-compatible drives.

Removable memory unit

Stores all the software and parameter configurations in an easily replaceable and simple-to-install module.

All typical DC configurations

DCS880 standard firmware supports all standard configurations present in DC drive applications such as 6-pulse, 12-pulse parallel, serial and serial sequential, 24-pulse, M3, M6 and field reversal.





makes worldwide access easy for industry applications.

Drive-to-drive link

Allows fast communication between drives including master-follower configurations as standard.



















Drives going

mobile We offer several smartphone applications to ease and enhance the use of ABB drives. These tools provide a userfriendly and easy-to-use approach for the commissioning, servicing and use of ABB drives.



Intuitive human-machine

interface User-friendly, high-contrast and high-resolution display enabling easy navigation in multiple languages. Allows USB and Bluetooth connection.

Startup and maintenance tool Drive composer PC tool for drive startup, configuration and daily use and process tuning. PC tool is connected to the drive via Ethernet or USB interface.



Communication with all major

automation networks Fieldbus adapters enable connectivity with all major automation networks.

Flexible product configurations Drives are built to order with a wide range of options. Ready made cabinets with or without transformer are available up to 20 MW.

Extended connectivity In addition to the standard interfaces, the drive has three built-in slots for additional input/output extension modules and speed feedback interfaces.