
ABB INDUSTRIAL DRIVES

DCS880 drives

20 A to 5200 A

Recycling instructions and environmental
information

LIST OF RELATED MANUALS

Drive hardware manuals and guides	Code (English)
DCS880 Recycling instructions and environmental information	3ADW000494
DCS880 Hardware manual	3ADW000462

You can find manuals and other product documents in PDF format on the Internet. See section Document library on the Internet on the inside of the back cover. For manuals not available in the Document library, contact your local ABB representative.

NOTICE

This document contains information about one or more ABB products and may include a description of or a reference to one or more standards that may be generally relevant to the ABB products. The presence of any such description of a standard or reference to a standard is not a representation that all of the ABB products referenced in this document support all of the features of the described or referenced standard. In order to determine the specific features supported by a particular ABB product, the reader should consult the product specifications for the particular ABB product.

ABB may have one or more patents or pending patent applications protecting the intellectual property in the ABB products described in this document.

The information in this document is subject to change without notice and should not be construed as a commitment by ABB. ABB assumes no responsibility for any errors that may appear in this document.

Products described or referenced in this document are designed to be connected and to communicate information and data through network interfaces, which should be connected to a secure network. It is the sole responsibility of the system/product owner to provide and continuously ensure a secure connection between the product and the system network and/or any other networks that may be connected.

The system/product owners must establish and maintain appropriate measures, including, but not limited to, the installation of firewalls, application of authentication measures, encryption of data, installation of antivirus programs, and so on, to protect these products, the network, its system, and interfaces against security breaches, unauthorized access, interference, intrusion, leakage, and/or theft of data or information.

ABB performs functionality testing on the products and updates that we release. However, system/product owners are ultimately responsible for ensuring that any product updates or other major system updates (to include but not limited to code changes, configuration file changes, third-party software updates or patches, hardware change out, and so on) are compatible with the security measures implemented. The system/product owners must verify that the system and associated products function as expected in the environment in which they are deployed.

In no event shall ABB be liable for direct, indirect, special, incidental or consequential damages of any nature or kind arising from the use of this document, nor shall ABB be liable for incidental or consequential damages arising from use of any software or hardware described in this document.

This document and parts thereof must not be reproduced or copied without written permission from ABB, and the contents thereof must not be imparted to a third party nor used for any unauthorized purpose.

The software or hardware described in this document is furnished under a license and may be used, copied, or disclosed only in accordance with the terms of such license. This product meets the requirements specified in EMC Directive 2014/30/EU and in Low Voltage Directive 2014/35/EU.

TRADEMARKS

DCS880 is a registered trademark of ABB Automation Products GmbH

All rights to copyrights, registered trademarks, and trademarks reside with their respective owners.

Copyright © 2017 ABB.

All rights reserved.

Release: Juli 2017

Document number: 3ADW000494R0201

TABLE OF CONTENTS

1. INTRODUCTION TO THE MANUAL	5
1.1 What this chapter contains	5
1.2 Applicability	5
1.3 Target audience	5
1.4 Contents of the manual	5
1.5 Frame size	5
1.6 Disclaimer	5
2. PRODUCT MATERIALS	6
2.1 Contents of this chapter	6
2.2 Materials for frames H1 to H5	6
2.3 Materials for frame H6	7
2.4 Materials for frame H7	9
2.5 Materials for frame H8	11
2.6 Materials for external Electronic – standard	13
2.7 Materials for external Electronic – swing frame	14
2.8 Materials of the control unit	15
2.9 Materials of the control panel	16
2.10 Package	16
2.11 Product manuals and sales brochures	16
3. MANUFACTURING AND USE	17
3.1 Manufacturing	17
3.2 Use	17
4. PRODUCT DISPOSAL	18
4.1 Contents of this chapter	18
4.2 Disposal	18
4.3 Dismantling	18
4.3.1 Manual dismantling	18
4.3.2 Mechanical shredding	18
4.4 ABB list of prohibited and restricted substances	18
4.4.1 Reference list	19
4.5 Recycling information in accordance with the WEEE	19
5. FURTHER INFORMATION	21
5.1 Product and service inquiries	21
5.2 Product training	21
5.3 Providing feedback on ABB Drives manuals	21
5.4 Document library on the Internet	21
5.5 ABB environment policy	21
5.6 ABB group sustainability objectives	21
6. ABB LIST OF PROHIBITED AND RESTRICTED SUBSTANCES	22
7. ABB AUTOMATION PRODUCTS	23

1. INTRODUCTION TO THE MANUAL

1.1 What this chapter contains

This chapter describes the contents of the manual. It also contains information on the compatibility and intended audience.

1.2 Applicability

This document covers the environmental information of the following products: DCS880 drives with option modules.

1.3 Target audience

This document is intended for ABB customers and for professional recyclers.

1.4 Contents of the manual

The document contains information for treatment facilities in accordance with the EU directive on waste electrical and electronic equipment (WEEE).

This manual contains the following chapters:

- Product materials
- Manufacturing and use
- Product disposal

The WEEE directive is implemented through national regulations and therefore requirements vary in each EU member state.

Drives are always parts of other machines or equipment and they are covered by the WEEE directive when the end product is covered. Inclusion or exclusion depends on the application of the drive.

The WEEE directive does not apply to drives which are used in large-scale fixed installations, large-scale stationary industrial tools, means of transport for persons and goods, or non-road mobile machinery made available exclusively for professional use. We recommend to contact local environmental authorities for up-to-date information about national recycling requirements.

1.5 Frame size

This manual covers all different frame sizes of the product family. The frame size is marked on the type designation label of the drive. The frame size is also shown in the rating tables for each drive type. The rating tables are in the drive user's manual.

1.6 Disclaimer


The information presented in this publication does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. Publication thereof does not convey nor imply any license under patent - or other industrial or intellectual - property rights.

2. PRODUCT MATERIALS

2.1 Contents of this chapter

This chapter describes the main components and product materials of the DCS880 drives.


2.2 Materials for frames H1 to H5

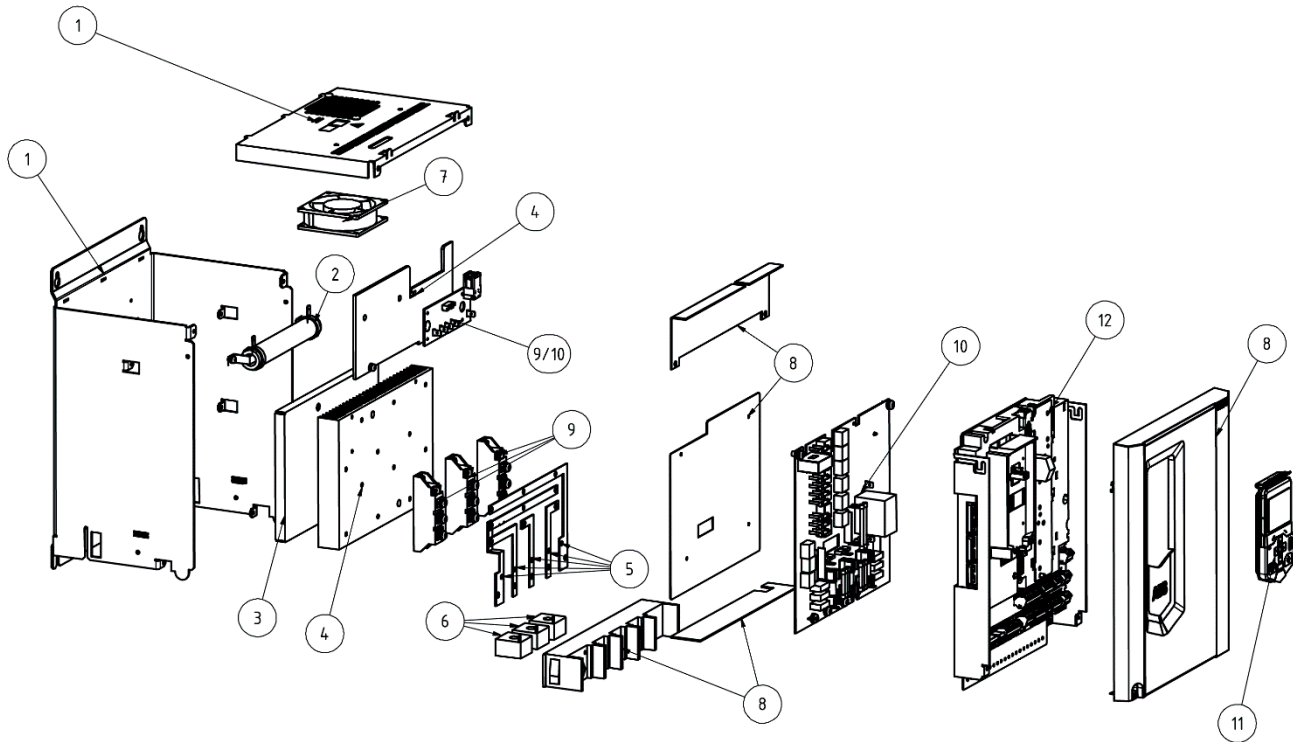


DCS880 frames H1 to H4 product materials				H1	H2	H3	H4	H5
				Total weight (kg) ~11	Total weight (kg) ~16	Total weight (kg) ~25	Total weight (kg) ~38	Total weight (kg) ~55
Part	Category	Qty	Materials	Weight (g)	Weight (g)	Weight (g)	Weight (g)	Weight (g)
1	Housing	2	hot-dip galvanized Fe	3950	4400	6010	9000	(3) / 11400
2	Resistor	1	Various materials	200	200	200	200	200
3	Sheet metal part	1	hot-dip galvanized Fe	570 / -	850 / -	-	-	990
4	Heat Sink	2	Aluminum AlMgSi	1590 / 2390	2500 / 4500	6930	9900	11400
5	Busbars	S01 5	Zn-plated CU	140	240 / 270	1290	(7) 1800	(16) 7850
		S02 5		270	370/430	(7) 2180	(7) 3050	(16) 7850
6	Current transformer	2	Various materials, plastic parts	- 540	500 -	600 -	600 -	600 -
7	Fan	1	Various materials, plastic parts	- / 80	-	-	2000	3000
		2		-	400	400	-	-
		4		-	-	560	-	-
8	Plastic parts	6	PC / PA66 / ABS / GPO3	770	725	835	1280	1430
9	Semiconductor	S01 3	Cu, AL oxide, Sn, silicone gel, PBT, GF	210	495	2250	4200	4200
		S02 6		240	990	4500	8400	8400
10	Printed circuit boards	2	Various materials, electronic components	840	840	840	840	840
11	Control panel	1	See subsection materials of the control panel on page 16	130	130	130	130	130
12	Control unit	1	See subsection Materials of the control unit on page 15	2000	2000	2000	2000	2000
13	Cables / Wires	N/A	PVC, Cu, GF, Sn, Au, Ni, phosphor bronze, thermoplastic polyester, glass filled nylon	150	150	150	200	200

2.3 Materials for frame H6

The main components are shown in the figure below.

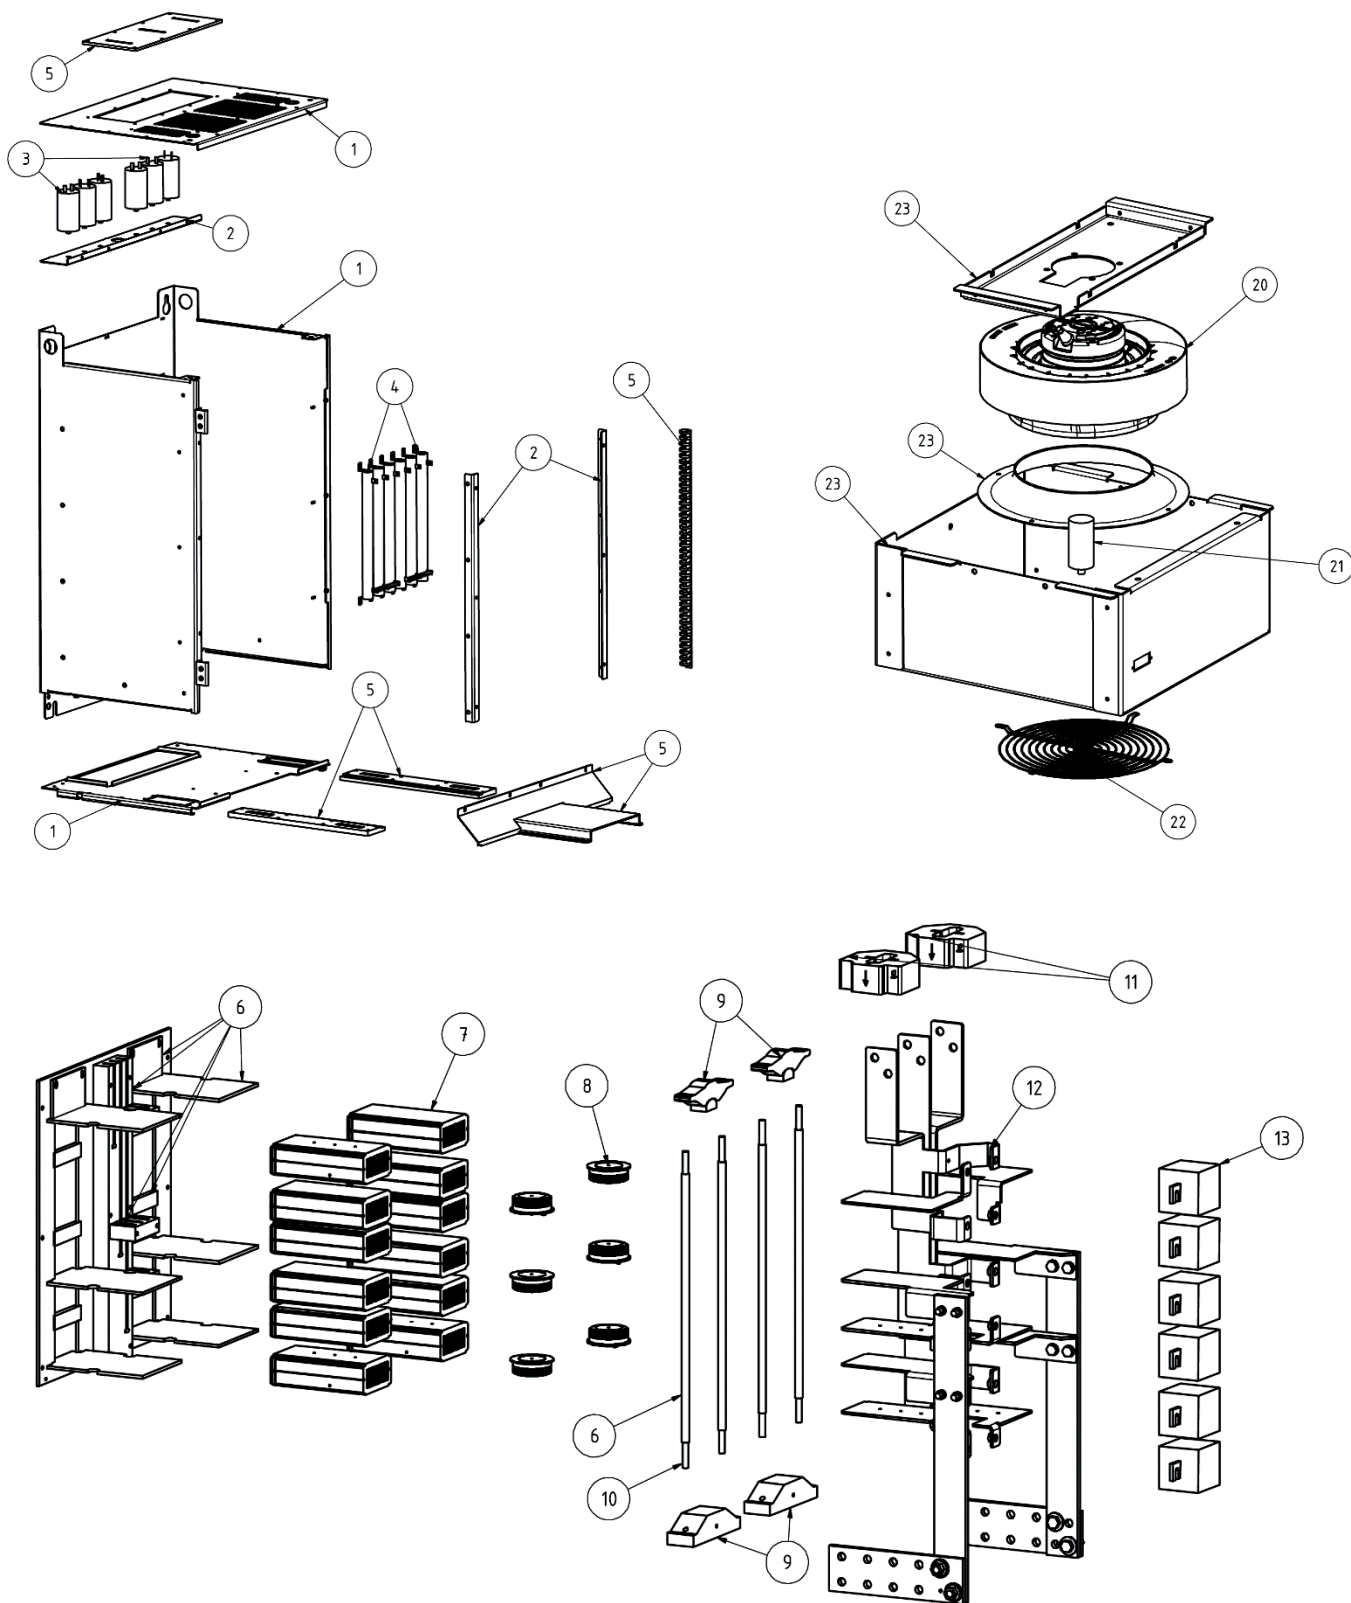


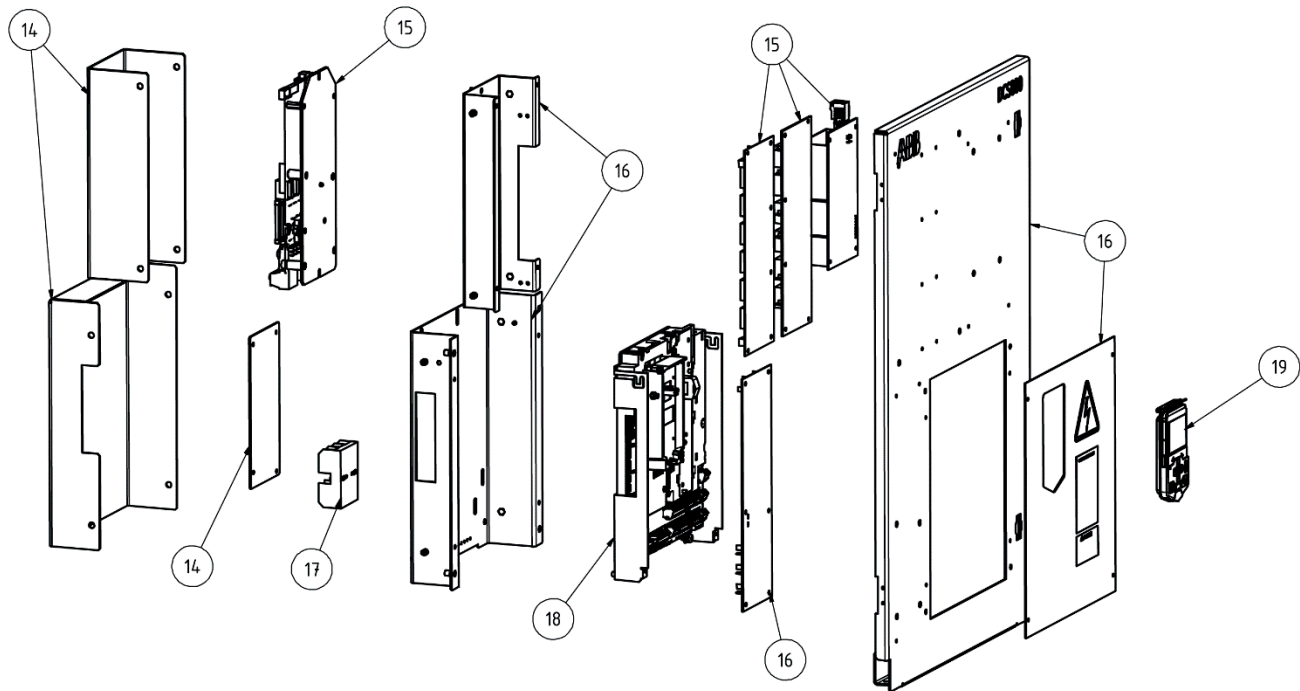


Part	Category	Qty	Materials	Weight (g)
1	Housing	3	hot-dip galvanized Fe	19500
2	Sheet metal part	3	hot-dip galvanized Fe	1100
3	Capacitor	6	Various materials, plastic parts	1500
4	Resistor	6	Various materials	1200
5	Plastic parts	5	PC / PA66 / ABS / GPO3 / MKHP	900
6	Plastic parts	23	GPO3 / PTFE	2200
7	Heat Sink	12	Aluminum AlMgSi	25200
8	Semiconductor S01	6	Cu, Al oxide, Sn, silicone gel, PBT, GF	3000
	S02	12		6000
9	Aluminum parts	4	Aluminum AlMgSi	2900
10	Steel parts	4	stainless steel	2400
11	Current transformer	2	Various materials	3400
12	Busbars	17	ZN-plated CU	23500
13	Fuse	6	Various materials	7200
14	Plastic parts	3	PC / PA66 / ABS	500
15	Printed circuit parts	2	Various materials, electronic components	2000
16	Sheet metal part	4	hot-dip galvanized Fe	9500
17	Fuse holder + Fuse	4	Various materials, plastic parts	600
18	Control unit	1	See subsection Materials of the control unit on page 15	2000
19	Control panel	1	See subsection materials of the control panel on page 16	130
20	FAN	1	Various materials, plastic parts	4000
21	Capacitor	1	Various materials, plastic parts	100
22	Steel parts	1	stainless steel	200
23	Sheet metal part	3	hot-dip galvanized Fe	6300

2.4 Materials for frame H7

The main components are shown in the figure below.

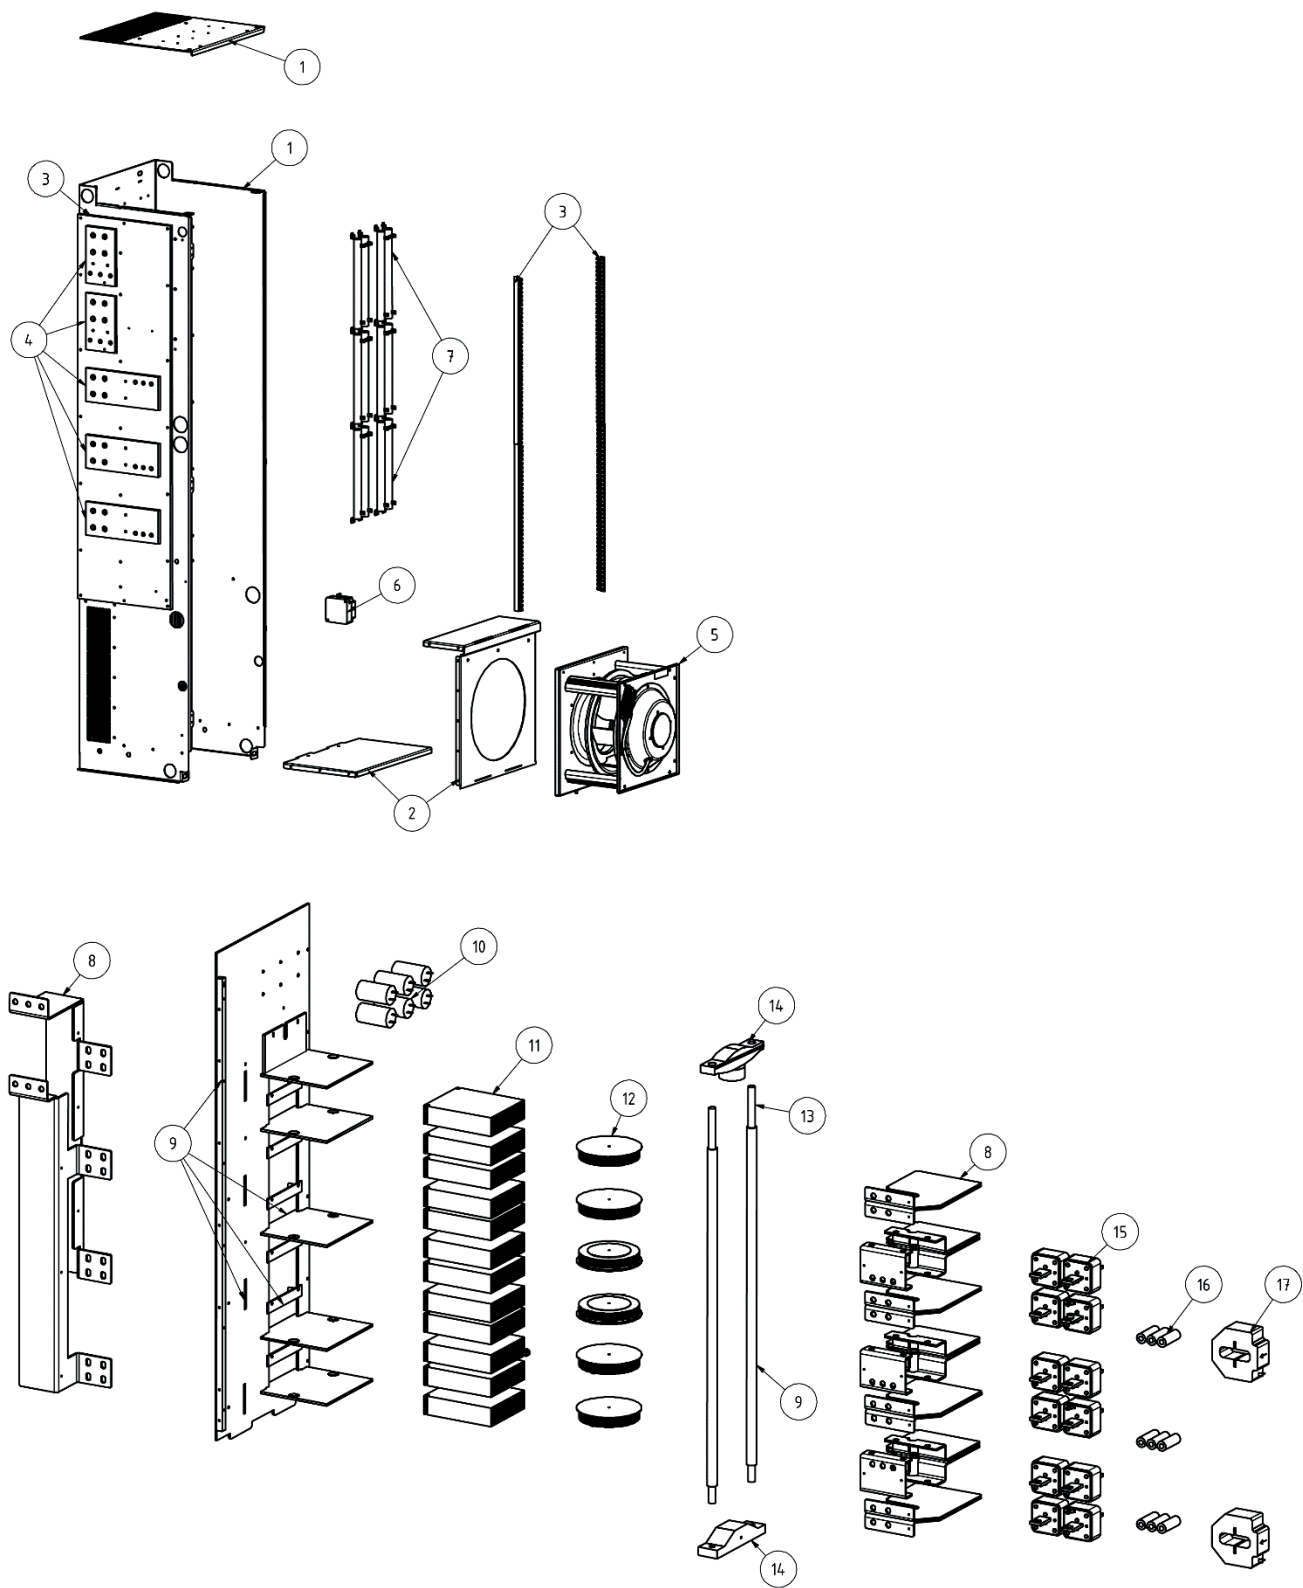


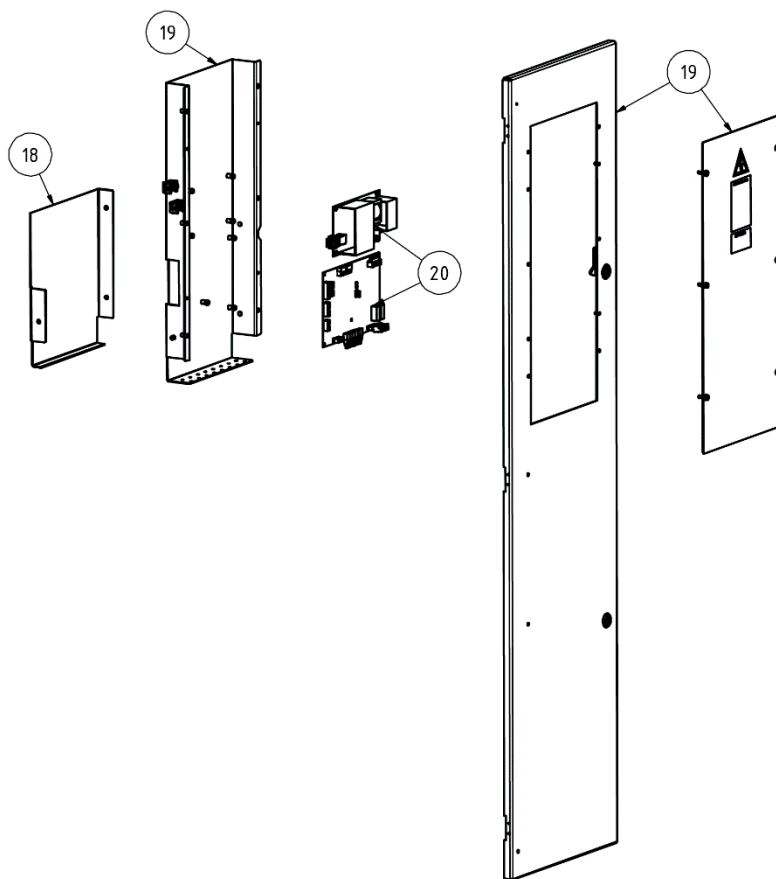


Part	Category	Qty	Materials	Weight (g)
1	Housing	3	hot-dip galvanized Fe	19500
2	Sheet metal part	3	hot-dip galvanized Fe	1100
3	Capacitor	6	Various materials, plastic parts	1500
4	Resistor	6	Various materials	1200
5	Plastic parts	5	PC / PA66 / ABS / GPO3 / MKHP	900
6	Plastic parts	23	GPO3 / PTFE	2200
7	Heat Sink	12	Aluminum AlMgSi	25200
8	Semiconductor S01	6	Cu, Al oxide, Sn, silicone gel, PBT, GF	3000
	S02	12		6000
9	Aluminum parts	4	Aluminum AlMgSi	2900
10	Steel parts	4	stainless steel	2400
11	Current transformer	2	Various materials	3400
12	Busbars	17	ZN-plated CU	23500
13	Fuse	6	Various materials	7200
14	Plastic parts	3	PC / PA66 / ABS	500
15	Printed circuit parts	2	Various materials, electronic components	2000
16	Sheet metal part	4	hot-dip galvanized Fe	9500
17	Fuse holder + Fuse	4	Various materials, plastic parts	600
18	Control unit	1	See subsection Materials of the control unit on page 15	2000
19	Control panel	1	See subsection materials of the control panel on page 16	130
20	FAN	1	Various materials, plastic parts	4000
21	Capacitor	1	Various materials, plastic parts	100
22	Steel parts	1	stainless steel	200
23	Sheet metal part	3	hot-dip galvanized Fe	6300

2.5 Materials for frame H8

The main components are shown in the figure below.

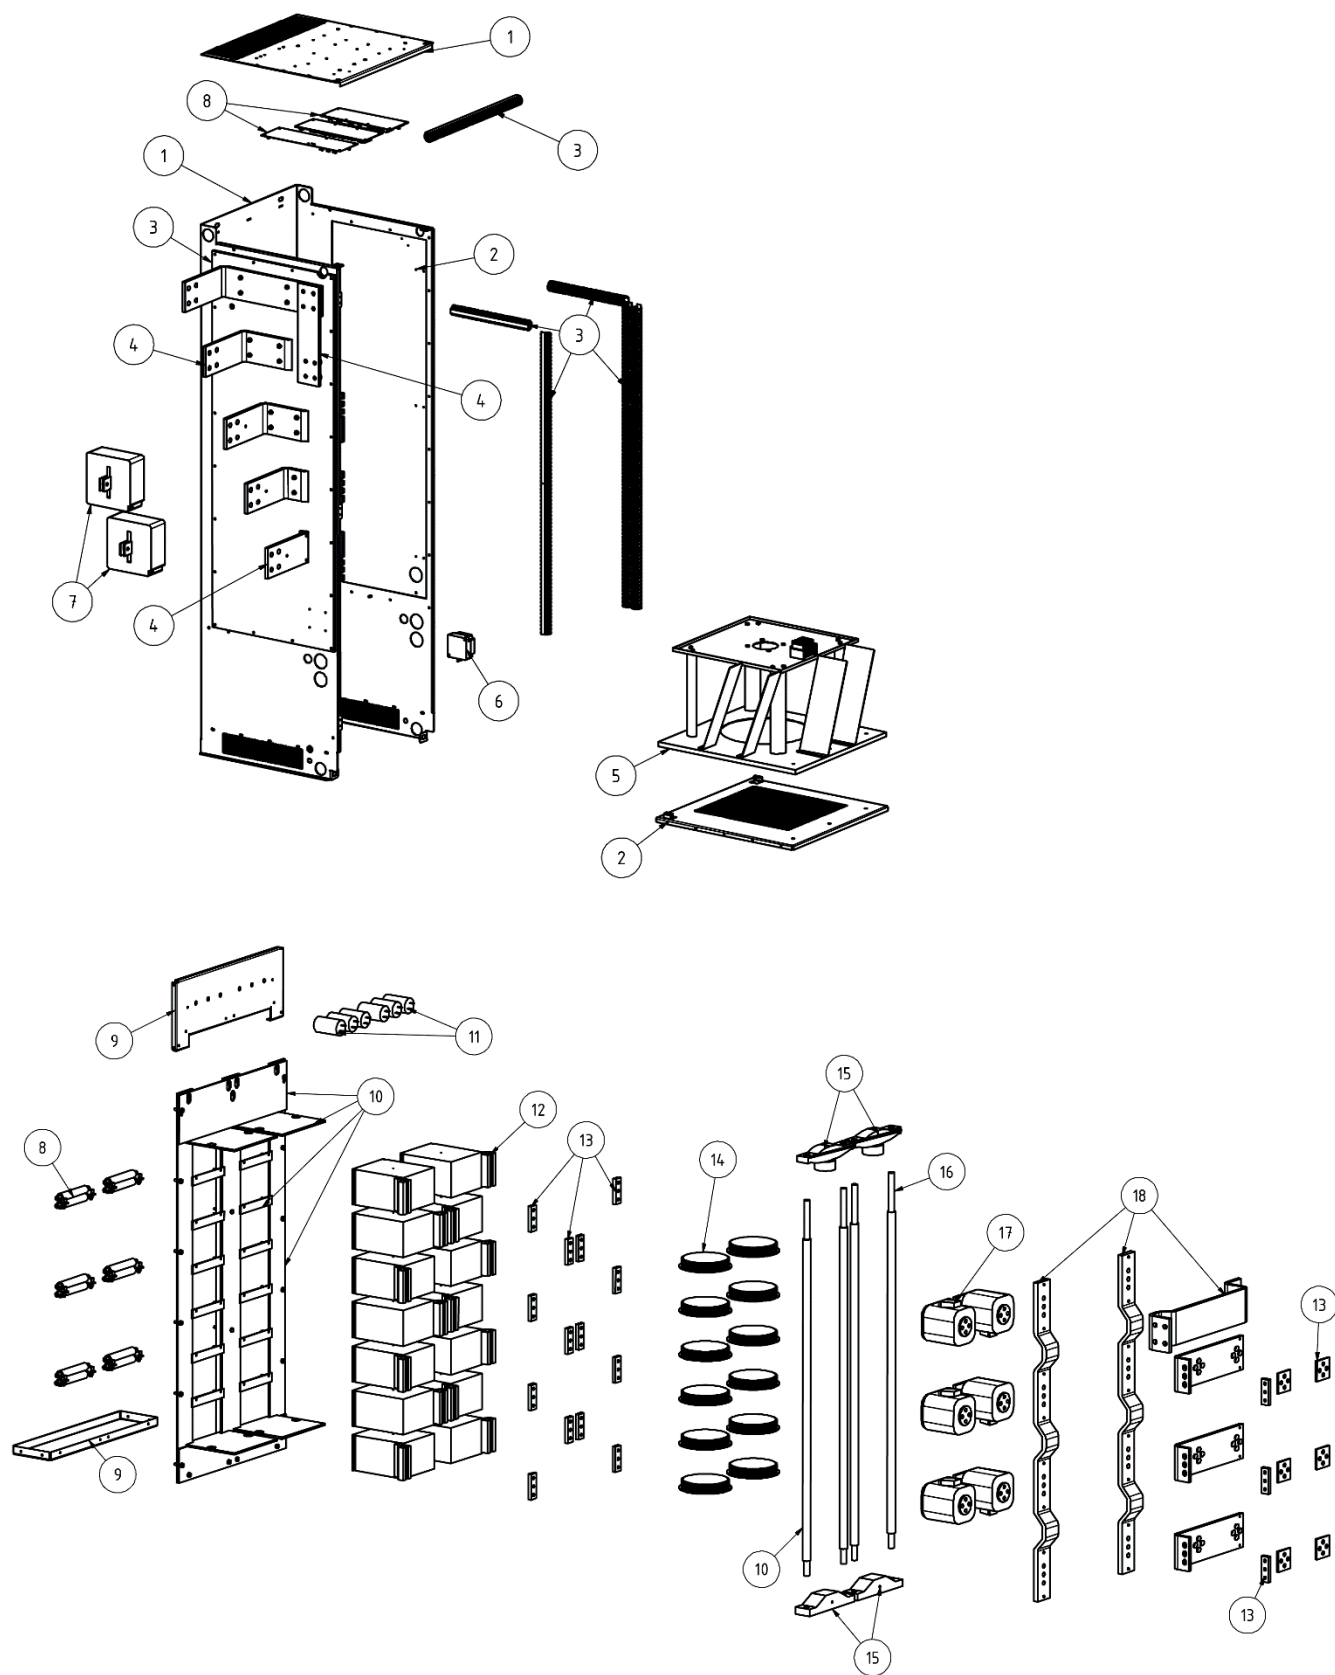


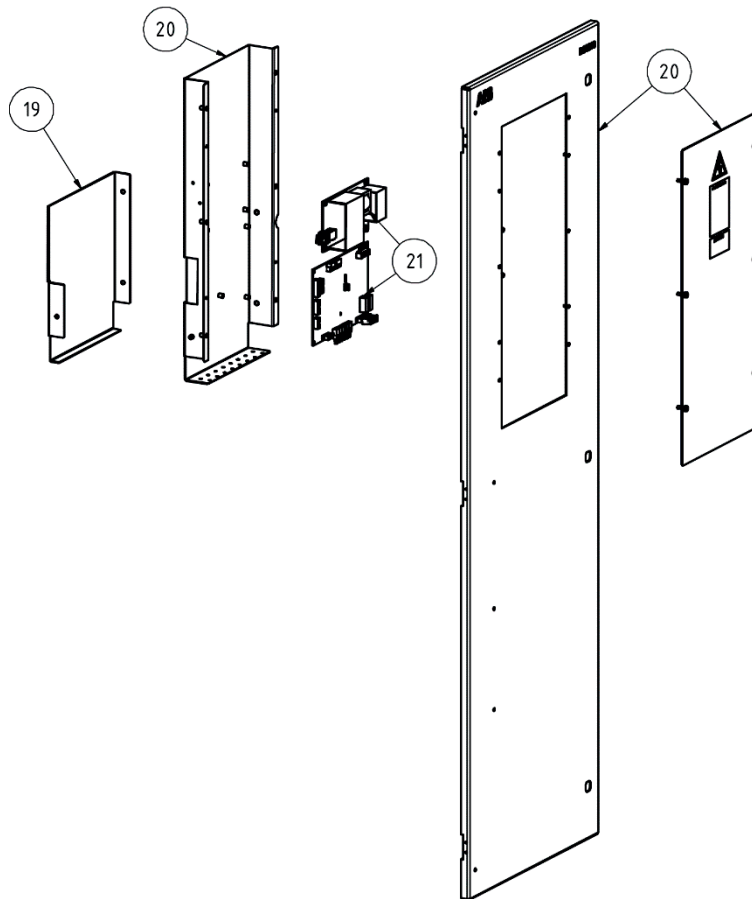

Part	Category	Qty	Materials	Weight (g)
1	Housing	2	hot-dip galvanized Fe	33500
2	Sheet metal part	2	hot-dip galvanized Fe	10000
3	Plastic parts	10	PC / PA66 / ABS / GPO3 / MKHP	10500
4	Busbars	6	ZN-plated CU	24000
5	FAN	1	Various materials, plastic parts	33000
6	Air pressure sensor	1	Various materials, plastic parts	400
7	Current transformer	2	Various materials, plastic parts	3400
8	Resistor	6/12	Various materials	1800/3600
9	Sheet metal part	2	hot-dip galvanized Fe	3200
10	Plastic parts	26	GPO3 / MKHP / PTFE	7500
11	Capacitor	6	Various materials, plastic parts	1500
12	Heat Sink	14	Aluminum AlMgSi	70000
13	Steel	23	ZN-plated Fe	3000
14	Semiconductor S01	6	Cu, Al oxide, Sn, silicone gel, PBT, GF	12500
	S02	12		25000
15	Aluminum parts	4	Aluminum AlMgSi	8000
16	Steel parts	4	stainless steel	7000
17	Fuses	6	Various materials	20000
18	Busbars	6	ZN-plated CU	29000
19	Plastic parts	1	PC	200
20	Sheet metal part	3	hot-dip galvanized Fe	17400
21	Printed circuit parts	2	Various materials, electronic components	1100

2.6 Materials for external Electronic – standard


The main components are shown in the figure below.

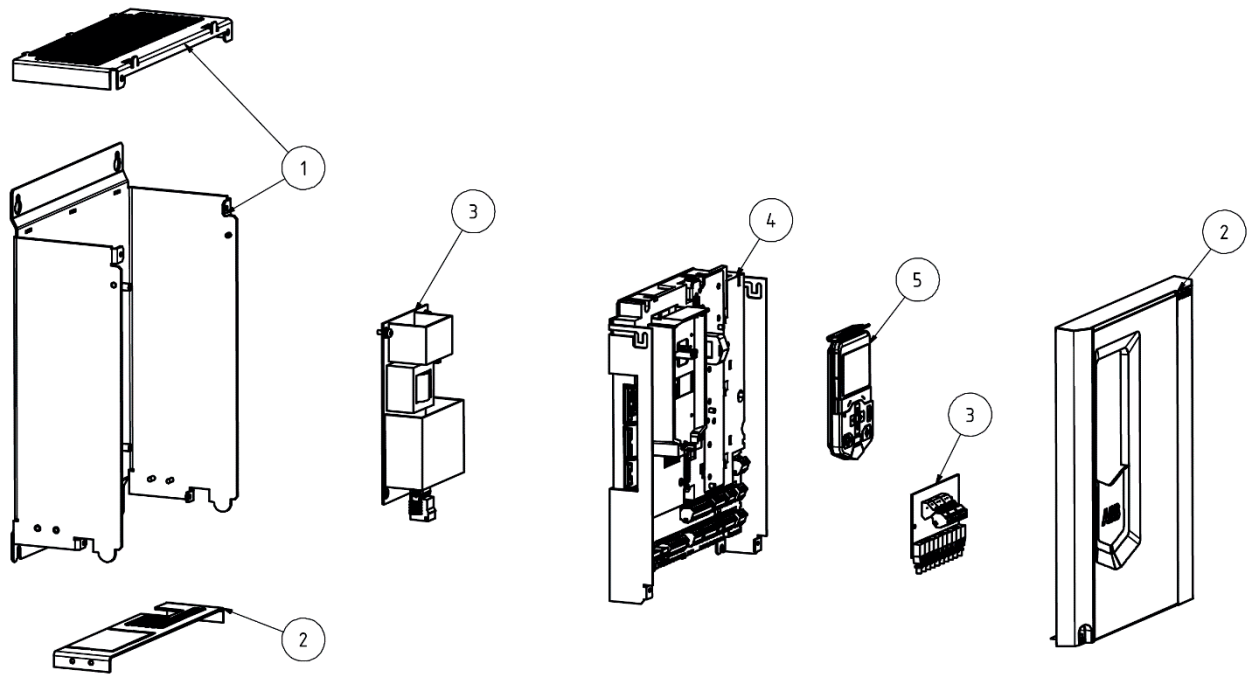

Part	Category	Qty	Materials	Weight (g)
1	Housing	2	hot-dip galvanized FE	2900
2	Plastic parts	2	PC / ABS	500
3	Printed circuit boards	2	Various material, electronic components.	600
4	Control unit	1	see page 15	200
5	Control panel	1	see page 16	100

2.7 Materials for external Electronic – swing frame


The main components are shown in the figure below.

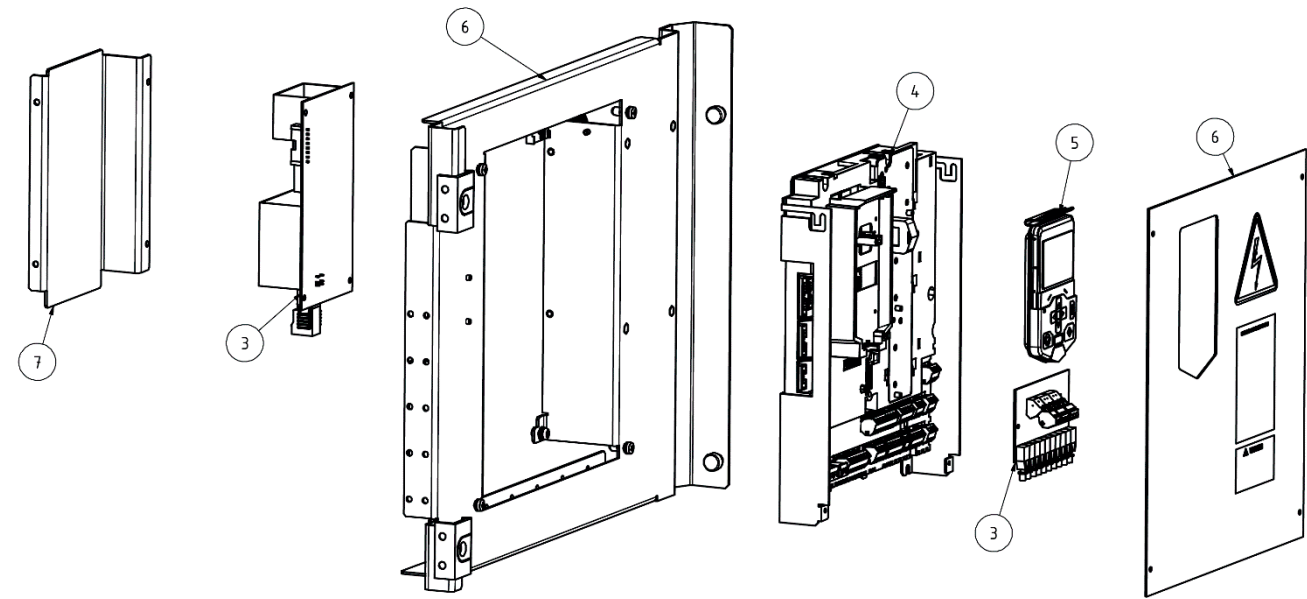

Part	Category	Qty	Materials	Weight (g)
3	Printed circuit boards	2	Various material, electronic components.	600
4	Control unit	1	see page 15	200
5	Control panel	1	see page 16	100
6	Steel parts	2	hot-dip galvanized FE / 600 mm	4800
		2	800 mm	6000
7	Plastic part	1	PC	100

2.8 Materials of the control unit


The main components are shown in the figure below.

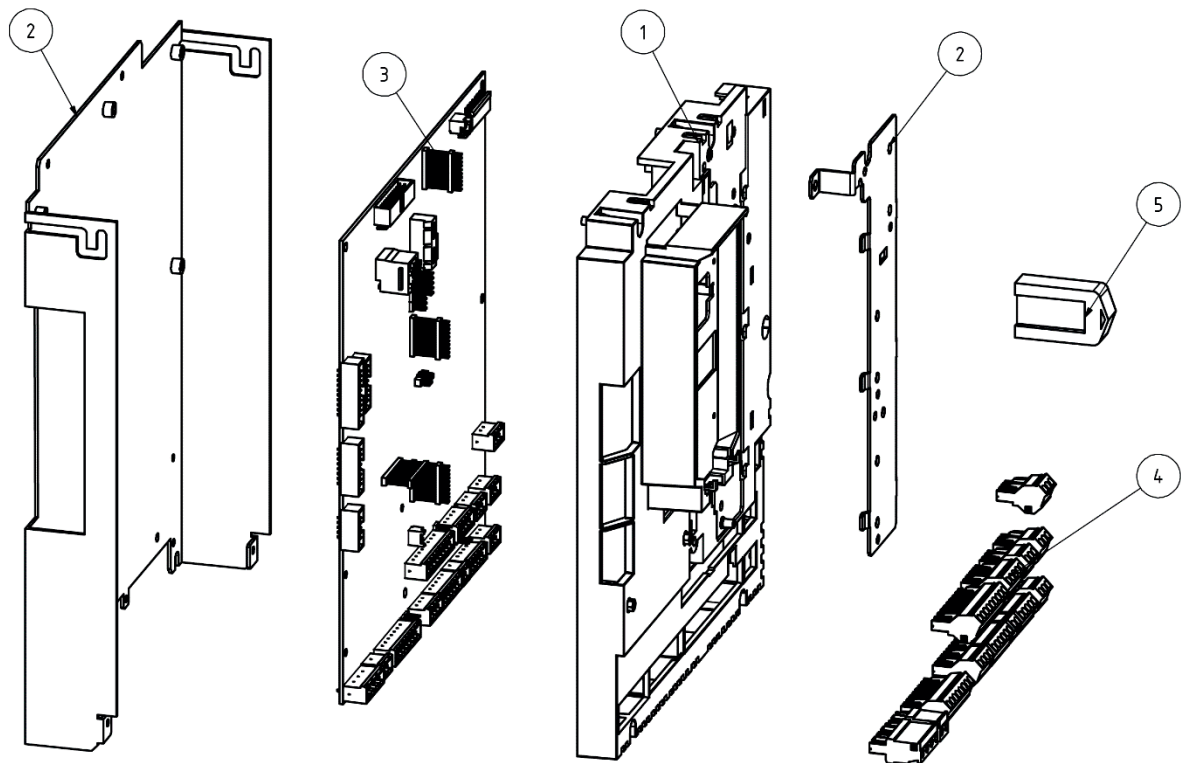

Part	Category	Qty	Materials	Weight (g)
1	Housing parts	1	Plastic: ABS PC	190
2	Sheet metal parts	1	Zn-plated Fe	1160
3	Printed circuit board	1	Various material, electronic components.	500
4	Connectors	13	PA plastic, Fe, Sn, Cu	120
5	Memory unit	1	Plastic: ABS, electronic components.	10

2.9 Materials of the control panel

The main components are shown in the figure below.

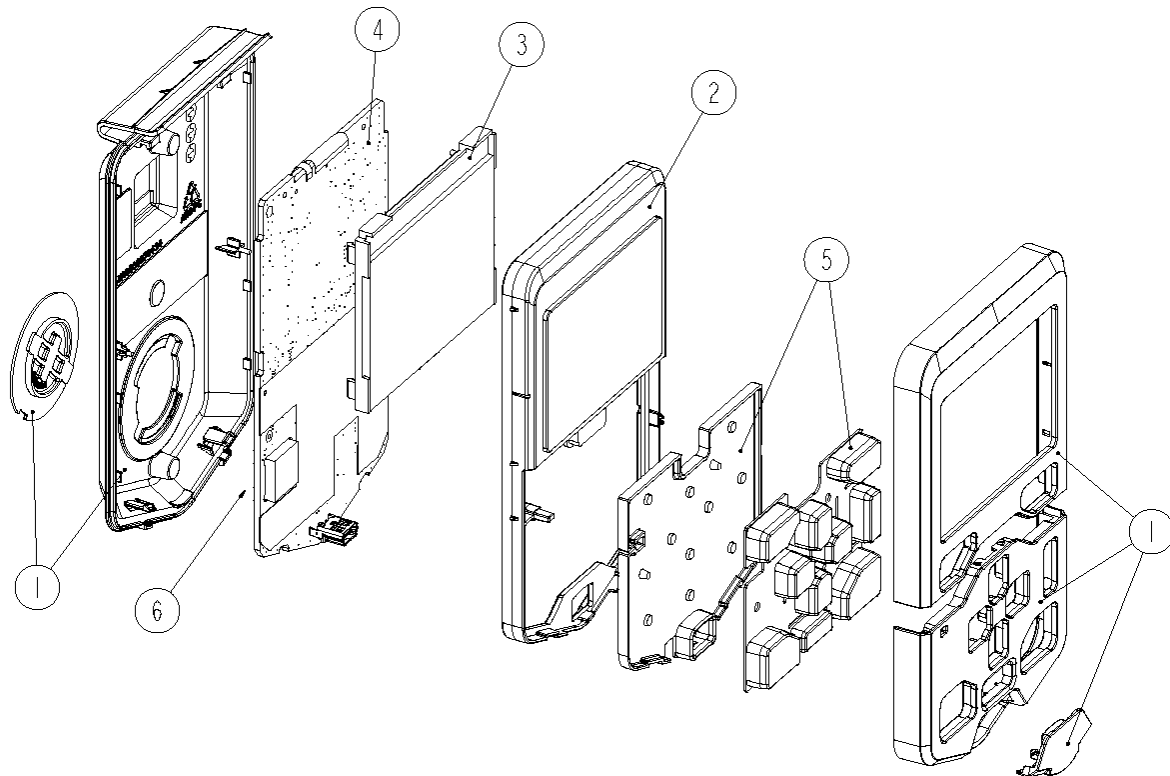

Part	Category	Qty	Materials	Weight (g)
1	Housing parts	4	Plastic: ABS PC	40
2	Lens	1	Plastic: PC	15
3	LCD display	1	Various materials	20
4	Printed circuit board	1	Various material, electronic components.	45
5	Keypad	2	Silicone rubber	20
6	CR 2032 lithium battery	1	Various materials	3

2.10 Package

The product package is made of corrugated cardboard. You can recycle all materials used in the package. To avoid pollution caused by unnecessary transportation, the factory does not take back used packages. The local ABB companies give instructions on the package recycling when necessary. ABB recommends package recycling as it preserves raw materials and reduces waste being landfilled.

2.11 Product manuals and sales brochures

To save natural resources and reduce paper waste, all product manuals are available in ABB Library and on the Internet.

3. MANUFACTURING AND USE

3.1 Manufacturing

ABB Automation Products GmbH (Germany) has a company-wide integrated quality, environmental and occupational health & safety management system. The system is certified in accordance with requirements of the international standards ISO 9001:2015 and ISO 14001:2015. The Integrated Management System applies to all units of the company.

3.2 Use

The use of a drive has several positive environmental impacts, such as:

- Process control is optimized. An electric drive enables a process to achieve the right speed and torque while maintaining its accuracy.
- Need for maintenance is reduced. Being able to vary the speed and torque of an electric motor means there is less wear and tear on the motor and the driven machine.

4. PRODUCT DISPOSAL

4.1 Contents of this chapter

This chapter contains product disposal instructions.

4.2 Disposal

The main parts of the drive can be recycled to preserve natural resources and energy. Product parts and materials should be dismantled and separated.

Generally all metals, such as steel, aluminum, copper and its alloys, and precious metals can be recycled as material. Plastics, rubber, cardboard and other packaging material can be used in energy recovery.

Printed circuit boards and DC capacitors need selective treatment according to IEC 62635 guidelines.

To aid recycling, plastic parts are marked with an appropriate identification code.

Contact your local ABB distributor for further information on environmental aspects. End of life treatment must follow international and national regulations.

4.3 Dismantling

You can dismantle the drive manually or in a shredding machine. The chapter is divided in two sections on basis of the dismantling method.

4.3.1 Manual dismantling

Sort the parts of the product according to their material contents as follows:

- ferrous metals (plates, screws)
- aluminum (heatsink)
- plastics
- printed circuit boards
- electrolytic capacitors
- other.

You can recycle metal parts (iron and aluminum) and most of the other materials according to local regulations. For information on harmful materials, see subsection ABB list of prohibited and restricted substances.

4.3.2 Mechanical shredding

In this method, a whole product is mechanically shredded into small pieces and materials are sorted using dedicated sorting processes. Remove the harmful material before shredding the drive in the shredder.

4.4 ABB list of prohibited and restricted substances

The purpose of this list is to comply with legislation to avoid chemical substances that may present hazards to the environment or the health.

This document provides information about “Prohibited substances”, substances that must not be used, and “Restricted substances”, substances whose use should be limited within ABB.

Definitions and regulations of hazardous materials differ from country to country and are likely to change when knowledge of materials increases. The materials used in the product are materials typically used in electrical and electronic equipment.

4.4.1 Reference list


1. Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS II).
2. Regulation No 1907/2006/EC of the European Parliament and of the Council of 18 December 2006 concerning the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH):
 - Annex XIV: List of substances subject to authorization
 - Annex XVII: Restrictions on use of substances in articles
 - SVHC: Candidate list of substances of very high concern for authorization.
3. Directive 2012/19/EU of the European Parliament and of the Council of 4 July 2012 on waste electrical and electronic equipment (WEEE).

4.5 Recycling information in accordance with the WEEE

The product is marked with the wheelie bin symbol. It indicates that at the end of life the product should enter the recycling system.

You should dispose of it separately at an appropriate collection point and not place it in the normal waste stream.

The figure below shows the wheelie bin symbol indicating separate collection for electrical and electronic equipment (EEE).

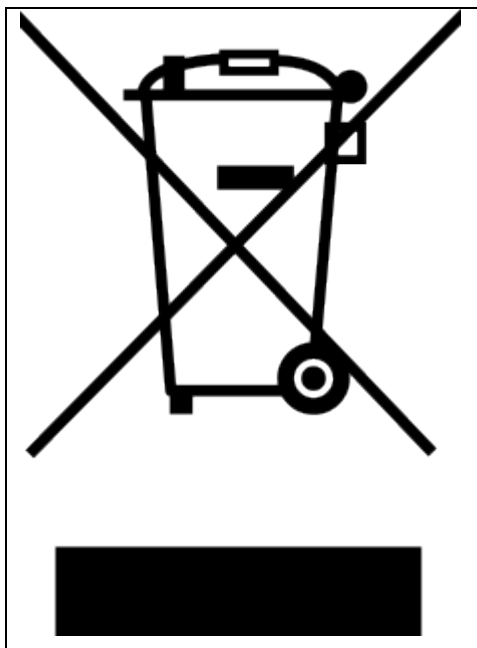

The horizontal bar underneath the crossed-out wheelie bin indicates that the equipment has been manufactured after the Directive came into force in 2005. The wheelie bin symbol is added to the type designation label of the product since 2017. The figure below shows an example.

<div><div></div><div>125,00</div><div></div></div>				
<div><div></div><div>20,00</div><div></div></div>	ABB Automation Products GmbH	U _{1IEC} : 3 ~ 230 - 525V _{AC}	U _{2IEC} : 0 - 545V _{DC}	Assembled in Poland
	Type: DCS880-S02-0050-05X0	I ₁ : 41A _{AC}	I ₂ : 50A _{DC}	
	Ser No: 1111111Aaabbcccc	f ₁ : 50/60Hz	I _f : 1 - 12A _{DC}	
		SCCR: 65kA	U _{Fan} : Internal	

125,00

ABB Automation Products GmbH
Wallstadter Straße 59
68526 Ladenburg, Germany

DCS880-S02-0050-05X0

Ser No: 1111111Aaabbcccc

Ser. No. Barcode

Rated Converter Data

U_{1IEC}: 3 ~ 230 - 525V_{AC}

I₁: 41A_{AC}

U_{Fan}: Internal

Size: H1

U_{2IEC}: 0 - 545V_{DC}

I₂: 50A_{DC}

Airflow: 57 m³/h

IP: 00

U_{1UL}: 3 ~ 230 - 525V_{AC}

I_f: 1 - 12A_{DC}

U_{Aux}: 115V_{AC} / 230V_{AC}

UL: open type

U_{2UL}: 0 - 545V_{DC}

f₁: 50/60Hz

SCCR: 65kA

Temp: 40°C

Designed by ABB in Germany

Assembled in Poland

LISTED 78WN
IND. CONT. EQ.

Functional
Safety

www.tuv.com
ID: 0500000000

85,00

A recycling example

This example complies with typical national regulations valid at the time of publishing this manual.

Materials	Recycling method
Steel	Recycled as material
Aluminum	Recycled as material
Plastics	Energy recovery (incineration)
Printed circuit boards	Recycled as WEEE
Electrolytic capacitors	Recycled as WEEE
Cables	Recycled as material
Ceramics	Landfilled
Other materials	Energy recovery (incineration)

5. FURTHER INFORMATION

5.1 Product and service inquiries

Address any inquiries about the product to your local ABB representative, quoting the type designation and serial number of the unit in question. A listing of ABB sales, support and service contacts can be found by navigating to www.abb.com/searchchannels.

5.2 Product training

For information on ABB product training, navigate to www.abb.com/drives and select Training courses.

5.3 Providing feedback on ABB Drives manuals

Your comments on our manuals are welcome.

Go to www.abb.com/drives and select Document Library – Manuals feedback form (LV AC drives).

5.4 Document library on the Internet

You can find manuals and other product documents in PDF format on the Internet. Go to www.abb.com/drives and select Document Library. You can browse the library or enter selection criteria, for example a document code, in the search field.

5.5 ABB environment policy

You can find ABB's environmental policy on the Internet at new.abb.com/sustainability/environment-policy.

5.6 ABB group sustainability objectives

For information on ABB group sustainability objectives, navigate to new.abb.com/sustainability/creating-value/objectives

6. ABB LIST OF PROHIBITED AND RESTRICTED SUBSTANCES

You can find the ABB list of prohibited and restricted substances at new.abb.com/sustainability/environment.

7. ABB AUTOMATION PRODUCTS

DCS550

ABB offers the machine building industry a DC drive which combines state-of-the-art drive technology with proven DC technology. The new converter series is suited both for new installations and retrofit-ting, due to its robust technology and compact design.

Integrated "Winder", programmability and a powerful field converter provide machine manufacturers with a maximum of flexibility in terms of machine integration.

AC500

ABB's powerful flagship PLC offering provides wide range of performance levels and scalability within a single simple concept where most competitors require multiple product ranges to deliver similar functionality.

Programmability

Automation Builder integrates the engineering and maintenance for PLC, drives, motion, HMI and robotics. It complies with the IEC 61131-3 standard offering all five IEC programming languages for PLC and drive configuration. Automation Builder supports a number of languages and comes with new libraries, FTP functions, SMTP, SNMP, smart diagnostics and debugging capabilities

DC motors

ABB's DMI generation of DC motors turns many ingrained concepts upside down

Thanks to creative innovations and state-of-the-art computerized optimization of technical solutions that earlier were considered to have reached the "design limits", a completely new generation of DC motors has evolved.

The DMI generation of DC motors offers completely new opportunities for improving productivity as a result of the substantially faster speed control. At the same time, the investment costs are lowered. Thanks to the precise optimization of the electrical and mechanical characteristics and the wide speed range, oversizing of motor drives to achieve the desired speed range is unnecessary.



DCT880

ABB's DCT880 offers their customers a thyristor power controller for the accurate control of ohmic or inductive heating elements and infrared radiators in glass, plastic, annealing, drying, melting or heating applications. DCT880 controllers are available in eight compact sizes, ranging from 20 A to 4,200 A

The integrated three-phase current measurement allows for implementing all load configurations from star, delta, single- and two-phase all the way to reactive-power optimized transformer control.

DCS880-R

The DCS880-R Rebuild Kit replaces the control electronics of an existing DC drive. All power components, including the thyristors, are retained. The DCS880-R Rebuild Kit is suitable for almost all existing drives from different manufacturers. In addition, ABB has developed specifically tailored solutions for some existing types of converter: this is a cost-efficient option for DC Drive revamping

ACS500-S

A PLC based modular automation solution that makes it easier than before to mix and match standard and safety I/O modules to expertly meet your safety requirements in all functional safety applications. "Extreme conditions" version is also offered.

All-compatible drives portfolio

The all-compatible drives share the same architecture; firmware platform, tools, user interfaces and options. Yet, there is an optimal drive from the smallest water pump to the biggest cement kiln, and everything in the between. When you have learned to use one drive it is easy use the other drives in the portfolio.

Jokab safety products

ABB Jokab Safety offers an extensive range of innovative products and solutions for machine safety systems. It is represented in standardization organisations for machine safety and works daily with the practical application of safety requirements in combination with production requirements.



Contacts

ABB Automation Products GmbH
Motors and Drives
Wallstadter Straße 59
68526 Ladenburg, Germany
www.abb.com/dc-drives

Document Number 3ADW000494R0201

