


# FM562

## Function modules

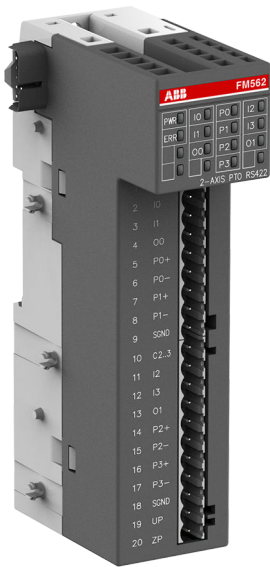


### 1 Ordering data

Part no.	Description	Product life cycle phase *)
1SAP 233 100 R0001	FM562, pulse-train output module, 2 axes, RS-422, 4 DI, 24 V DC	Classic
1TNE 968 901 R3101	Terminal block TA563-9, 9 pins, screw front, cable side, 6 pieces per unit	Active
1TNE 968 901 R3102	Terminal block TA563-11, 11 pins, screw front, cable side, 6 pieces per unit	Active
1TNE 968 901 R3103	Terminal block TA564-9, 9 pins, screw front, cable front, 6 pieces per unit	Active
1TNE 968 901 R3104	Terminal block TA564-11, 11 pins, screw front, cable front, 6 pieces per unit	Active
1TNE 968 901 R3105	Terminal block TA565-9, 9 pins, spring front, cable front, 6 pieces per unit	Active
1TNE 968 901 R3106	Terminal block TA565-11, 11 pins, spring front, cable front, 6 pieces per unit	Active



\*) Modules in lifecycle Classic are available from stock but not recommended for planning and commissioning of new installations.

## 2 Dimensions

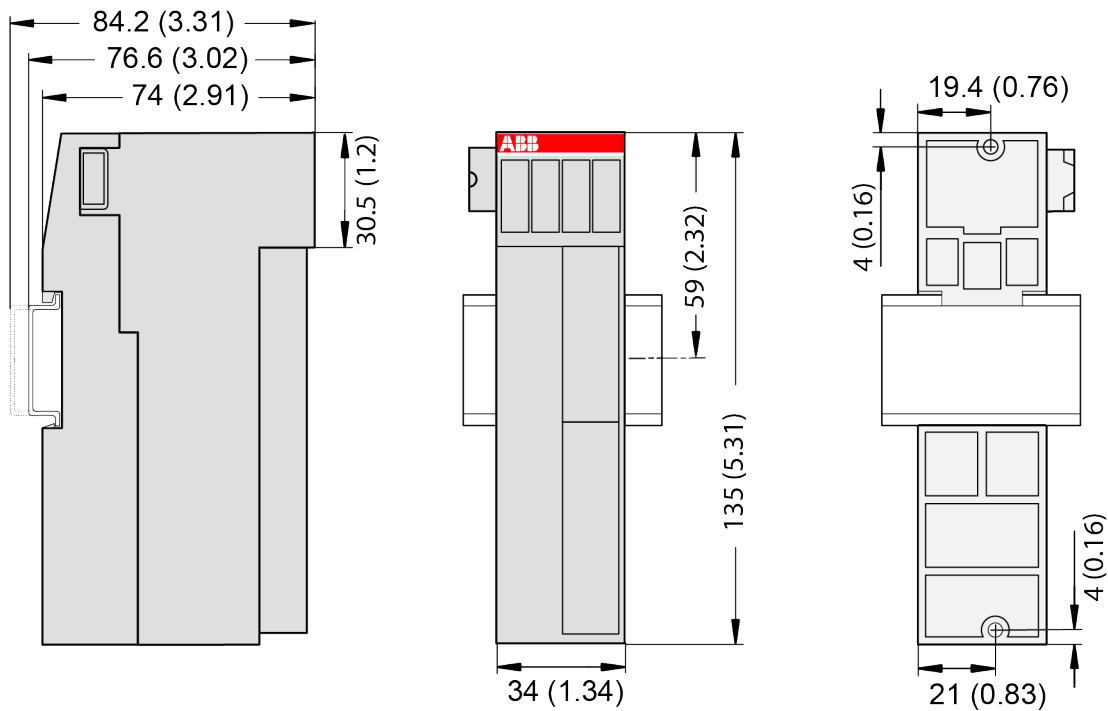

The dimensions are in mm and in brackets in inch.

## 3 Technical data

### 3.1 Technical data of the module

The system data of AC500-eCo apply.

🔗 Chapter 4 “System data AC500-eCo” on page 5

Only additional details are therefore documented below.

Parameter	Value
Digital inputs	4 inputs (2 per axis) 24 V DC, can be used as source inputs or as sink inputs
Input channels 0 and 2	Input signal used for axis enable and limit switch
Input channels 1 and 3	Stop, configurable
Input data length	32 bytes
Pulse outputs	<div>Pulse specification<ul style="list-style-type: none"><li>2 outputs for each axis, configurable</li><li>Type: RS-422 differential signal</li><li>Mode: CW &amp; CCW or Pulse &amp; Direction</li><li>Frequency: 10 Hz to 250 kHz</li><li>Pulse number: -2147483648 to 2147483647 (32 bits)</li><li>Motion profiles generator</li></ul></div>

Parameter	Value
Output data length	32 bytes
LED displays	For power supply, errors and signal states
Internal power supply	Via I/O bus
External power supply	Via the terminals ZP and UP (process voltage 24 V DC)

Process supply voltage UP	Value
Connections	Terminal 19 for UP (+24 V DC) and terminal 20 for ZP (0 V)
Rated value	24 V DC
Current consumption via UP terminal	42 mA
Max. ripple	5 %
Inrush current from UP (at power up)	0.067 A <sup>2</sup> s
Protection against reversed voltage	Yes
Rated protection fuse for UP	Not necessary
Current consumption from 24 V DC power supply at the L+/UP and M/ZP terminals of the CPU/communication interface module	Ca. 5 mA
Galvanic isolation	Yes, between input groups and the output group and the rest of the module
Isolated groups	5 groups (2 groups for 4 input channels, 1 group for 4 pulse train output channels, 1 group for process supply voltage, 1 group for the rest of the module)
Surge-voltage (max.)	35 V DC for 0.5 s
Max. power dissipation within the module	1.2 W
Weight	Ca. 125 g
Mounting position	Horizontal or vertical
Cooling	The natural convection cooling must not be hindered by cable ducts or other parts in the control cabinet.

### No effects of multiple overloads

No effects of multiple overloads on isolated multi-channel modules occur, as every channel is protected individually by an external fuse.

## 3.2 Technical data of the digital inputs

Parameter	Value
Number of channels per module	4
Distribution of the channels into axes	1 group of 2 channels for each axis
Axis 1	Inputs I0 ... I1
Axis 2	Inputs I2 ... I3
Connections of the channels I0 ... I1	Terminals 2 ... 3

Parameter		Value	
Connections of the channels I1 ... I3		Terminals 11 ... 12	
Reference potential for the channels I0 ... I1		Terminal 1 (Signal name C0 ... C1)	
Reference potential for the channels I2 to I3		Terminal 10 (Signal name C2 ... C3)	
Galvanic isolation		Yes, per axis	
Indication of the input signals		1 yellow LED per channel; the LED is ON when the input signal is high (signal 1)	
Input type according to EN 61131-2		Type 1 source	Type 1 sink
Input signal range		-24 V DC	+24 V DC
	Signal 0	-5 V ... +3 V	-3 V ... +5 V
	Undefined signal	-15 V ... +5 V	+5 V ... +15 V
	Signal 1	-30 V ... -15 V	+15 V ... +30 V
Ripple with signal 0		-5 V ... +3 V	-3 V ... +5 V
Ripple with signal 1		-30 V ... -15 V	+15 V ... +30 V
Input current per channel			
	Input voltage +24 V	Typ. 5 mA	
	Input voltage +5 V	Typ. 1 mA	
	Input voltage +15 V	> 2.5 mA	
	Input voltage +30 V	< 8 mA	
Max. permissible leakage current (at 2-wire proximity switches)		1 mA	
Input delay (0->1 or 1->0)		Typ. 0.1 ms ... 32 ms (configurable via software), default: 0.1 ms	
Max. cable length			
	Shielded	500 m	
	Unshielded	300 m	

### 3.3 Technical data of the pulse outputs

Parameter		Value
Number of channels		2 per axis, 4 per module
Output type		RS-422
Output mode		Clockwise and counter-clockwise or pulse and direction
Output frequency		10 Hz to 250 kHz
Frequency accuracy		
	From 10 Hz to 500 Hz	± 2 %
	From 501 Hz to 250 kHz	± 1 %
Differential output voltage (at terminal block)		2.8 V at 140 $\Omega$ differential load 2.56 V at 100 $\Omega$ differential load

Parameter		Value
Output voltage of positive output (P0+, P1+) referenced to SGND if used for single ended application		Max. 3.3 V without any load Typ. 2.5 V at 100 $\Omega$ load
Max. short circuit current		40 mA
Max. cable length		
	Shielded	300 m (at max. frequency, criterion: V $\geq 2$ V, tested with 100 $\Omega$ termination)
	Unshielded	30 m

## 4 System data AC500-eCo

### 4.1 Environmental conditions

Table 1: Process and supply voltages

Parameter		Value
24 V DC		
	Voltage	24 V (-15 %, +20 %)
	Protection against reverse polarity	Yes
24 V AC		
	Voltage	24 V (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
100 V AC ... 240 V AC wide-range supply		
	Voltage	100 V ... 240 V (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
Allowed interruptions of power supply, according to EN 61131-2		
	DC supply	Interruption < 10 ms, time between 2 interruptions > 1 s, PS2
	AC supply	Interruption < 0.5 periods, time between 2 interruptions > 1 s



#### NOTICE!

##### Risk of damaging the PLC due to improper voltage levels!

- Never exceed the maximum tolerance values for process and supply voltages.
  - Never fall below the minimum tolerance values for process and supply voltages.
- Observe the **system data** and the **technical data** of the used module.  
 Chapter 4 "System data AC500-eCo" on page 5



#### NOTICE!

Improper voltage level or frequency range which cause damage of AC inputs:

- AC voltage above 264 V
- Frequency below 47 Hz or above 62.4 Hz



**NOTICE!**  
Improper connection leads cause overtemperature on terminals.  
PLC modules may be destroyed by using wrong cable type, wire size and cable temperature classification.

Parameter		Value
Temperature		
	Operating	0 °C ... +60 °C (horizontal mounting of modules) 0 °C ... +40 °C (vertical mounting of modules and output load reduced to 50 % per group)
	Storage	-40 °C ... +70 °C
	Transport	-40 °C ... +70 °C
Humidity		Max. 95 %, without condensation
Air pressure		
	Operating	> 800 hPa / < 2000 m
	Storage	> 660 hPa / < 3500 m

4.2 Creepage distances and clearances

The creepage distances and clearances meet the requirements of the overvoltage category II, pollution degree 2.

4.3 Power supply units



*AC500 and AC500-eCo PLC devices are Class II/Class III devices and do not require a Protective Earth (PE) connection.*

*For proper EMC performance, all metal parts, DIN rails, mounting screws, and cable shield connection terminals are connected to a common ground and provide Functional Earth (FE). This is typically connected to a common reference potential, such as equipotential bonding rails.*

*Signal Grounds (SGND or GND) are used for signal reference and must not be connected to cable shields, FE or other signals unless otherwise specified in the specific device description.*

For the supply of the modules, power supply units according to SELV or PELV specifications must be used.



**Safety Extra Low Voltage (SELV) and Protective Extra Low Voltage (PELV)**

*To ensure electrical safety of AC500/AC500-eCo extra low voltage circuits, 24 V DC supply, communication interfaces, I/O circuits, and all connected devices must be powered from sources meeting requirements of SELV, PELV, class 2, limited voltage or limited power according to applicable standards.*

**WARNING!****Improper installation can lead to death by touching hazardous voltages!**

To avoid personal injury, safe separation, double or reinforced insulation and separation of the primary and secondary circuit must be observed and implemented during installation.

- Only use power converters for safety extra-low voltages (SELV) with safe galvanic separation of the primary and secondary circuit.
- Safe separation means that the primary circuit of mains transformers must be separated from the secondary circuit by double or reinforced insulation. The protective extra-low voltage (PELV) offers protection against electric shock.

## 4.4 Electromagnetic compatibility

Table 2: Range of use

Application
Device suitable only as <i>Control Equipment for Industrial Applications</i> .

Table 3: Electromagnetic compatibility

Parameter	Value
Device suitable only as <i>Control Equipment for Industrial Applications</i> , including marine applications. IEC 61131-2, zone B 🔗 Chapter 4.6 “Approvals and certifications” on page 9	
Radiated emission according to IEC 61000-6-4 CISPR11, class A	Yes
Conducted emission according to IEC 61000-6-4 CISPR11, class A	Yes
Electrostatic discharge (ESD) according to IEC 61000-4-2, criterion B	Air discharge: 8 kV Contact discharge: 6 kV
Fast transient interference voltages (burst) according to IEC 61000-4-4, criterion B	Power supply (DC): 2 kV Digital inputs/outputs (24 V DC): 1 kV Digital inputs/outputs (240 V AC): 2 kV Analog inputs/outputs: 1 kV Communication lines shielded: 1 kV

Parameter	Value
High energy transient interference voltages (surge) according to IEC 61000-4-5, criterion B	Power supply (DC): - Line to ground: 1 kV - Line to line: 0,5 kV Digital inputs/outputs/relay: (24 V DC): - Line to ground: 1 kV (AC): - Line to ground: 2 kV - Line to line: 1 kV Analog inputs/outputs: - Line to ground: 1 kV Communication lines: - Line to ground: 1 kV
Influence of radiated disturbances IEC 61000-4-3, criterion A	Test field strength: 10 V/m
Influence of line-conducted interferences IEC 61000-4-6, criterion A	Test voltage: 10 V
Power frequency magnetic fields IEC 61000-4-8, criterion A	30 A/m 50 Hz 30 A/m 60 Hz

## 4.5 Mechanical data

Parameter	Value
Mounting	Horizontal/Vertical
Wiring method	Spring/screw terminals
Degree of protection	PLC system: IP 20 <ul style="list-style-type: none"> <li>• with all modules or option boards plugged in</li> <li>• with all terminals plugged in</li> <li>• with all covers closed</li> </ul>
Housing	Classification V-2 according to UL 94
Vibration resistance (sinusoidal) acc. to IEC 60068-2-6	All three axes 2 Hz ... 8.4 Hz, 3.5 mm peak, 8.4 Hz ... 150 Hz, 1 g
Shock test acc. to IEC 60068-2-27	All three axes 15 g, 11 ms, half-sinusoidal
<b>Mounting of the modules:</b>	
Mounting Rail Top Hat according to IEC 60715	35 mm, depth 7.5 mm or 15 mm
Mounting with screws	M4
Fastening torque	1.2 Nm



## 4.6 Approvals and certifications

The PLC Automation catalog contains an *overview of the available approvals and certifications*.