


DATA SHEET

# DO526


## Digital output module

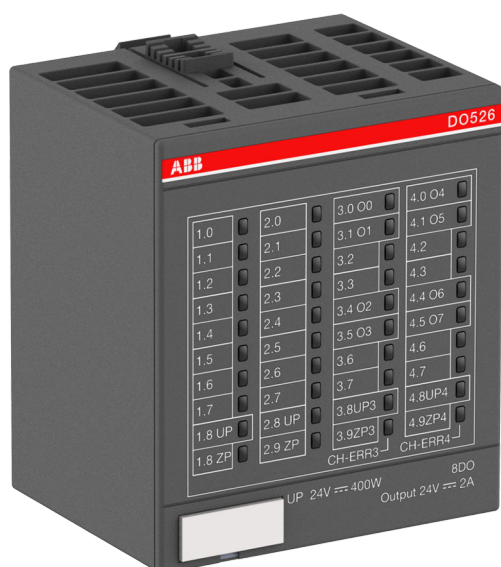

## 1 Ordering data

Part no.	Description	Product life cycle phase *)
1SAP 240 800 R0001	DO526, digital output module, 8 DO, 24 V DC / 2 A, 1-wire	Active
1SAP 440 800 R0001	DO526-XC, digital output module, 8 DO, 24 V DC / 2 A, 1-wire, XC version	Active
1SAP 213 200 R0001	TU542, I/O terminal unit, 24 V DC, spring terminals	Active
1SAP 413 200 R0001	TU542-XC, I/O terminal unit, 24 V DC, spring terminals, XC version	Active

## 2 Dimensions

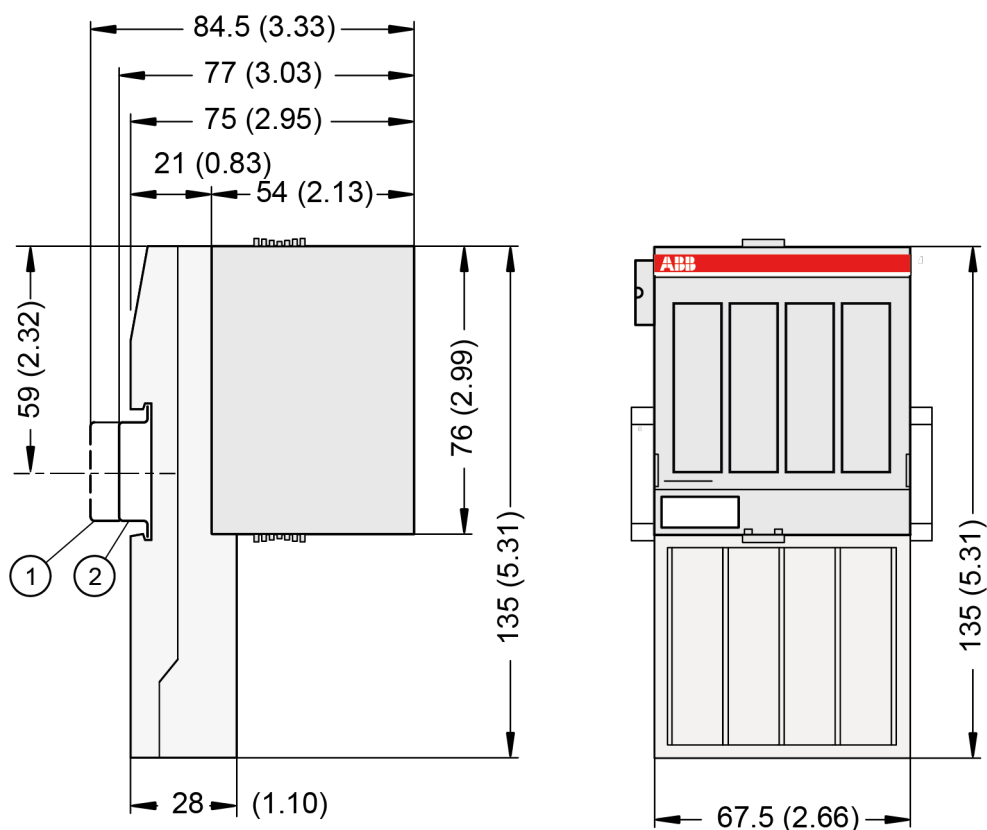

- 1 Din rail 15 mm
- 2 Din rail 7.5 mm



*The dimensions are in mm and in brackets in inch.*

### 3 Technical data

### 3.1 Technical data of the module

The system data of AC500 and S500 are applicable to the standard version. ↩ *Chapter 4 “System data AC500” on page 5.*

The system data of AC500-XC are applicable to the XC version  *Chapter 5 “System data AC500-XC” on page 8.*

Only additional details are therefore documented below.

The technical data are also applicable to the XC version.

Parameter		Value
Process supply voltage UP, UP3 and UP4		
	Connections	Terminals 1.8 and 2.8 for +24 V (UP) as well as 1.9 and 2.9 0 V (ZP)  Terminals 3.8 for +24 V (UP3) as well as 3.9 for 0 V (ZP3)  Terminals 4.8 for +24 V (UP4) as well as 4.9 for 0 V (ZP4)
	Rated value	24 V DC
	Max. ripple	5 %
	Protection against reversed voltage	Yes
	Rated protection fuse on UP, UP3 and UP4	10 A fast (for each process supply voltage)
	Galvanic isolation	Yes, per module and per output channel groups
Current consumption		
	From 24 V DC power supply at the terminals UP/L+ and ZP/M of the CPU/communication interface module	Ca. 2 mA
	From UP at normal operation / with outputs	Ca. 20 mA + 1.5 mA per output
	From UP3 or UP4 at normal operation / with outputs	Ca. 0.01 A + max. 2 A per output
	Inrush current from UP (at power up)	0.015 A²s
	Inrush current from UP3 or UP4 (at power up)	0.005 A²s (without output load)
Max. power dissipation within the module		6 W
Weight (without terminal unit)		Ca. 135 g
Mounting position		Horizontal  Or vertical with derating (output load reduced to 50 % at +40 °C per group)
Cooling		The natural convection cooling must not be hindered by cable ducts or other parts in the control cabinet.

**NOTICE!****Attention:**

All I/O channels (digital and analog) are protected against reverse polarity, reverse supply and continuous overvoltage up to 30 V DC.

### No effects of multiple overloads

No effects of multiple overloads on isolated multi-channel modules occur, as every channel is protected individually by an external fuse.

## 3.2 Technical data of the digital outputs

Parameter	Value
Number of channels per module	8 outputs (with transistors, non-latching type)
Distribution of the channels into groups	2 groups of 4 channels

Parameter		Value
Connection of the channels		
	O0 ... O3	Terminals 3.0, 3.1, 3.4, 3.5
	O4 ... O7	Terminals 4.0, 4.1, 4.4, 4.5
Indication of the output signals		1 yellow LED per channel, the LED is ON if the output signal is high (signal 1)
Power supply voltage for the module		Terminals 1.8 and 2.8 (positive pole of the process supply voltage, signal name UP)
Reference potential for module power supply		Terminals 1.9 and 2.9 (negative pole of the process supply voltage, signal name ZP)
Power supply voltage for the outputs O0 to O3		Terminal 3.8 (positive pole of the process supply voltage, signal name UP3)
Reference potential for the outputs O0 to O3		Terminal 3.9 (negative pole of the process supply voltage, signal name ZP3)
Power supply voltage for the outputs O4 to O7		Terminal 4.8 (positive pole of the process supply voltage, signal name UP4)
Reference potential for the outputs O4 to O7		Terminal 4.9 (negative pole of the process supply voltage, signal name ZP4)
Output voltage for signal 1		UP (-0.4 V)
Output delay (0->1 or 1->0)		On request
Output current		
	Rated value, per channel	2 A at UP3 or UP4 = 24 V
	Maximum value (channels O0 ... O3)	8 A
	Maximum value (channels O4 ... O7)	8 A
Leakage current with signal 0		< 0.1 mA
Rated protection fuse on UP		10 A fast
Demagnetization when inductive loads are switched off		With clamp diode in output high side driver
Switching frequency		
	With resistive load	On request
	With inductive loads	Max. 2 Hz
	With lamp loads	Max. 11 Hz with max. 48 W
Short-circuit proof / overload proof		No (should be done externally)
Overload message		No
Output current limitation		No (should be done externally)
Resistance to feedback against 24 V signals		Yes to UP3 or UP4. No to outputs in same group.
Max. cable length		
	Shielded	1000 m
	Unshielded	600 m

## 4 System data AC500

### 4.1 Environmental conditions

Table 1: Process and supply voltages

Parameter		Value
24 V DC		
	Voltage	24 V (-15 %, +20 %)
	Protection against reverse polarity	Yes
100 V AC...240 V AC wide-range supply		
	Voltage	100 V ... 240 V (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
Allowed interruptions of power supply, according to EN 61131-2		
	DC supply	Interruption < 10 ms, time between 2 interruptions > 1 s, PS2
	AC supply	Interruption < 0.5 periods, time between 2 interruptions > 1 s



#### NOTICE!

##### Risk of damaging the PLC due to improper voltage levels!

- Never exceed the maximum tolerance values for process and supply voltages.
  - Never fall below the minimum tolerance values for process and supply voltages.
- Observe the **system data** ↗ Chapter 4 “System data AC500” on page 5 and the **technical data** of the module used.



#### NOTICE!

Improper voltage level or frequency range which cause damage of AC inputs:

- AC voltage above 264 V
- Frequency below 47 Hz or above 62.4 Hz



#### NOTICE!

Improper connection leads cause overtemperature on terminals.

PLC modules may be destroyed by using wrong cable type, wire size and cable temperature classification.

Parameter		Value
Temperature		
	Operating	0 °C ... +60 °C: Horizontal mounting of modules. 0 °C ... +40 °C: Vertical mounting of modules. Output load reduced to 50 % per group.
	Storage	-40 °C ... +70 °C
	Transport	-40 °C ... +70 °C
Humidity		Max. 95 %, without condensation
Air pressure		

Parameter		Value
	Operating	> 800 hPa / < 2000 m
	Storage	> 660 hPa / < 3500 m

## 4.2 Creepage distances and clearances

The creepage distances and clearances meet the requirements of the overvoltage category II, pollution degree 2.

## 4.3 Power supply units



*AC500 and AC500-eCo PLC devices are Class II/Class III devices and do not require a Protective Earth (PE) connection.*

*For proper EMC performance, all metal parts, DIN rails, mounting screws, and cable shield connection terminals are connected to a common ground and provide Functional Earth (FE). This is typically connected to a common reference potential, such as equipotential bonding rails.*

*Signal Grounds (SGND or GND) are used for signal reference and must not be connected to cable shields, FE or other signals unless otherwise specified in the specific device description.*

For the supply of the modules, power supply units according to SELV or PELV specifications must be used.



### **Safety Extra Low Voltage (SELV) and Protective Extra Low Voltage (PELV)**

*To ensure electrical safety of AC500/AC500-eCo extra low voltage circuits, 24 V DC supply, communication interfaces, I/O circuits, and all connected devices must be powered from sources meeting requirements of SELV, PELV, class 2, limited voltage or limited power according to applicable standards.*



### **WARNING!**

#### **Improper installation can lead to death by touching hazardous voltages!**

To avoid personal injury, safe separation, double or reinforced insulation and separation of the primary and secondary circuit must be observed and implemented during installation.

- Only use power converters for safety extra-low voltages (SELV) with safe galvanic separation of the primary and secondary circuit.
- Safe separation means that the primary circuit of mains transformers must be separated from the secondary circuit by double or reinforced insulation. The protective extra-low voltage (PELV) offers protection against electric shock.

## 4.4 Electromagnetic compatibility

Table 2: Electromagnetic compatibility

Parameter	Value
Device suitable only as <i>Control Equipment for Industrial Applications</i> , including marine applications. IEC 61131-2, zone B 🔗 Chapter 4.6 “Approvals and certifications” on page 8	
Radiated emission according to IEC 61000-6-4 CISPR11, class A	Yes
Conducted emission according to IEC 61000-6-4 CISPR11, class A	Yes
Electrostatic discharge (ESD) according to IEC 61000-4-2, criterion B	Air discharge: 8 kV Contact discharge: 6 kV
Fast transient interference voltages (burst) according to IEC 61000-4-4, criterion B	Power supply (DC): 2 kV Digital inputs/outputs (24 V DC): 1 kV Digital inputs/outputs (240 V AC): 2 kV Analog inputs/outputs: 1 kV Communication lines shielded: 1 kV
High energy transient interference voltages (surge) according to IEC 61000-4-5, criterion B	Power supply (DC): - Line to ground: 1 kV - Line to line: 0,5 kV Digital inputs/outputs/relay: (24 V DC): - Line to ground: 1 kV (AC): - Line to ground: 2 kV - Line to line: 1 kV Analog inputs/outputs: - Line to ground: 1 kV Communication lines: - Line to ground: 1 kV
Influence of radiated disturbances IEC 61000-4-3, criterion A	Test field strength: 10 V/m
Influence of line-conducted interferences IEC 61000-4-6, criterion A	Test voltage: 10 V
Power frequency magnetic fields IEC 61000-4-8, criterion A	30 A/m 50 Hz 30 A/m 60 Hz

## 4.5 Mechanical data

Parameter	Value
Mounting	Horizontal/Vertical
Wiring method	Spring/screw terminals
Degree of protection	PLC system: IP 20 <ul style="list-style-type: none"> <li>with all modules or option boards plugged in</li> <li>with all terminals plugged in</li> <li>with all covers closed</li> </ul>
Housing	Classification V-2 according to UL 94
Vibration resistance (sinusoidal) acc. to IEC 60068-2-6	All three axes 2 Hz ... 8.4 Hz, 3.5 mm peak, 8.4 Hz ... 150 Hz, 1 g
Shock test acc. to IEC 60068-2-27	All three axes 15 g, 11 ms, half-sinusoidal
<b>Mounting of the modules:</b>	
Mounting Rail Top Hat according to IEC 60715	35 mm, depth 7.5 mm or 15 mm
Mounting with screws	M4
Fastening torque	1.2 Nm

## 4.6 Approvals and certifications

The PLC Automation catalog contains an [\*overview of the available approvals and certifications\*](#).

# 5 System data AC500-XC

## 5.1 Environmental conditions

Table 3: Process and supply voltages

Parameter	Value
24 V DC	
Voltage	24 V (-15 %, +20 %)
Protection against reverse polarity	Yes
100 V AC...240 V AC wide-range supply	
Voltage	100 V ... 240 V (-15 %, +10 %)
Frequency	50/60 Hz (-6 %, +4 %)
Allowed interruptions of power supply, according to EN 61131-2	
DC supply	Interruption < 10 ms, time between 2 interruptions > 1 s, PS2
AC supply	Interruption < 0.5 periods, time between 2 interruptions > 1 s



**NOTICE!****Risk of damaging the PLC due to improper voltage levels!**

- Never exceed the maximum tolerance values for process and supply voltages.
  - Never fall below the minimum tolerance values for process and supply voltages.
- Observe the **system data** ↗ *Chapter 4 “System data AC500” on page 5* and the **technical data** of the module used.

**NOTICE!**

Improper voltage level or frequency range which cause damage of AC inputs:

- AC voltage above 264 V
- Frequency below 47 Hz or above 62.4 Hz

**NOTICE!**

Improper connection leads cause overtemperature on terminals.

PLC modules may be destroyed by using wrong cable type, wire size and cable temperature classification.

Parameter		Value
Temperature		
	Operating	-40 °C ... +70 °C -40 °C ... 0 °C: Due to the LCD technology, the display might respond very slowly. -40 °C ... +40 °C: Vertical mounting of modules possible, output load limited to 50 % per group +60 °C ... +70 °C with the following deratings: <ul style="list-style-type: none"> <li>• System is limited to max. 2 communication modules per terminal base</li> <li>• Digital inputs: maximum number of simultaneously switched on input channels limited to 75 % per group (e.g. 8 channels =&gt; 6 channels)</li> <li>• Digital outputs: output current maximum value (all channels together) limited to 75 % per group (e.g. 8 A =&gt; 6 A)</li> <li>• Analog outputs only if configured as voltage output: maximum total output current per group is limited to 75 % (e.g. 40 mA =&gt; 30 mA)</li> <li>• Analog outputs only if configured as current output: maximum number of simultaneously used output channels limited to 75 % per group (e.g. 4 channels =&gt; 3 channels)</li> </ul>
	Storage / Transport	-40 °C ... +85 °C
Humidity		Operating / Storage: 100 % r. H. with condensation

Parameter	Value
Air pressure	Operating: -1000 m .... 5000 m (1080 hPa ... 620 hPa) > 2000 m (< 795 hPa): <ul style="list-style-type: none"> <li>• Max. operating temperature must be reduced by 10 K for each 1000 m exceeding 2000 m</li> <li>• I/O module relay contacts must be operated with 24 V nominal only</li> </ul>
Immunity to corrosive gases	Yes, according to: ISA S71.04.1985 Harsh group A, G3/GX IEC60068-2-60 Method 4 with following concentrations: <ul style="list-style-type: none"> <li>• H<sub>2</sub>S 100 ± 10ppb</li> <li>• NO<sub>2</sub> 1250 ± 20ppb</li> <li>• CL<sub>2</sub> 100 ± 10ppb</li> <li>• SO<sub>2</sub> 300 ± 20ppb</li> </ul>
Immunity to salt mist	Yes, horizontal mounting only, according to IEC 60068-2-52 severity level: 1

**NOTICE!****Risk of corrosion!**

Unused connectors and slots may corrode if XC devices are used in salt-mist environments.

Protect unused connectors and slots with TA535 protective caps for XC devices.

**NOTICE!****Risk of malfunctions!**

Unused slots for communication modules are not protected against accidental physical contact.

- Unused slots for communication modules must be covered with dummy communication modules to achieve IP20 rating.
- I/O bus connectors must not be touched during operation.

## 5.2 Creepage distances and clearances

The creepage distances and clearances meet the requirements of the overvoltage category II, pollution degree 2.

### 5.3 Power supply units



*AC500 and AC500-eCo PLC devices are Class II/Class III devices and do not require a Protective Earth (PE) connection.*

*For proper EMC performance, all metal parts, DIN rails, mounting screws, and cable shield connection terminals are connected to a common ground and provide Functional Earth (FE). This is typically connected to a common reference potential, such as equipotential bonding rails.*

*Signal Grounds (SGND or GND) are used for signal reference and must not be connected to cable shields, FE or other signals unless otherwise specified in the specific device description.*



#### **Safety Extra Low Voltage (SELV) and Protective Extra Low Voltage (PELV)**

*To ensure electrical safety of AC500/AC500-eCo extra low voltage circuits, 24 V DC supply, communication interfaces, I/O circuits, and all connected devices must be powered from sources meeting requirements of SELV, PELV, class 2, limited voltage or limited power according to applicable standards.*



#### **WARNING!**

#### **Improper installation can lead to death by touching hazardous voltages!**

To avoid personal injury, safe separation, double or reinforced insulation and separation of the primary and secondary circuit must be observed and implemented during installation.

- Only use power converters for safety extra-low voltages (SELV) with safe galvanic separation of the primary and secondary circuit.
- Safe separation means that the primary circuit of mains transformers must be separated from the secondary circuit by double or reinforced insulation. The protective extra-low voltage (PELV) offers protection against electric shock.

### 5.4 Electromagnetic compatibility

Table 4: Electromagnetic compatibility

Parameter	Value
Device suitable only as <i>Control Equipment for Industrial Applications</i> , including marine applications. IEC 61131-2, zone B 🔗 Chapter 5.6 “Approvals and certifications” on page 13	
Radiated emission according to IEC 61000-6-4 CISPR11, class A	Yes
Conducted emission according to IEC 61000-6-4 CISPR11, class A	Yes
Electrostatic discharge (ESD) according to IEC 61000-4-2, criterion B	Air discharge: 8 kV Contact discharge: 6 kV

Parameter	Value
Fast transient interference voltages (burst) according to IEC 61000-4-4, criterion B	Power supply (DC): 4 kV Digital inputs/outputs (24 V DC): 2 kV Digital inputs/outputs (240 V AC): 4 kV Analog inputs/outputs: 2 kV Communication lines shielded: 2 kV
High energy transient interference voltages (surge) according to IEC 61000-4-5, criterion B	Power supply (DC): - Line to ground: 1 kV - Line to line: 0,5 kV Digital inputs/outputs/relay: (24 V DC): - Line to ground: 1 kV (AC): - Line to ground: 2 kV - Line to line: 1 kV Analog inputs/outputs: - Line to ground: 1 kV Communication lines: - Line to ground: 1 kV
Influence of radiated disturbances IEC 61000-4-3, criterion A	Test field strength: 10 V/m
Influence of line-conducted interferences IEC 61000-4-6, criterion A	Test voltage: 10 V
Power frequency magnetic fields IEC 61000-4-8, criterion A	30 A/m 50 Hz 30 A/m 60 Hz

## 5.5 Mechanical data

Parameter	Value
Mounting	Horizontal/vertical (no application in salt mist environment)
Wiring method	Spring terminals
Degree of protection	PLC system: IP 20 <ul style="list-style-type: none"> <li>• with all modules or option boards plugged in</li> <li>• with all terminals plugged in</li> <li>• with all covers closed</li> </ul>
Housing	Classification V-2 according to UL 94
Vibration resistance (sinusoidal) acc. to IEC 60068-2-6	2 Hz ... 8.4 Hz, 3.5 mm peak, 8.4 Hz ... 500 Hz, 2 g
Vibration resistance (broadband random) acc. to IEC 60068-2-64	5 Hz ... 500 Hz, 1,9 g rms (operational) 5 Hz ... 500 Hz, 4 g rms (non operational)

Parameter	Value
Shock resistance	All three axes 15 g, 11 ms, half-sinusoidal
<b>Mounting of the modules:</b>	
Mounting Rail Top Hat according to IEC 60715	35 mm, depth 7.5 mm or 15 mm
Mounting with screws	M4
Fastening torque	1.2 Nm

## 5.6 Approvals and certifications

The PLC Automation catalog contains an [overview of the available approvals and certifications](#).