

DATA SHEET

DX531

Digital input/output module




1 Ordering data

Part no.	Description	Product life cycle phase *)
1SAP 245 000 R0001	DX531, digital input/output module, 8 DI, 120 / 230 V AC, 4 DO relays, 2-wires	Active



*) Modules in lifecycle Classic are available from stock but not recommended for planning and commissioning of new installations.

2 Dimensions

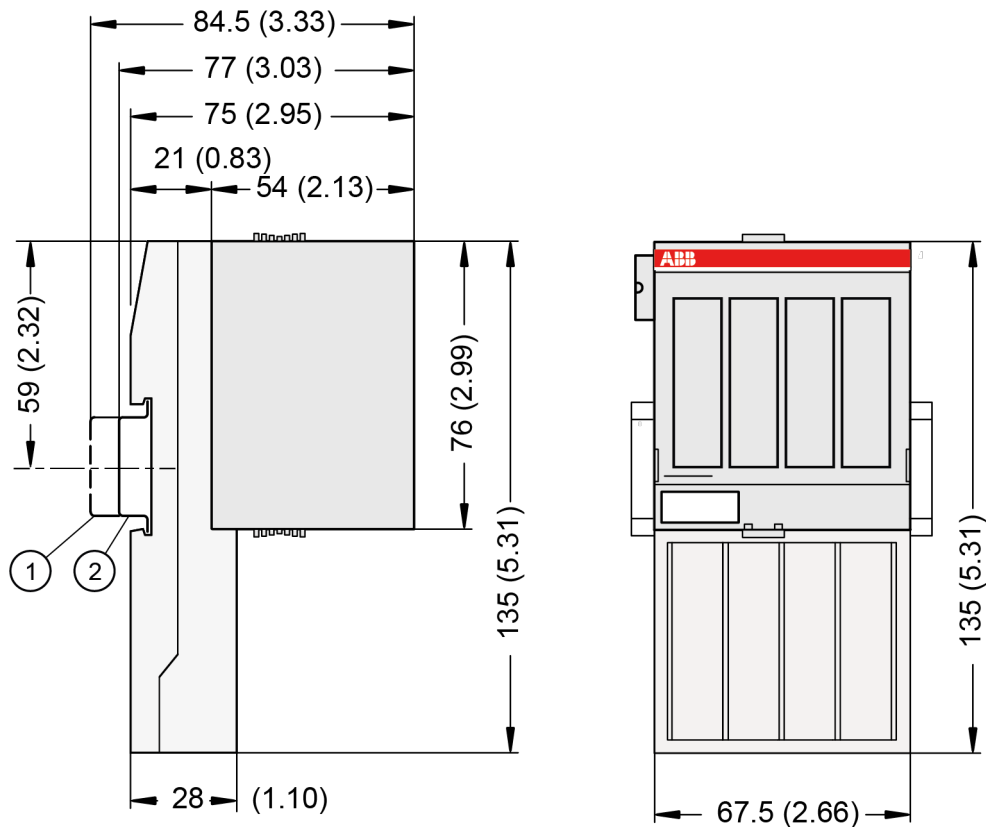

- 1 Din rail 15 mm
- 2 Din rail 7.5 mm



The dimensions are in mm and in brackets in inch.

3 Technical data

3.1 Technical data of the module

The system data of AC500 and S500 are applicable to the standard version ↗ *Chapter 4 “System data AC500” on page 5.*

The system data of AC500-XC are applicable to the XC version.

Only additional details are therefore documented below.

The technical data are also applicable to the XC version.

Parameter		Value
Process supply voltage UP		
	Connections	Terminals 1.8, 2.8, 3.8 and 4.8 for +24 V DC (UP) as well as 1.9, 2.9, 3.9 and 4.9 for 0 V DC (ZP)
	Rated value	24 V DC
	Max. ripple	5 %

Parameter		Value
	Protection against reversed voltage	Yes
	Rated protection fuse on UP	10 A fast
	Galvanic isolation	Yes, per module
Current consumption		
	From 24 V DC power supply at the terminals UP/L+ and ZP/M of the CPU/communication interface module	ca. 2 mA
	From UP at normal operation / with outputs	0.15 A + output loads
Inrush current from UP (at power up)		0.004 A ² s
Max. power dissipation within the module		6 W (outputs OFF)
Weight (without terminal unit)		Ca. 300 g
Mounting position		Horizontal or vertical with derating (output load reduced to 50 % at +40 °C per group)
Cooling		The natural convection cooling must not be hindered by cable ducts or other parts in the control cabinet.

**NOTICE!**

All I/O channels (digital and analog) are protected against reverse polarity, reverse supply, short circuit and temporary overvoltage up to 30 V DC.

No effects of multiple overloads

No effects of multiple overloads on isolated multi-channel modules occur, as every channel is protected individually by an external fuse.

3.2 Technical data of the digital inputs

Parameter	Value
Number of channels per module	8
Distribution of the channels into groups	4 groups of 2 channels each
Terminals of the channels I0 to I7	
Galvanic isolation	2500 V AC from the rest of the module (I/O bus)
Indication of the input signals	1 yellow LED per channel The LEDs are only operating if the module is initialized
Monitoring point of input indicator	LED is controlled by process CPU
Input type acc. to EN 61131-2	Type 2
Input delay (0->1 or 1->0)	Typ. 20 ms
Input signal voltage	230 V AC or 120 V AC
Input signal range	0 V AC ... 265 V AC
Input signal frequency	47 Hz ... 63 Hz
Input characteristic	According EN 61132-2 Type 2
Signal 0	0 V AC ... 40 V AC

Parameter		Value
Undefined signal		> 40 V AC ... < 74 V AC
Signal 1		74 V AC ... 265 V AC
Input current per channel		
	Input voltage = 159 V AC	> 7 mA
	Input voltage = 40 V AC	< 5 mA
Overvoltage protection		Yes
Max. cable length		
	Shielded	1000 m
	Unshielded	600 m

3.3 Technical data of the relay outputs

Parameter		Value
Number of channels per module		4 relay outputs
Distribution of channels into groups		4 groups of 1 channel each
Connection of the four relays		
Galvanic isolation		Between the channels and from the rest of the module
Indication of the output signals		1 yellow LED per channel, the LED is ON when the relay coil is energized
Monitoring point of output indicator		LED is controlled by process CPU
Way of operation		Non-latching type
Output delay (0->1 or 1->0)		On request
Relay power supply		By UP process supply voltage
Relay outputs		
	Output short circuit protection	Must be provided externally with a fuse or circuit breaker
	Rated protection fuse	6 A gL/gG per channel
Output switching capacity		
	Resistive load, max.	3 A; 3 A (230 V AC), 2 A (24 V DC)
	Inductive load, max.	1.5 A; 1.5 A (230 V AC), 1.5 A (24 V DC)
	Lamp load	60 W (230 V AC), 10 W (24 V DC)
Lifetime (cycles)		Mechanical: 300 000; Under load: 300 000 (24 V DC at 2 A), 200 000 (120 V AC at 2 A), 100 000 (230 V AC at 3 A)
Spark suppression with inductive AC load		Must be performed externally according to driven load specifications
Demagnetization with inductive DC load		A free-wheeling diode must be circuited in parallel to the inductive load
Switching frequency		
	With resistive load	Max. 10 Hz
	With inductive load	Max. 2 Hz

Parameter		Value
	With lamp load	On request
Max. cable length		
	Shielded	1000 m
	Unshielded	600 m

4 System data AC500

4.1 Environmental conditions


Table 1: Process and supply voltages

Parameter		Value
24 V DC		
	Voltage	24 V (-15 %, +20 %)
	Protection against reverse polarity	Yes
100 V AC...240 V AC wide-range supply		
	Voltage	100 V ... 240 V (-15 %, +10 %)
	Frequency	50/60 Hz (-6 %, +4 %)
Allowed interruptions of power supply, according to EN 61131-2		
	DC supply	Interruption < 10 ms, time between 2 interruptions > 1 s, PS2
	AC supply	Interruption < 0.5 periods, time between 2 interruptions > 1 s



NOTICE!

Risk of damaging the PLC due to improper voltage levels!

- Never exceed the maximum tolerance values for process and supply voltages.
 - Never fall below the minimum tolerance values for process and supply voltages.
- Observe the **system data**  Chapter 4 "System data AC500" on page 5 and the **technical data** of the module used.



NOTICE!

Improper voltage level or frequency range which cause damage of AC inputs:

- AC voltage above 264 V
- Frequency below 47 Hz or above 62.4 Hz



NOTICE!

Improper connection leads cause overtemperature on terminals.

PLC modules may be destroyed by using wrong cable type, wire size and cable temperature classification.

Parameter		Value
Temperature		
	Operating	0 °C ... +60 °C: Horizontal mounting of modules. 0 °C ... +40 °C: Vertical mounting of modules. Output load reduced to 50 % per group.
	Storage	-40 °C ... +70 °C
	Transport	-40 °C ... +70 °C
Humidity		Max. 95 %, without condensation
Air pressure		
	Operating	> 800 hPa / < 2000 m
	Storage	> 660 hPa / < 3500 m

4.2 Creepage distances and clearances

The creepage distances and clearances meet the requirements of the overvoltage category II, pollution degree 2.

4.3 Power supply units



AC500 and AC500-eCo PLC devices are Class II/Class III devices and do not require a Protective Earth (PE) connection.

For proper EMC performance, all metal parts, DIN rails, mounting screws, and cable shield connection terminals are connected to a common ground and provide Functional Earth (FE). This is typically connected to a common reference potential, such as equipotential bonding rails.

Signal Grounds (SGND or GND) are used for signal reference and must not be connected to cable shields, FE or other signals unless otherwise specified in the specific device description.

For the supply of the modules, power supply units according to SELV or PELV specifications must be used.



Safety Extra Low Voltage (SELV) and Protective Extra Low Voltage (PELV)

To ensure electrical safety of AC500/AC500-eCo extra low voltage circuits, 24 V DC supply, communication interfaces, I/O circuits, and all connected devices must be powered from sources meeting requirements of SELV, PELV, class 2, limited voltage or limited power according to applicable standards.


**WARNING!****Improper installation can lead to death by touching hazardous voltages!**

To avoid personal injury, safe separation, double or reinforced insulation and separation of the primary and secondary circuit must be observed and implemented during installation.

- Only use power converters for safety extra-low voltages (SELV) with safe galvanic separation of the primary and secondary circuit.
- Safe separation means that the primary circuit of mains transformers must be separated from the secondary circuit by double or reinforced insulation. The protective extra-low voltage (PELV) offers protection against electric shock.

4.4 Electromagnetic compatibility

Table 2: Electromagnetic compatibility

Parameter	Value
Device suitable only as <i>Control Equipment for Industrial Applications</i> , including marine applications. IEC 61131-2, zone B  Chapter 4.6 “Approvals and certifications” on page 8	
Radiated emission according to IEC 61000-6-4 CISPR11, class A	Yes
Conducted emission according to IEC 61000-6-4 CISPR11, class A	Yes
Electrostatic discharge (ESD) according to IEC 61000-4-2, criterion B	Air discharge: 8 kV Contact discharge: 6 kV
Fast transient interference voltages (burst) according to IEC 61000-4-4, criterion B	Power supply (DC): 2 kV Digital inputs/outputs (24 V DC): 1 kV Digital inputs/outputs (240 V AC): 2 kV Analog inputs/outputs: 1 kV Communication lines shielded: 1 kV
High energy transient interference voltages (surge) according to IEC 61000-4-5, criterion B	Power supply (DC): - Line to ground: 1 kV - Line to line: 0,5 kV Digital inputs/outputs/relay: (24 V DC): - Line to ground: 1 kV (AC): - Line to ground: 2 kV - Line to line: 1 kV Analog inputs/outputs: - Line to ground: 1 kV Communication lines: - Line to ground: 1 kV

Parameter	Value
Influence of radiated disturbances IEC 61000-4-3, criterion A	Test field strength: 10 V/m
Influence of line-conducted interferences IEC 61000-4-6, criterion A	Test voltage: 10 V
Power frequency magnetic fields IEC 61000-4-8, criterion A	30 A/m 50 Hz 30 A/m 60 Hz

4.5 Mechanical data

Parameter	Value
Mounting	Horizontal/Vertical
Wiring method	Spring/screw terminals
Degree of protection	PLC system: IP 20 <ul style="list-style-type: none"> with all modules or option boards plugged in with all terminals plugged in with all covers closed
Housing	Classification V-2 according to UL 94
Vibration resistance (sinusoidal) acc. to IEC 60068-2-6	All three axes 2 Hz ... 8.4 Hz, 3.5 mm peak, 8.4 Hz ... 150 Hz, 1 g
Shock test acc. to IEC 60068-2-27	All three axes 15 g, 11 ms, half-sinusoidal
Mounting of the modules:	
Mounting Rail Top Hat according to IEC 60715	35 mm, depth 7.5 mm or 15 mm
Mounting with screws	M4
Fastening torque	1.2 Nm

4.6 Approvals and certifications

The PLC Automation catalog contains an *overview of the available approvals and certifications*.